

INTERIOR SPACE ART LIGHTING



JIANGMEN RAYNICE LIGHTING CO.,LTD

FACTORY

NO.11 Minghui Road, High-tech industrial zones JiangMen City,GuangDong Province,China
Tel: (+86) 0750-8522688 Fax: (+86) 0750-8529704

SHOWROOM

B01-05, 10th Floor, Star Alliance, Guzhen Town, Zhongshan City

E-mail:raynice@raynice.com
Http://www.raynice.com

LIST

LED RECESSED SPOTLIGHT SERIES / 001-230

GELATO



003-004

GEO



005-014

PANDORA



015-032

GRIS



033-044

THUN



045-052

SIENA



053-056

GEMINI



057-060

FANO



061-064

MODICA



065-070

COMO



071-072

ROME



073-074

COLORFUL



075-076

COLLTE



077-078

TULLIO



079-098

ELF



099-104

RIMINI



105-112

PICCOLO



113-118

RIETI



119-126

TRANSFORMERS



127-130

SORI



131-132

VENICE



133-136

HELEN



137-140

GRID



141-142

TOMMASO



143-144

GRIYA



145-166

CUBE



167-172

FOCUS



173-182

SUN



183-190

DIX



191-194

SIRMI



195-204

MERLANO



205-210

MARCO



211-214

WATER



215-224

GUNTER



225-230

LED WALL WASHER LIGHT SERIES / 231-266

LODI



231-234

SARDIN



235-244

MILAN



245-250

PACO



251-252

AUGE



253-254

VERONA



255-260

DRO



261-262

LIST

LENNA



263-264

ORLANDO



265-266

LED SURFACE-MOUNTED SPOTLIGHT SERIES / 267-296

LECCO



267-280

PARMA




281-284

ENNA



285-286

MODENA



287-288

BARI



289-290

NICOLA



291-292

LUCCA



293-294

ASTI



295-296

LED RECESSED DOWNLIGHT SERIES / 297-310

TORINO



297-300

KONYA



301-302

EQUAL



303-304

TURIN



305-310

LED SURFACE-MOUNTED DOWNLIGHT SERIES / 311-314

RAVENNA



311-314

LIST

LED TRACK LIGHT SERIES / 315-334

BONN	VARY	PIRA	MILO	RICCI	PERIS
					
315-320	321-324	325-326	327-328	329-332	333-334

LED CELING LIGHT SERIES / 335-354

CARLO	MACARON
	
335-342	343-354

LED HANGING LIGHT SERIES /355-374



ANCO	VERDUN	MILK	DIY	ROMEO
				
355-364	365-366	367-368	369-370	371-374

LED WALL LIGHT SERIES / 375-380





JUNGLE


375-380

LED FLOOR LIGHT SERIES / 381-480

TRANI	BECK	VELA	ROSA	ALICE	GARDENA	ANNA
						
381-394	395-402	403-410	411-426	427-430	431-438	439-442

LIST

ADA	SELINI	CLOUD	EVE	TIME	MAIEN	METZ
						
443-444	445-446	447-454	455-456	457-458	459-460	461-462

ANZA	JULIA	NELLO	LARRY	CORSICA
				
463-466	467-470	471-472	473-474	475-480

LED TABLE LIGHT SERIES / 481-518

IVAN	SETTING SUN	SIGNAL	GRADA	SKYLIME
				
481-492	493-498	499-502	503-514	515-518

LED STRIP LIGHT SERIES / 519-524

STRIP

519-524

LED LINEAR LIGHT SERIES / 525-530

LINE

525-530



LED RECESSED SPOTLIGHT SERIES



001







002

GELATO



GELATO



SL74244/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 410Lm
Angle: 24°/18°/30°
CTN: 30
Material: Aluminum

SL74245/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 873Lm
Angle: 24°/18°/30°
CTN: 30
Material: Aluminum

SL74252/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 410Lm
Angle: 24°/18°/30°
CTN: 30
Material: Aluminum

SL74253/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 873Lm
Angle: 24°/18°/30°
CTN: 30
Material: Aluminum

Colortemperature



Color



- ☐ Sand White+Black
☐ Sand Black+Silver

IP	CRI
20	90

GEO



GEO



SL74299/7W


LED: Bridgelux COB
Power: 7W
Flux(Lm): 406Lm
Angle: 24°/18°/36°
CTN: 30
Material: Aluminum

SL74300/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 663Lm
Angle: 24°/18°/36°
CTN: 30
Material: Aluminum



Colortemperature





Color

■ Sand White+Black

IP	CRI
20	90

GEO



SL74297/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 406Lm
Angle: 24°/18°/36°
CTN: 30
Material: Aluminum

SL74298/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 663Lm
Angle: 24°/18°/36°
CTN: 30
Material: Aluminum

Colortemperature






Color

☐ Sand ☒ White+Black



GEO



SL74318/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 406Lm
Angle: 24°/18°/36°
CTN: 30
Material: Aluminum

SL74319/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 663Lm
Angle: 24°/18°/36°
CTN: 30
Material: Aluminum

Colortemperature




Color

☐ Sand ☒ White+Black




GEO



SL74342/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 406Lm
Angle: 24°/18°/36°
CTN: 30
Material: Aluminum

GEO



SL74343/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 663Lm
Angle: 24°/18°/36°
CTN: 30
Material: Aluminum

Colortemperature

2700K

3000K

4000K

Color

Sand White+Black

IP
20


CRI
90



GEO



GEO

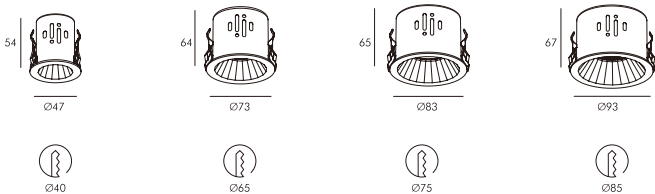

SL74543-2/3W

LED: Luminus COB
Power: 3W
Flux(Lm): 166Lm
Angle: 24°/36°
CTN: 50
Material: Aluminum+Iron

SL74543-2.5/7W

LED: Luminus COB
Power: 7W
Flux(Lm): 460Lm
Angle: 24°/36°
CTN: 30
Material: Aluminum+Iron

SL74543-3/10W

LED: Luminus COB
Power: 10W
Flux(Lm): 650Lm
Angle: 24°/36°
CTN: 30
Material: Aluminum+Iron


SL74543-3.5/15W

LED: Luminus COB
Power: 15W
Flux(Lm): 1035Lm
Angle: 36°
CTN: 30
Material: Aluminum+Iron

Colortemperature



Color






IP	CRI
20	90



GEO

GEO



SL74545-2.5/7W

LED: Luminus COB
Power: 7W
Flux(Lm): 408Lm
Angle: 20°/30°/36°
CTN: 30
Material: Aluminum+Iron


SL74545-3/10W

LED: Luminus COB
Power: 10W
Flux(Lm): 682Lm
Angle: 20°/30°/36°
CTN: 30
Material: Aluminum+Iron

SL745453.5/15W

LED: Luminus COB
Power: 15W
Flux(Lm): 875Lm
Angle: 20°/24°/36°
CTN: 30
Material: Aluminum+Iron



Colortemperature



Color



PANDORA



SL74579/10W


LED: Bridgelux COB
Power: 10W
Flux(Lm):
Angle:
CTN: 30
Material: Aluminum

SL74580/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm):
Angle:
CTN: 20
Material: Aluminum




Colortemperature





Color

Brush Nickel+Black



PANDORA




SL74581/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm):
Angle:
CTN: 20
Material: Aluminum

SL74582/18W


LED: Bridgelux COB
Power: 18W
Flux(Lm):
Angle:
CTN: 20
Material: Aluminum

Colortemperature





Color

Matt Black



PANDORA



SL74583/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm):
Angle:
CTN: 30
Material: Aluminum

SL74584/18W


LED: Bridgelux COB
Power: 18W
Flux(Lm):
Angle:
CTN: 20
Material: Aluminum

Colortemperature





Color

Brush Nickel+Black



PANDORA




SL74585/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm):
Angle:
CTN: 30
Material: Aluminum

SL74586/18W


LED: Bridgelux COB
Power: 18W
Flux(Lm):
Angle:
CTN: 20
Material: Aluminum

Colortemperature





Color

Matt Black



PANDORA




SL74587/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm):
Angle:
CTN: 30
Material: Aluminum

SL74588/15W


LED: Bridgelux COB
Power: 15W
Flux(Lm):
Angle:
CTN: 20
Material: Aluminum

Colortemperature





Color

 Brush Nickel+Black



PANDORA




SL74589/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm):
Angle:
CTN: 30
Material: Aluminum

SL74590/15W


LED: Bridgelux COB
Power: 15W
Flux(Lm):
Angle:
CTN: 20
Material: Aluminum

Colortemperature



Color

 Matt Black





PANDORA




SL74591/7W

LED: Luminus SMD
Power: 7W
Flux(Lm):
Angle:
CTN: 30
Material: Aluminum

Colortemperature



PANDORA



Color

 Brush Nickel+Black

IP	CRI
20	95

PANDORA





PANDORA

PANDORA



PANDORA



SL74232/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 801Lm
Angle: 24°/15°
CTN: 30
Material: Aluminum

SL74233/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 801Lm
Angle: 24°/15°
CTN: 30
Material: Aluminum

Colortemperature





Color (SL74232)



Color (SL74233)



PANDORA



SL74267/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 1399Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

SL74268/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 1399Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

Colortemperature





Color (SL74267)



Color (SL74268)



PANDORA



SL74236/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 813Lm
Angle: 24°/15°
CTN: 30
Material: Aluminum

SL74237/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 813Lm
Angle: 24°/15°
CTN: 30
Material: Aluminum

Colortemperature



Color




IP
20

CRI
90

PANDORA



PANDORA

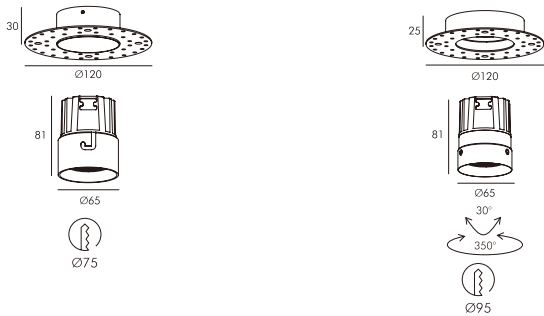

SL74269/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 1399Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

SL74270/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 1399Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

Colortemperature




Color



IP	CRI
20	90

PANDORA



SL74240/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 652Lm
Angle: 24°/15°
CTN: 30
Material: Aluminum

Colortemperature



Color




IP	CRI
20	90

PANDORA



PANDORA



SL74238/10W

SL74239/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 766Lm
Angle: 24°/15°/35°
CTN: 50
Material: Aluminum

LED: Bridgelux COB
Power: 10W
Flux(Lm): 714Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

Colortemperature





Color

Sand white

IP
20

CRI
90



SL74271/18W

SL74272/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 1328Lm
Angle: 24°/35°
CTN: 30
Material: Aluminum

LED: Bridgelux COB
Power: 18W
Flux(Lm): 1328Lm
Angle: 24°/35°
CTN: 30
Material: Aluminum

Colortemperature



Color

Sand White


IP
20

CRI
90

GRIS



GRIS

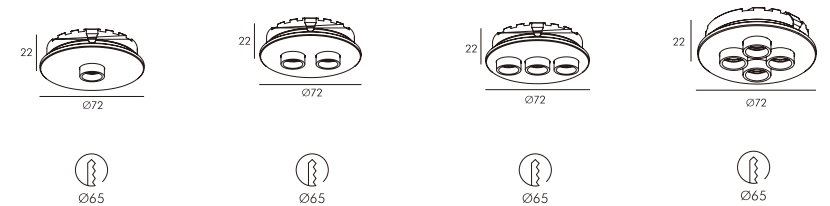

SL74537-1/1 x 3W

LED: Luminus SMD
Power: 1x3W
Flux(Lm): 210Lm
Angle: 20°/36°
CTN: 50
Material: Aluminum

SL74537-2/2 x 3W

LED: Luminus SMD
Power: 2x3W
Flux(Lm): 412Lm
Angle: 20°/36°
CTN: 50
Material: Aluminum


SL74537-3/3 x 3W

LED: Luminus SMD
Power: 3x3W
Flux(Lm): 640Lm
Angle: 20°/36°
CTN: 50
Material: Aluminum

SL74537-4/4 x 2.2W

LED: Luminus SMD
Power: 4x2.2W
Flux(Lm): 753Lm
Angle: 20°/36°
CTN: 50
Material: Aluminum

Colortemperature



Color




IP	CRI
20	90

GRIS



GRIS



SL74538-1/1 x 3W

LED: Luminus SMD
Power: 1x3W
Flux(Lm): 210Lm
Angle: 20°/36°
CTN: 50
Material: Aluminum

SL74538-2/2 x 3W

LED: Luminus SMD
Power: 2x3W
Flux(Lm): 412Lm
Angle: 20°/36°
CTN: 50
Material: Aluminum

SL74538-3/3 x 3W

LED: Luminus SMD
Power: 3x3W
Flux(Lm): 640Lm
Angle: 20°/36°
CTN: 50
Material: Aluminum

SL74538-4/4 x 2.2W

LED: Luminus SMD
Power: 4x2.2W
Flux(Lm): 779Lm
Angle: 20°/36°
CTN: 50
Material: Aluminum

Colortemperature




Color




IP	CRI
20	90



GRIS

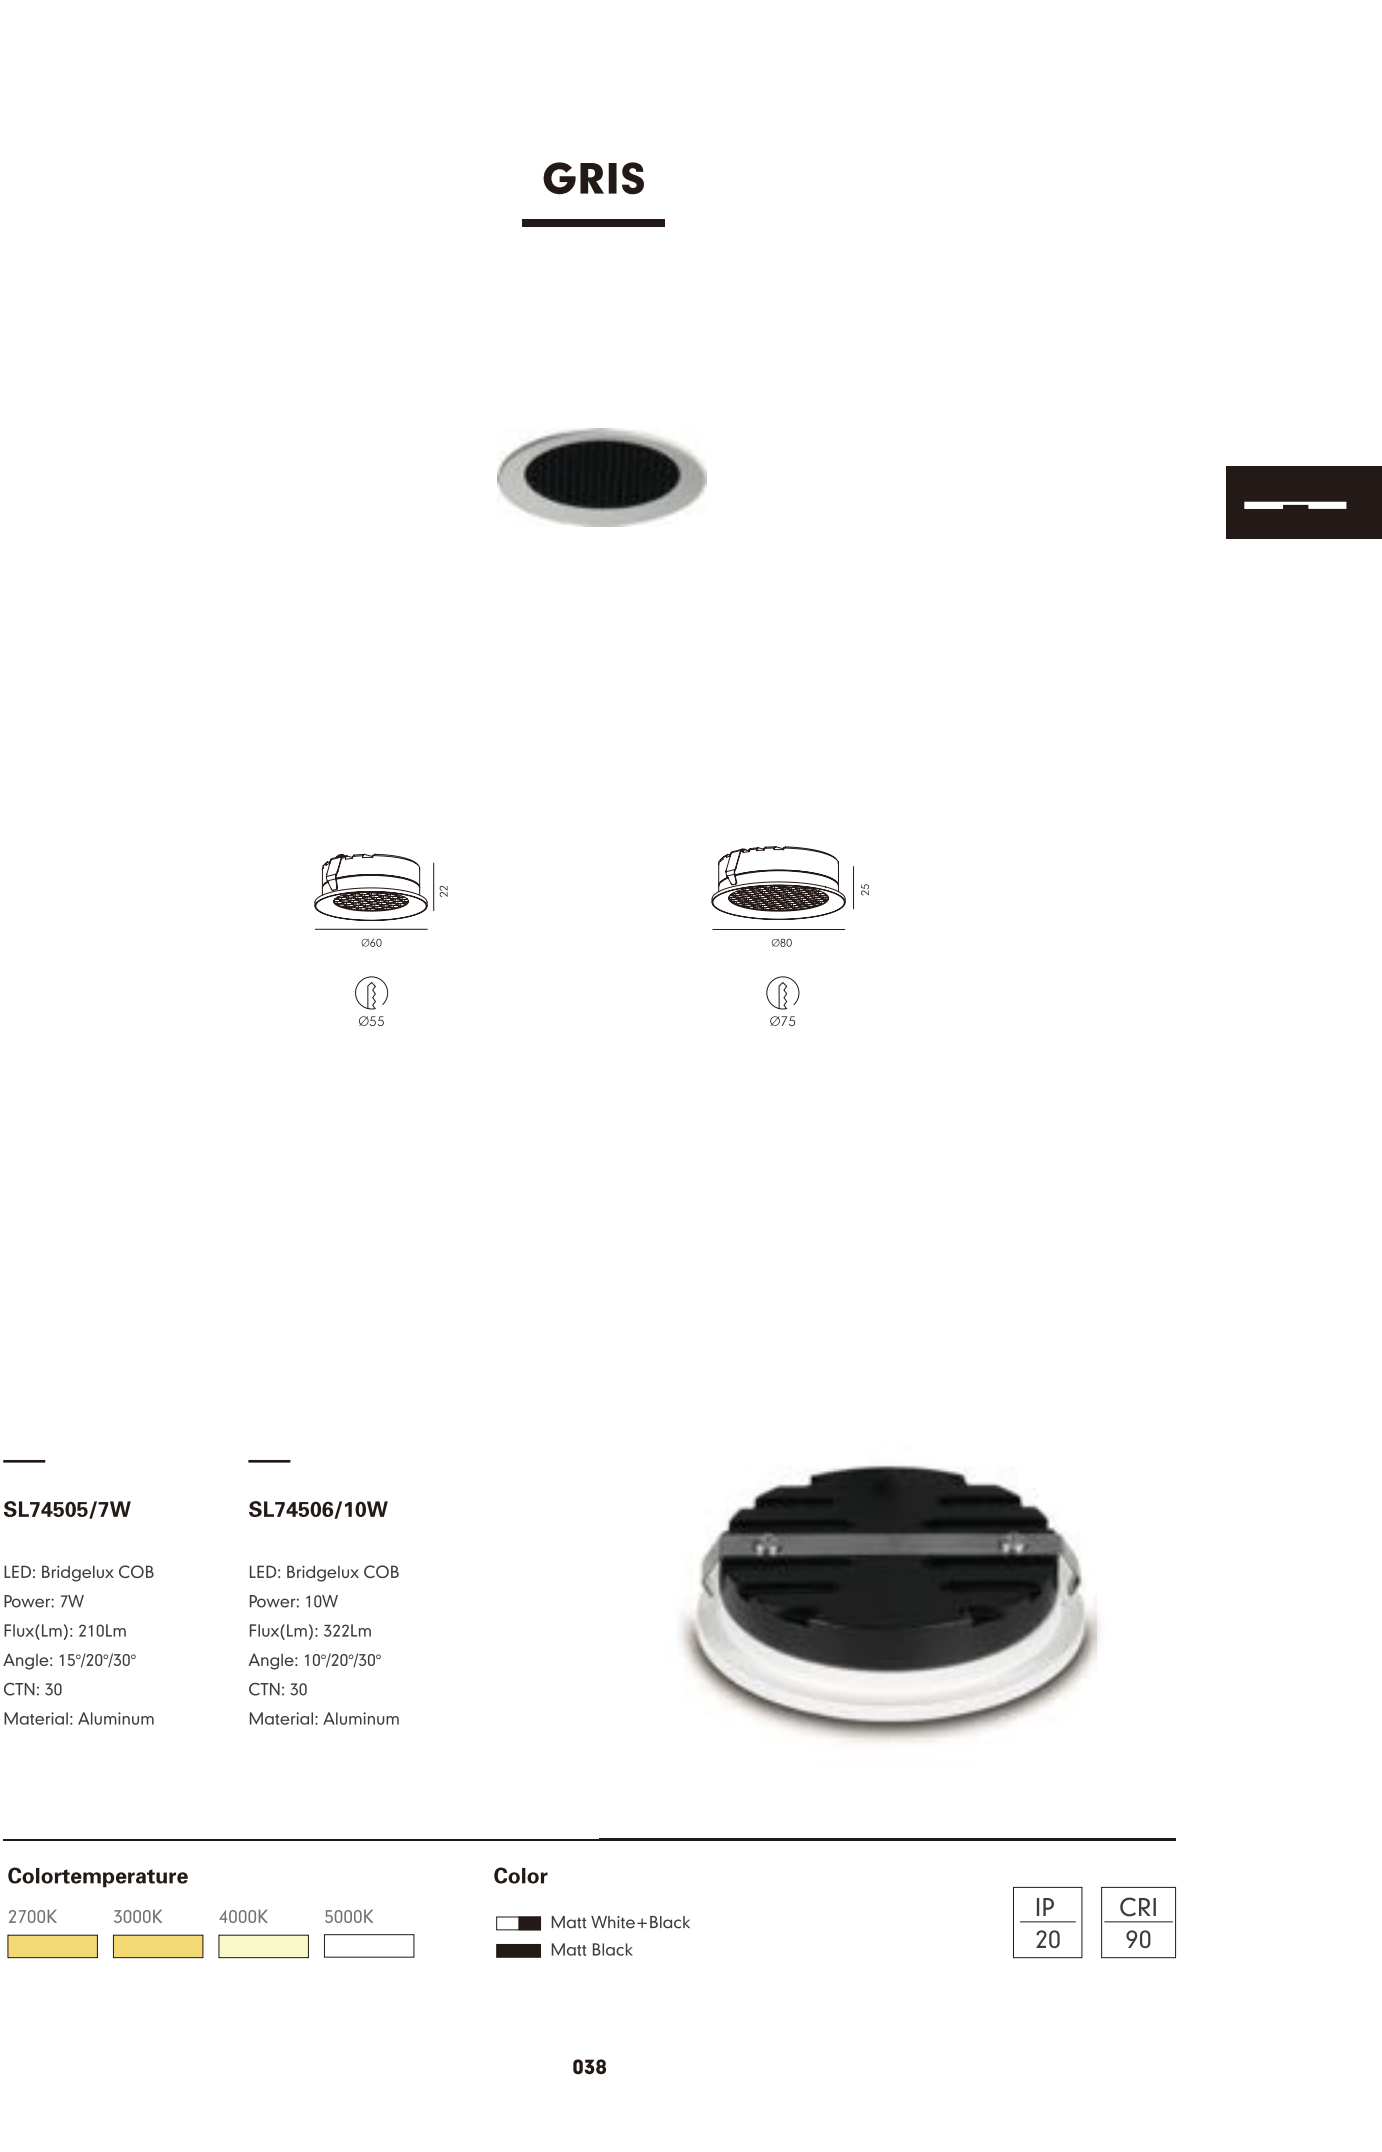

GRIS



SL74505/7W


LED: Bridgelux COB
Power: 7W
Flux(Lm): 210Lm
Angle: 15°/20°/30°
CTN: 30
Material: Aluminum

SL74506/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 322Lm
Angle: 10°/20°/30°
CTN: 30
Material: Aluminum



Colortemperature






Color



IP
20

CRI
90

GRIS



GL7131-1/1 x 7W

LED: Bridgelux COB
Power: 1x7W
Flux(Lm): 210Lm
Angle: 15°/20°/30°
CTN: 30
Material: Aluminum

GL7131-2/2 x 7W

LED: Bridgelux COB
Power: 2x7W
Flux(Lm): 454Lm
Angle: 15°/20°/30°
CTN: 20
Material: Aluminum

GL7131-3/3 x 7W

LED: Bridgelux COB
Power: 3x7W
Flux(Lm): 660Lm
Angle: 15°/20°/30°
CTN: 12
Material: Aluminum

Colortemperature





Color

☐ Sand White+Black



GRIS



SLC78080/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 210Lm
Angle: 15°/20°/30°
CTN: 30
Material: Aluminum

SLC78081/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 322Lm
Angle: 10°/20°/30°
CTN: 30
Material: Aluminum

Colortemperature



Color


☐ Matt White+Black
☐ Matt Black



GRIS




GRIS



GRIS




GRIS




SL74090-1/1 x 10W

LED: Bridgelux COB
Power: 1x10W
Flux(Lm): 612Lm
Angle: 24°/20°/35°
CTN: 30
Material: Aluminum




SL74090-2/2 x 10W

LED: Bridgelux COB
Power: 2x10W
Flux(Lm): 1143Lm
Angle: 24°/20°/35°
CTN: 12
Material: Aluminum



SL74092-1/1 x 10W

LED: Bridgelux COB
Power: 1x10W
Flux(Lm): 612Lm
Angle: 24°/20°/35°
CTN: 30
Material: Iron+Aluminum



SL74092-2/2 x 10W

LED: Bridgelux COB
Power: 2x10W
Flux(Lm): 1143Lm
Angle: 24°/20°/35°
CTN: 18
Material: Iron+Aluminum

Colortemperature




Color





THUN

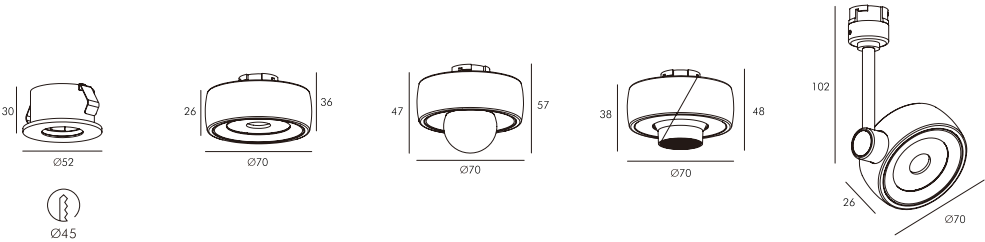

SL74378

Power: 7W
Input:AC220V
Output:DC36V 150mA
CTN: 30
Material: Aluminum

SL74378-MZ01/7W

LED: Luminus COB
Power: 7W
Input:DC36V 150mA
Flux(Lm): 460Lm
Angle: 24°/35°
CTN: 30
Material: Aluminum

SL74378-MZ02/7W

LED: Luminus COB
Power: 7W
Input:DC36V 150mA
Flux(Lm): 336Lm
Angle: 24°/35°
CTN: 30
Material: Aluminum

SL74378-MZ03/7W

LED: Luminus COB
Power: 7W
Input:DC36V 150mA
Flux(Lm): 425Lm
Angle: 24°/35°
CTN: 30
Material: Aluminum

SL74378-MZ04/7W

LED: Luminus COB
Power: 7W
Input:DC36V 150mA
Flux(Lm): 485Lm
Angle: 24°/35°
CTN: 30
Material: Aluminum

Colortemperature



Color (SL74378)



Color (SL74378-MZ01/02/03/04)



THUN



THUN



SLC78105

Power: 9W
Input:AC220V
Output:DC36V 200mA
CTN: 30
Material: Aluminum

SLC78105-MZ01/9W

LED: Luminus COB
Power: 9W
Input:DC36V 200mA
Flux(Lm): 558Lm
Angle: 24°/35°
CTN: 30
Material: Aluminum

SLC78105-MZ02/9W

LED: Luminus COB
Power: 9W
Input:DC36V 200mA
Flux(Lm): 382Lm
Angle: 35°
CTN: 30
Material: Aluminum

SLC78105-MZ03/9W

LED: Luminus COB
Power: 9W
Input:DC36V 200mA
Flux(Lm): 565Lm
Angle: 24°/35°
CTN: 30
Material: Aluminum

Colortemperature



Color (SL78105)

□ Sand white




Color (SL78105-MZ01/02/03)

□ Sand White+Black


IP
20

CRI
90

THUN



SL74135-MZ01



SL74135-MZ03



SL74135-MZ05



SL74135-MZ06

SL74135 Base



Power: 15W
Output:DC24V
CTN: 30
Material: Aluminum+PC

Color
Sand White

IP
20

DC
24V

THUN



SL74135-MZ01/10W

LED: LatticePower SMD
Power: 10W
Input:DC24V
Flux(Lm): 683Lm
Angle: 24°/35°
CTN: 30
Material: Aluminum

SL74135-MZ05/7W

LED: LatticePower SMD
Power: 7W
Input:DC24V
Flux(Lm):
Angle:
CTN: 30
Material: Aluminum

Colortemperature

2700K 3000K 4000K 5000K

Color (SL74135-MZ02)

Sand White+Black

Color (SL74135-MZ03)

Sand white


IP
20

CRI
90

DC
24V



THUN

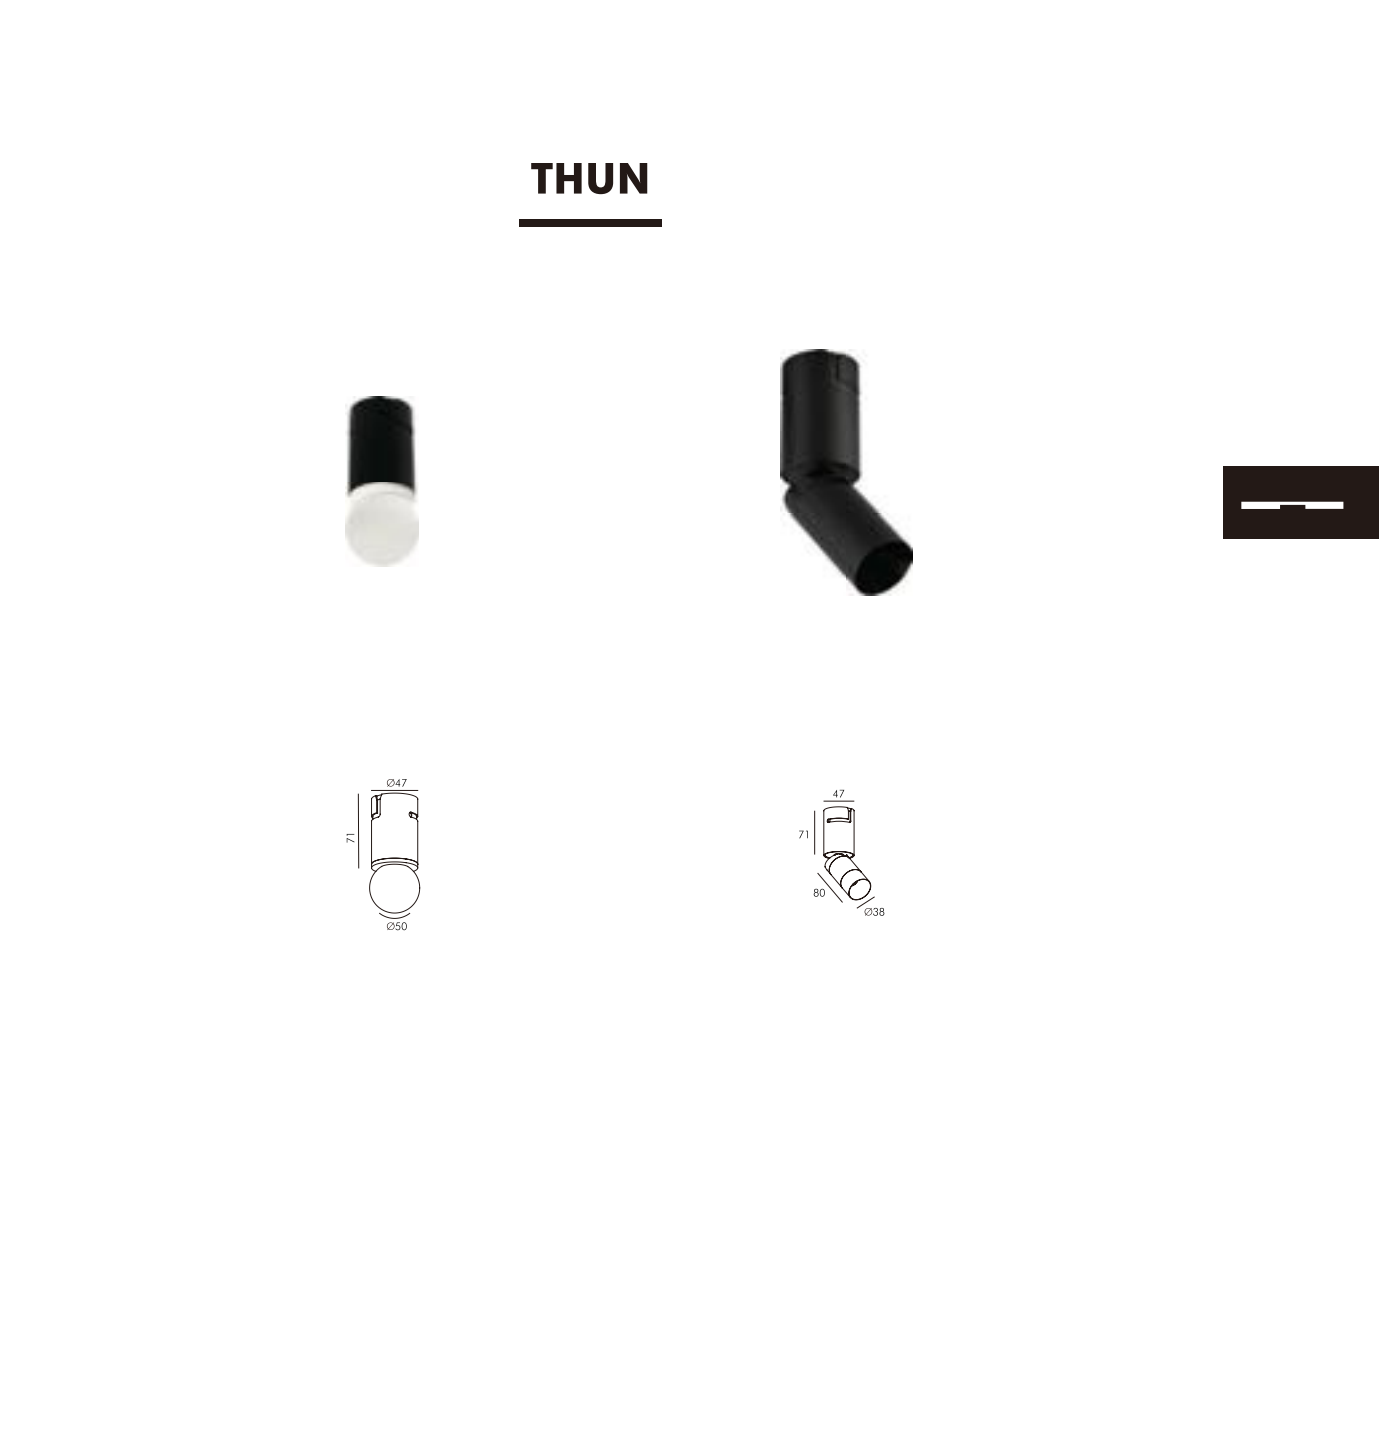

THUN

SL74135-MZ03/7W

LED: LatticePower SMD
Power: 7W
Input:DC24V
Flux(Lm): 405Lm
Angle: 35°
CTN: 30
Material: Aluminum

SL74135-MZ06/7W

LED: LatticePower SMD
Power: 7W
Input:DC24V
Flux(Lm):
Angle:
CTN: 30
Material: Aluminum


Colortemperature






Color



IP	CRI	DC
20	90	24V

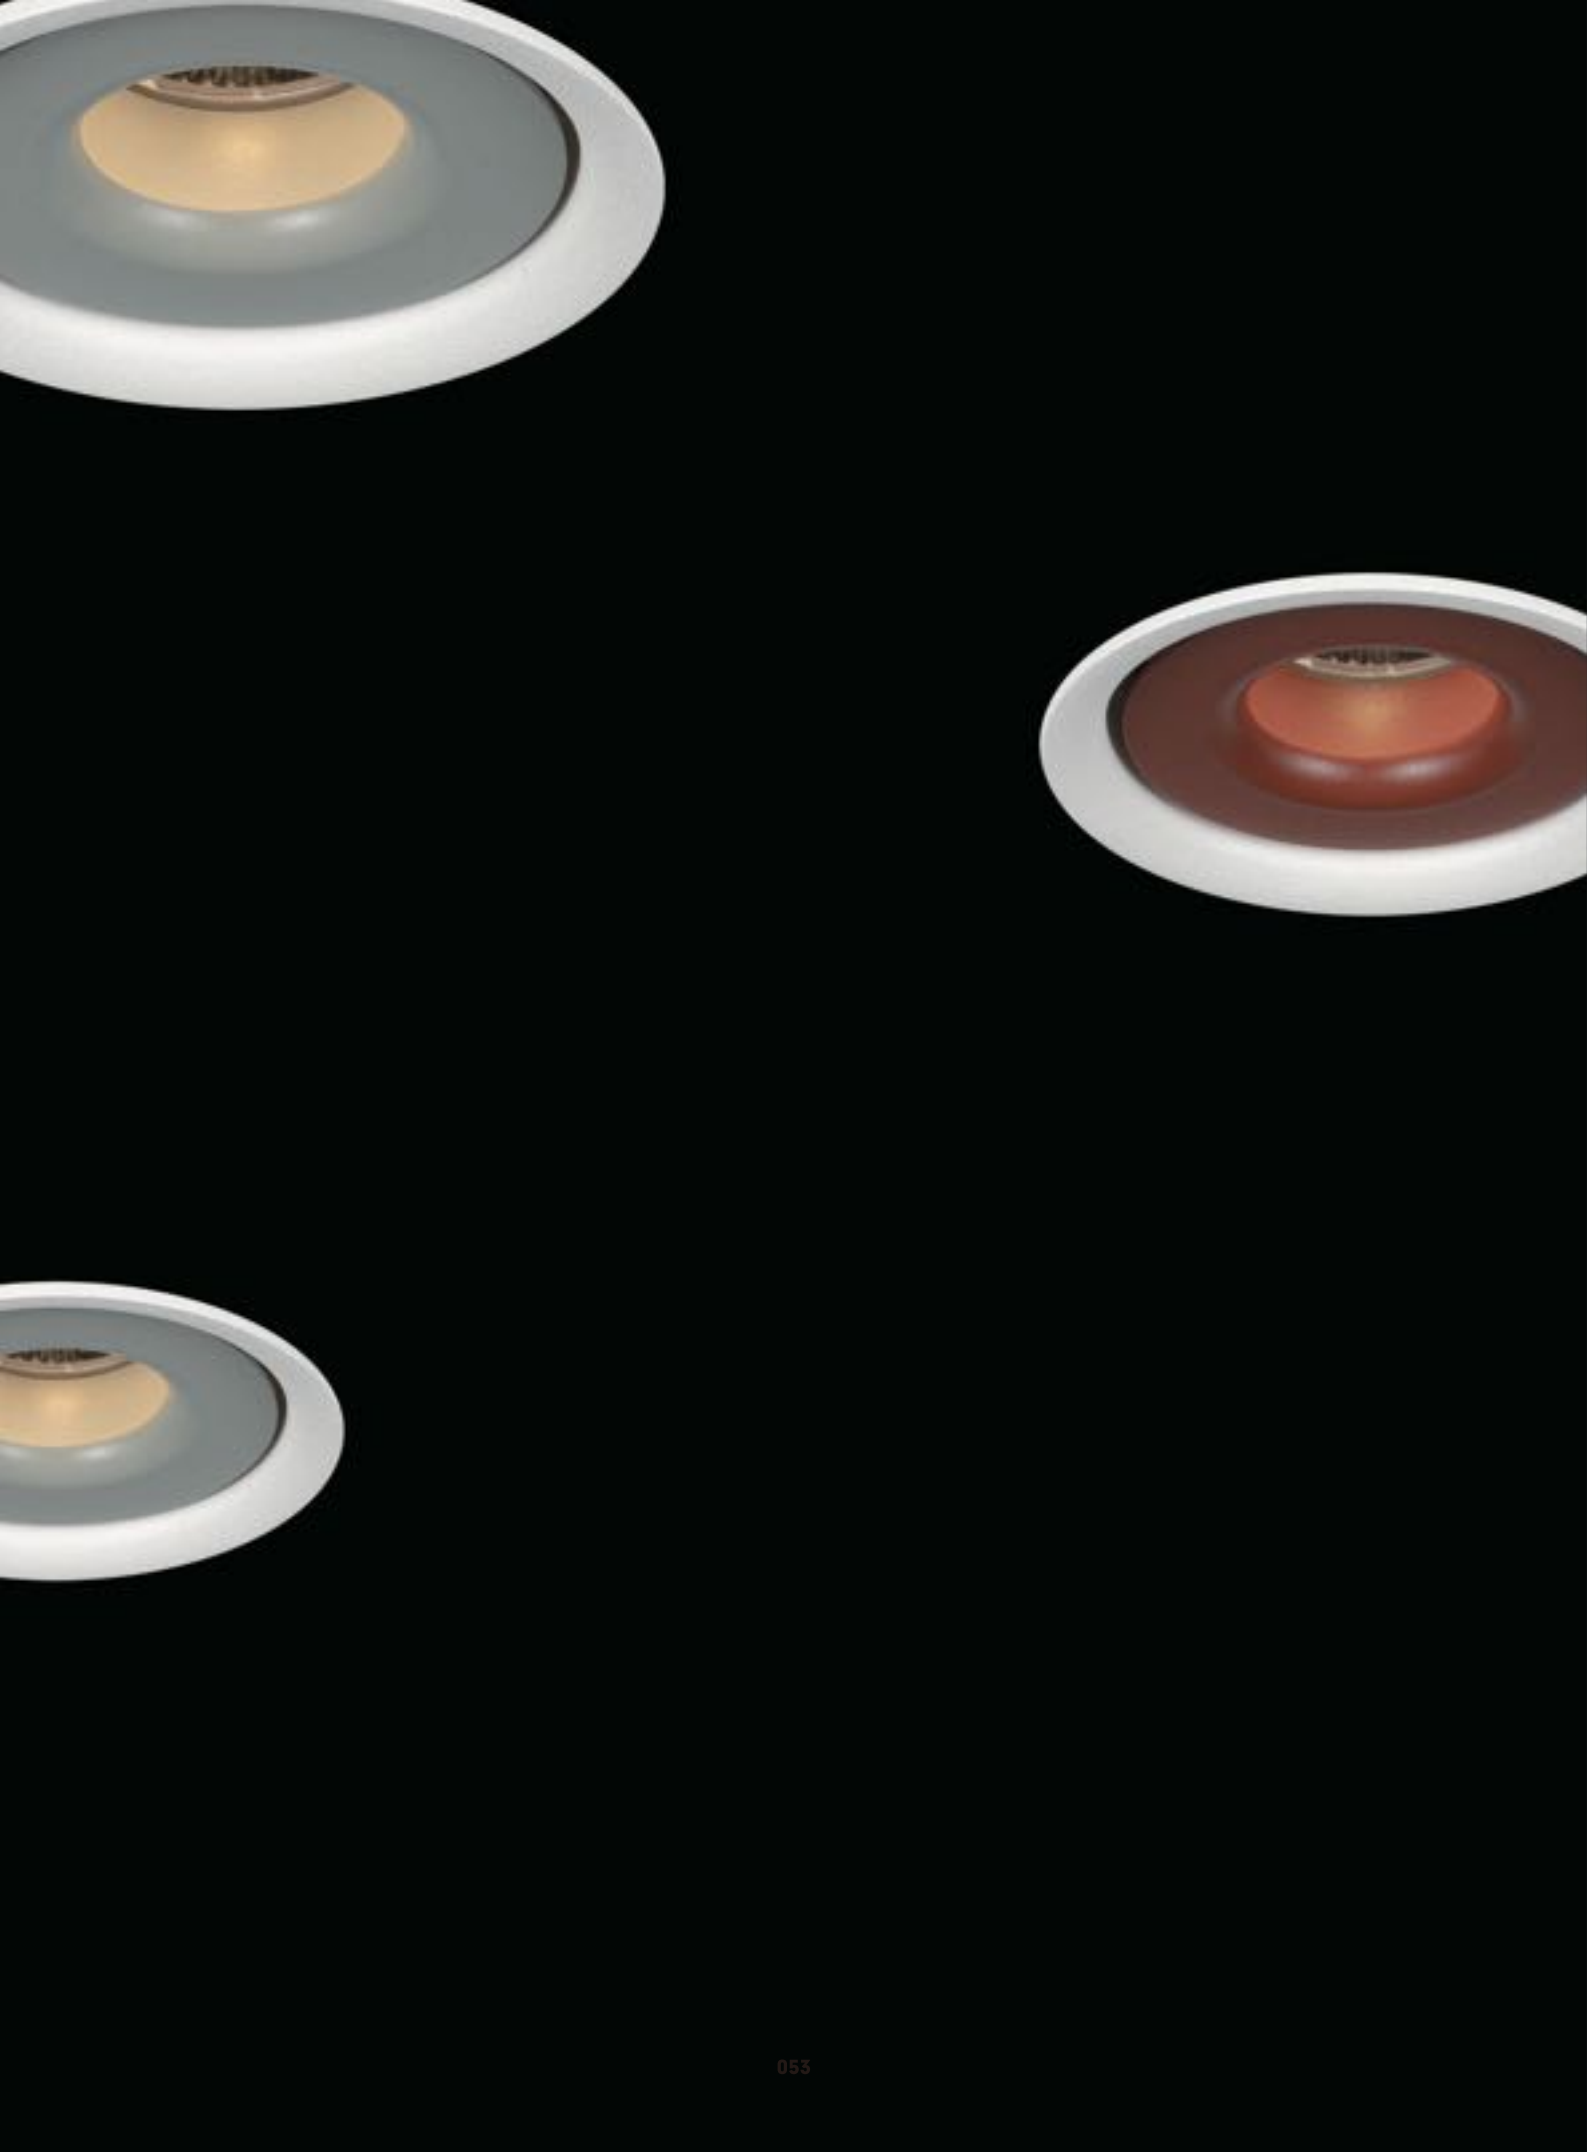

SIENA



SL74546-2.5/7W

LED: Luminus COB
Power: 7W
Flux(Lm): 478Lm
Angle: 24°/30°/40°
CTN: 50
Material: Aluminum

SL74546-3/12W

LED: Luminus COB
Power: 12W
Flux(Lm): 970Lm
Angle: 15°/24°/36°
CTN: 30
Material: Aluminum

SL74546-3.5/18W

LED: Luminus COB
Power: 18W
Flux(Lm): 1375Lm
Angle: 15°/20°/36°
CTN: 30
Material: Aluminum

Colortemperature




Color





SIENA



SLC78138/6W

LED: DOB
Power: 6W
Flux(Lm): 525Lm
Angle: 20°/30°
CTN: 30
Material: Aluminum


SLC78139/12W

LED: DOB
Power: 12W
Flux(Lm): 526Lm
Angle: 30°
CTN: 30
Material: Aluminum

SLC78140/20W


LED: DOB
Power: 20W
Flux(Lm): 1252Lm
Angle: 24°/30°
CTN: 30
Material: Aluminum

Colortemperature




Color



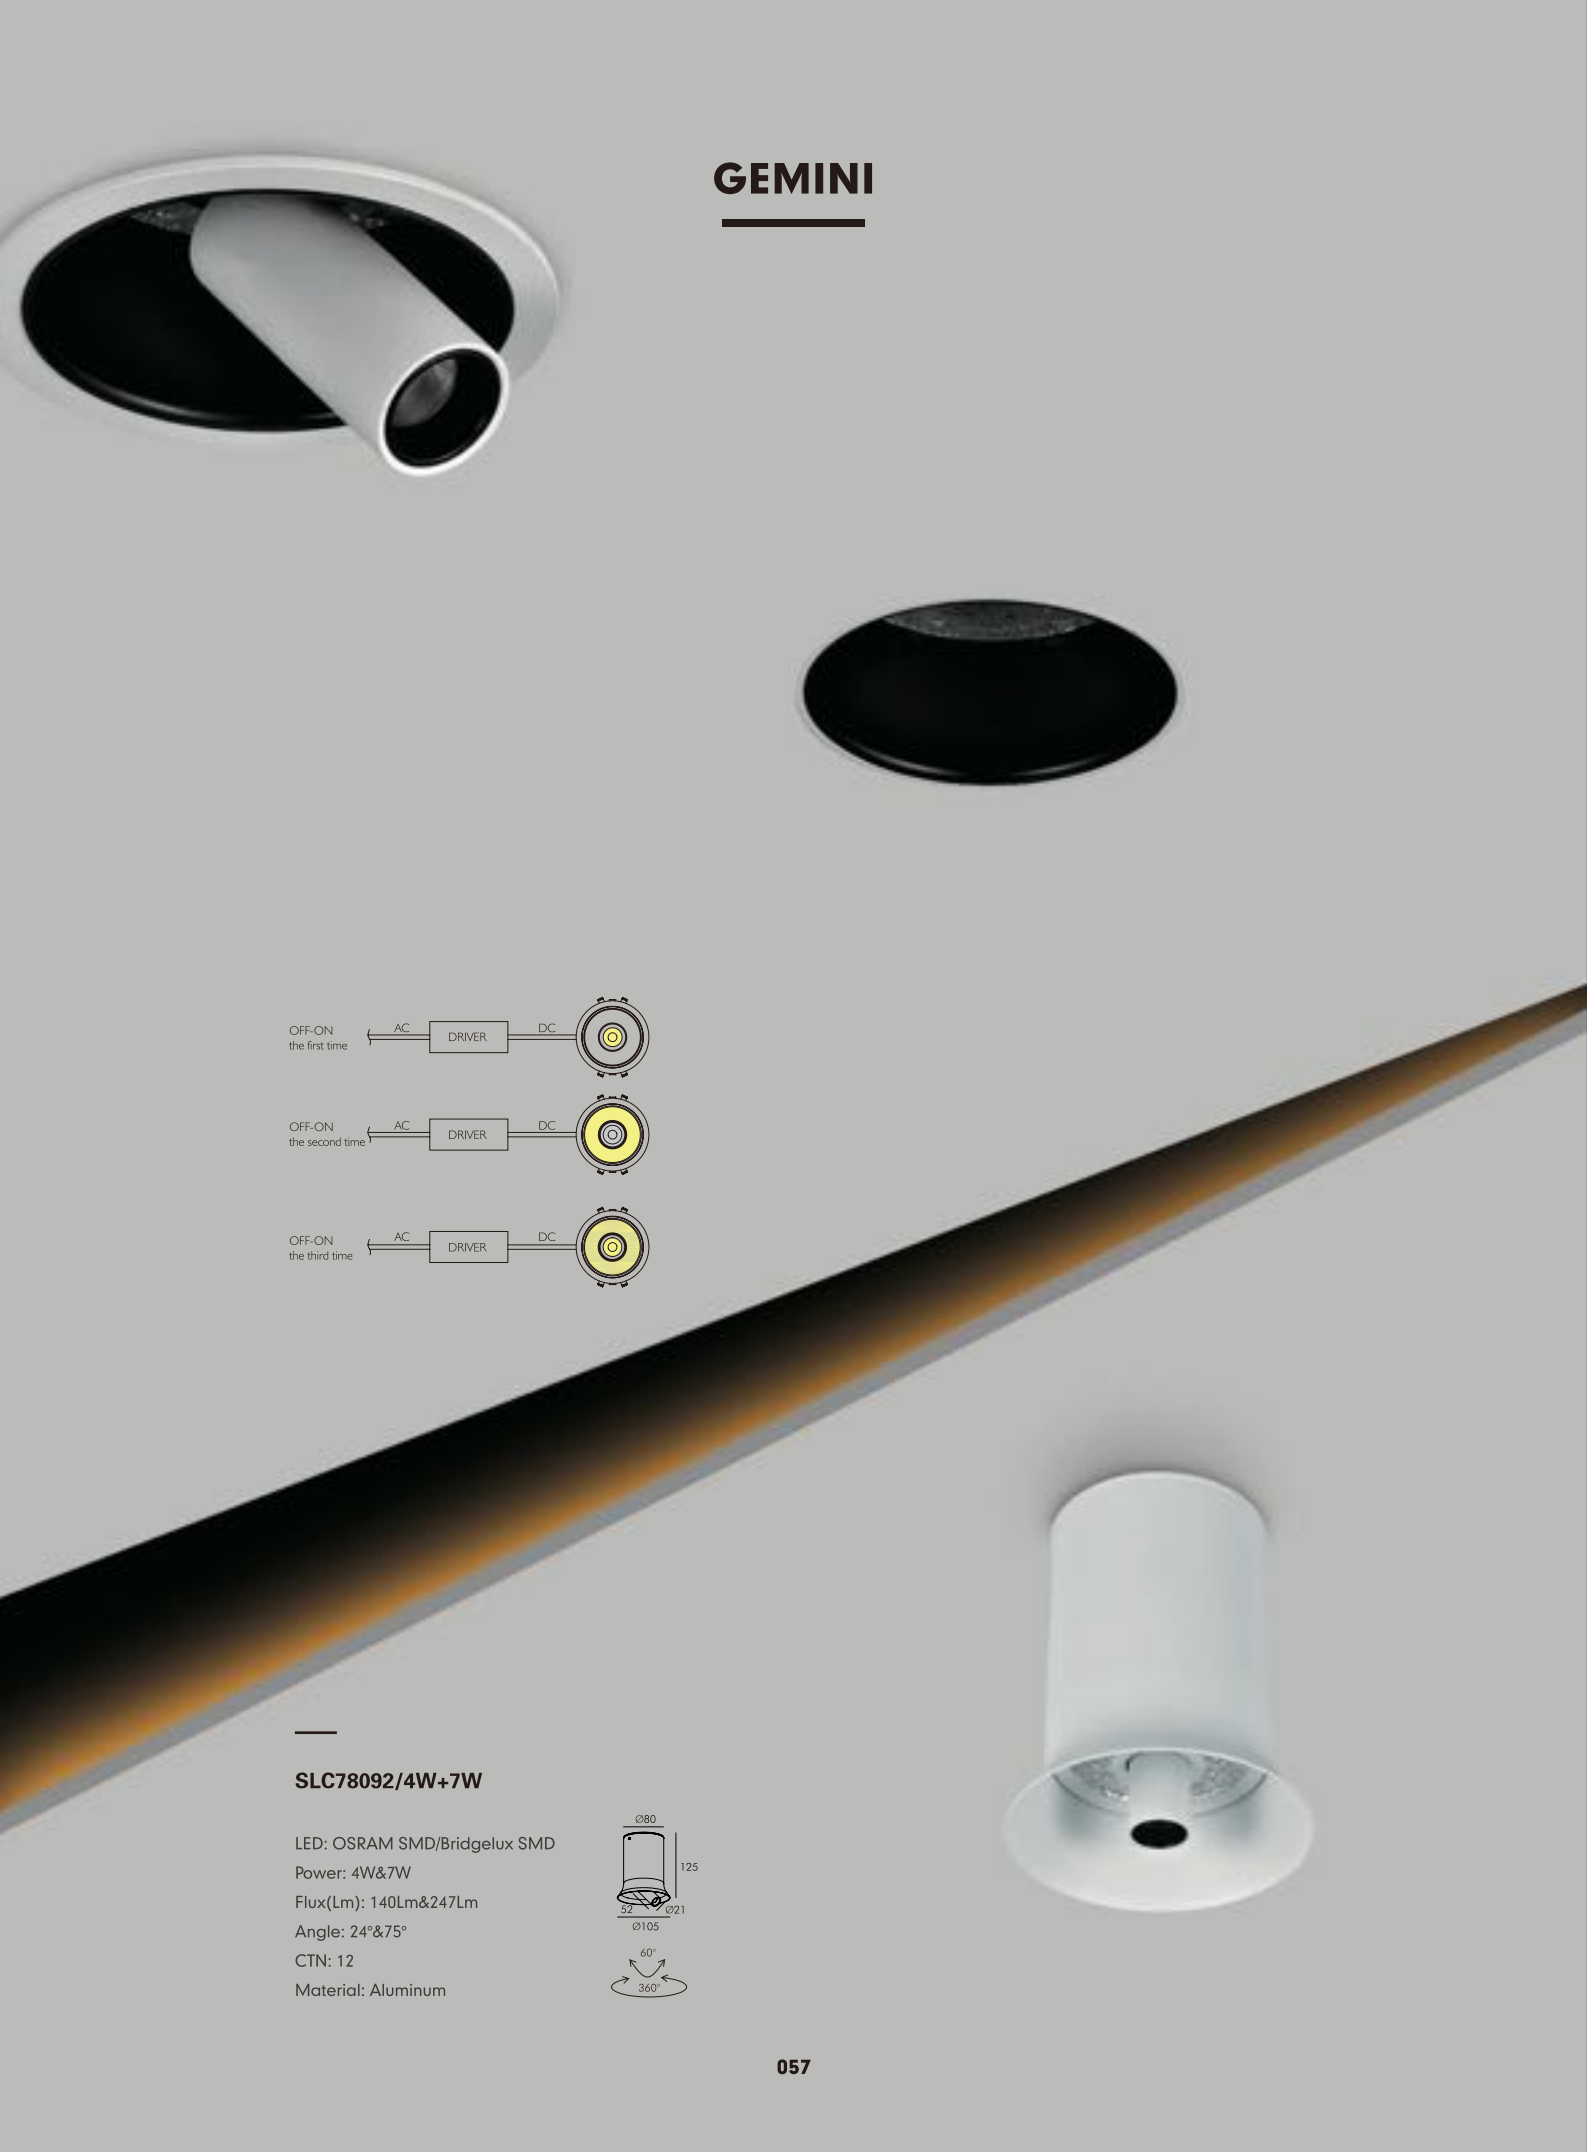


GEMINI

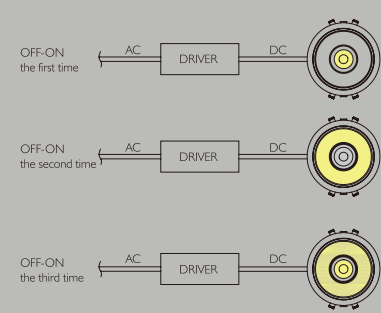


SLC78092/4W+7W

LED: OSRAM SMD/Bridgelux SMD
Power: 4W&7W
Flux(Lm): 140Lm&247Lm
Angle: 24°&75°
CTN: 12
Material: Aluminum




GEMINI




SL74344/12W

LED: Bridgelux COB/Bridgelux SMD
Power: 12W&12W
Flux(Lm): COB 656Lm/SMD 195Lm
Angle: 18°/24°36°&48°
CTN: 30
Material: Aluminum




SL74346/12W

LED: Bridgelux COB/Bridgelux SMD
Power: 12W&12W
Flux(Lm): COB 656Lm/SMD 195Lm
Angle: 18°/24°36°&48°
CTN: 20
Material: Aluminum

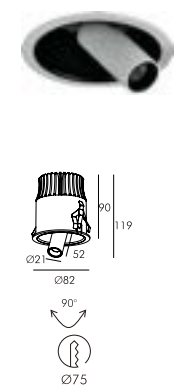

SL74345/12W ~ 5W


LED: LatticePower SMD/Bridgelux SMD
Power: 12W&5W
Flux(Lm): 12W 170lm/5W 187Lm
Angle: 24°/33°&43°
CTN: 30
Material: Aluminum

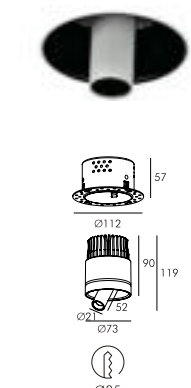

SL74347/12W ~ 5W

LED: LatticePower SMD/Bridgelux SMD
Power: 12W&5W
Flux(Lm): 12W 170lm/5W 187Lm
Angle: 24°/33°&43°
CTN: 20
Material: Aluminum

Colortemperature




Color

■ Sand White+Black

IP
20

CRI
90

GEMINI

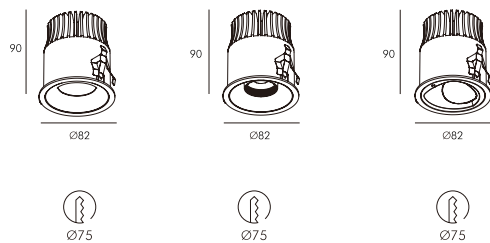

SL74603/20W

LED: Bridgelux COB
Power: 20W
Flux(Lm):
Angle:
CTN: 30
Material: Aluminum


SL74605/20W

LED: Bridgelux COB
Power: 20W
Flux(Lm):
Angle:
CTN: 30
Material: Aluminum

SL74607/20W

LED: Bridgelux COB
Power: 20W
Flux(Lm):
Angle:
CTN: 30
Material: Aluminum

Colortemperature




Color

☐ Matt White+Black

IP
20

CRI
90

GEMINI

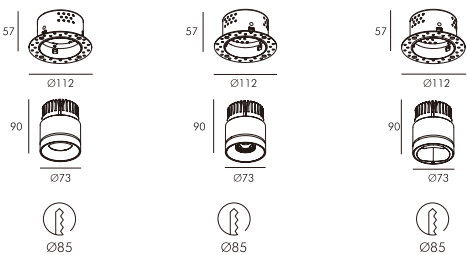

SL74604/20W

LED: Bridgelux COB
Power: 20W
Flux(Lm):
Angle:
CTN: 20
Material: Aluminum


SL74606/20W

LED: Bridgelux COB
Power: 20W
Flux(Lm):
Angle:
CTN: 20
Material: Aluminum

SL74608/20W

LED: Bridgelux COB
Power: 20W
Flux(Lm):
Angle:
CTN: 20
Material: Aluminum

Colortemperature



Color


☐ Matt White+Black

IP
20

CRI
90

FANO

COLOR

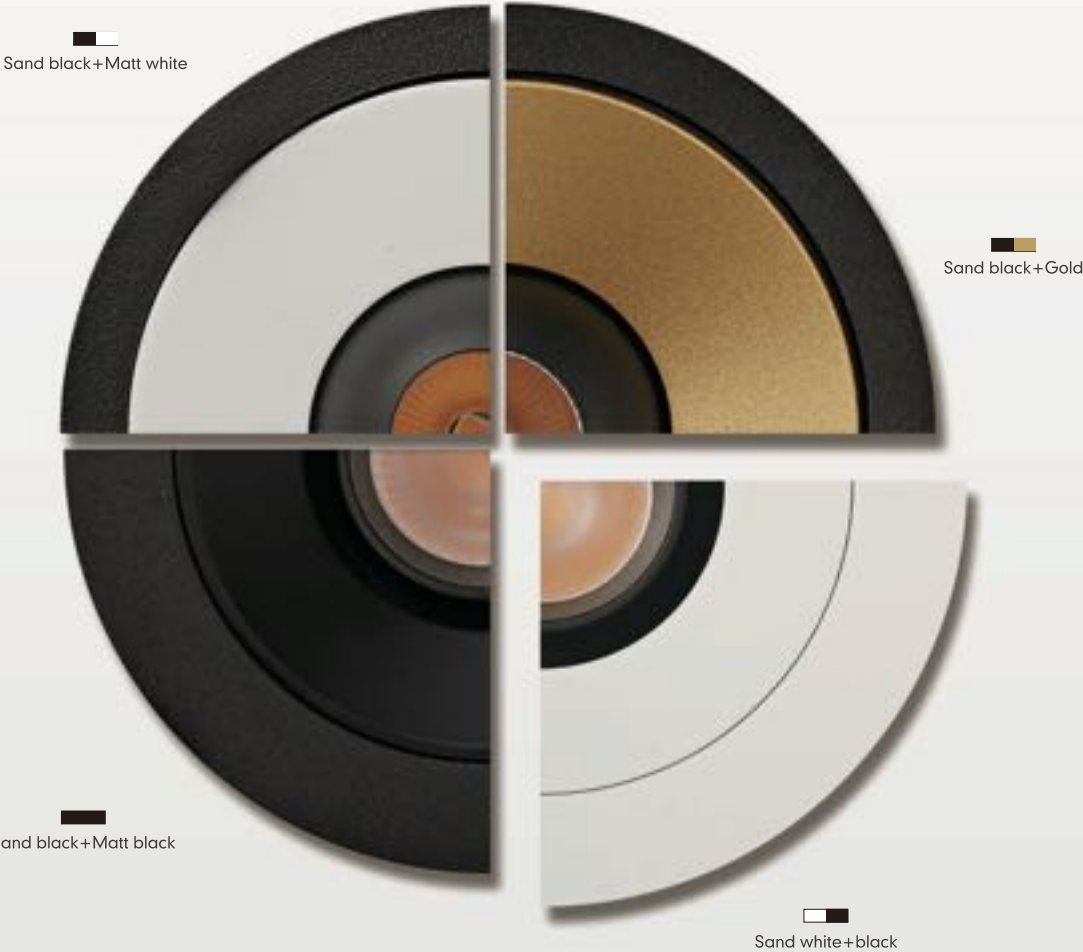

FANO

TRIMLESS



A super smooth finish combines ultimate minimalism with maximum eye comfort. This version comes with a trimless mounting kit enabling quick and precise installation and finishing.



TRIM

The most basic luminaries type suitable for most kind of lighting project.

FANO



SL74170/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 377Lm
Angle: 30°/38°
CTN: 30
Material: Aluminum



SL74172/15W

LED: Bridgelux COB
Power: 15W
Flux(Lm): 835Lm
Angle: 24°/35°
CTN: 20
Material: Aluminum



Colortemperature



Color



FANO




SL74171/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 377Lm
Angle: 30°/38°
CTN: 30
Material: Aluminum



SL74173/15W



LED: Bridgelux COB
Power: 15W
Flux(Lm): 835Lm
Angle: 24°/35°
CTN: 20
Material: Aluminum

Colortemperature



Color



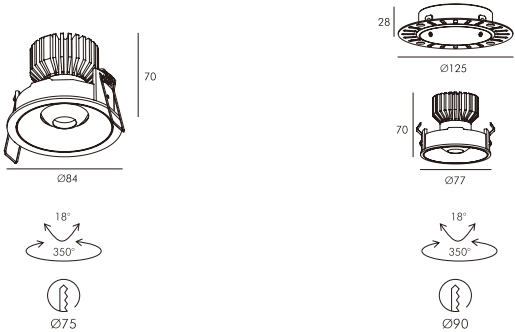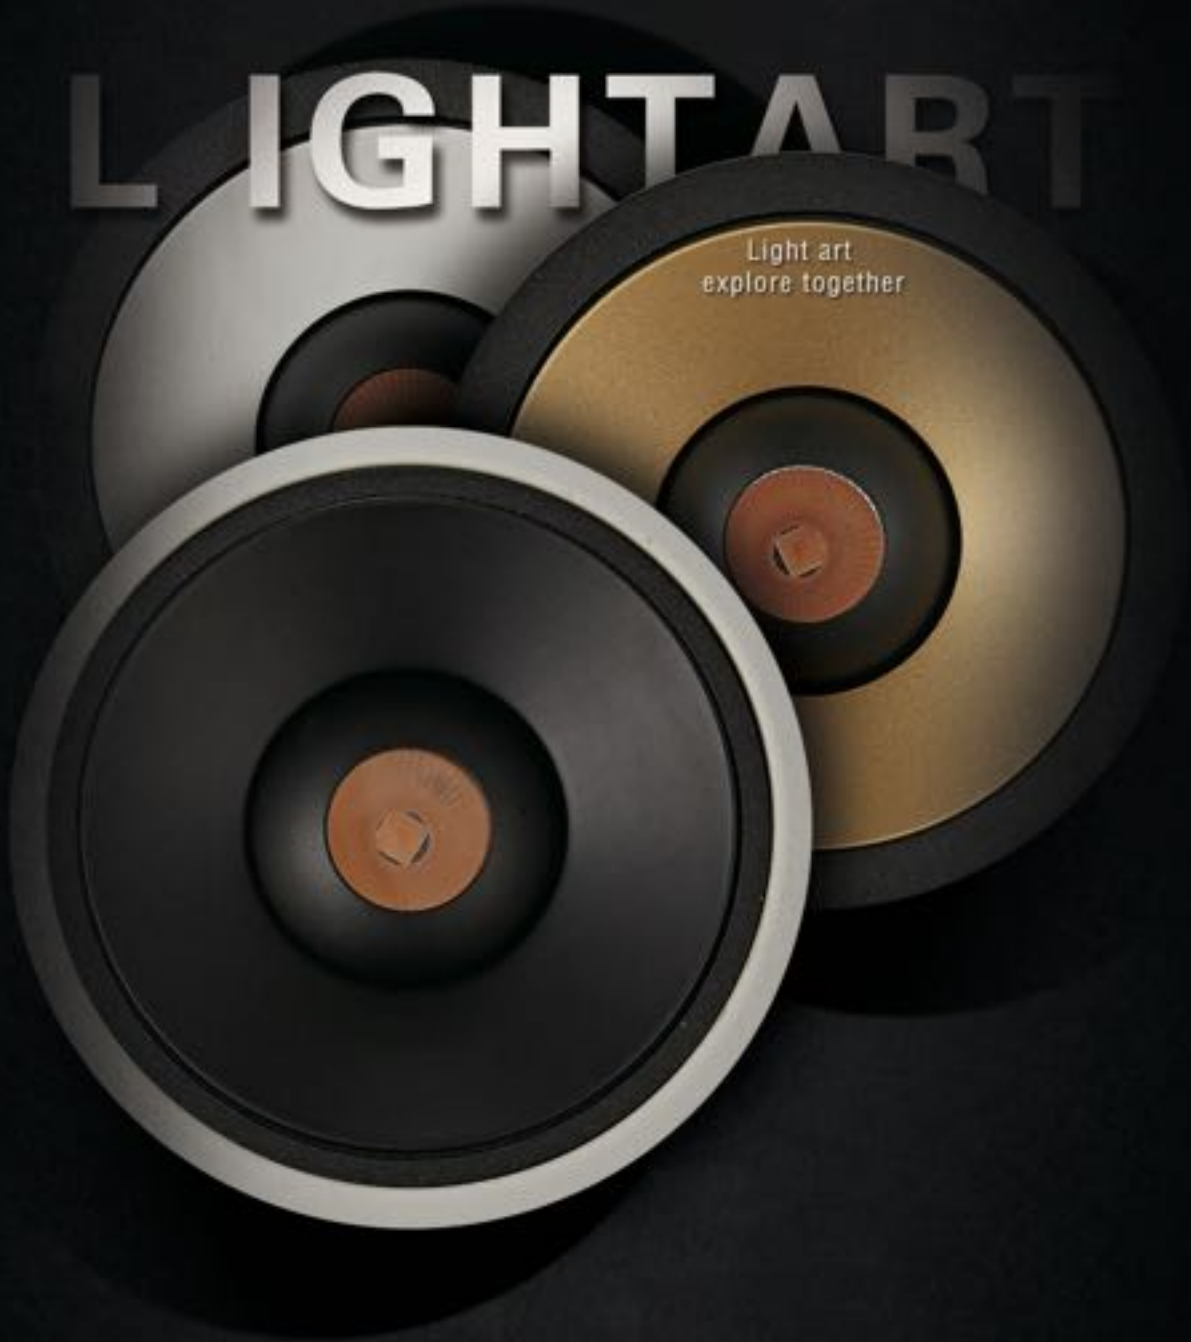

SL74174/7W

LED: Bridgelux SMD
Power: 7W
Flux(Lm): 385Lm
Angle: 20°/35°
CTN: 30
Material: Aluminum

SL74175/7W

LED: Bridgelux SMD
Power: 7W
Flux(Lm): 385Lm
Angle: 20°/35°
CTN: 30
Material: Aluminum

Colortemperature




Color



MODICA

MODICA

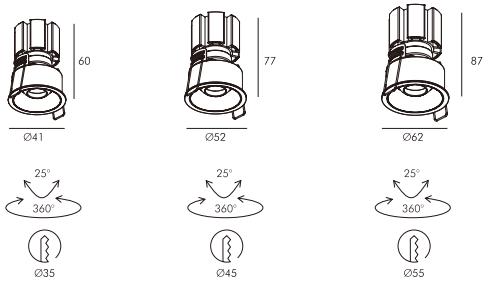

SL74600/5W

LED: Luminus SMD
Power: 5W
Flux(Lm): 218Lm
Angle: 24°/36°
CTN: 50
Material: Aluminum

SL74601/9W

LED: CREE COB
Power: 9W
Flux(Lm): 453Lm
Angle: 24°/36°
CTN: 50
Material: Aluminum

SL74602/12W

LED: CREE COB
Power: 12W
Flux(Lm): 727
Angle: 24°/36°
CTN: 50
Material: Aluminum

Colortemperature






Color

■ Matt White+Black

IP	CRI
20	95

MODICA

MODICA



Ø60

Ø62

Ø72

Ø55

Ø65

SL74371/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 340Lm
Angle: 24°/36°/50°
CTN: 30
Material: Aluminum

SL74387/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 482Lm
Angle: 24°/36°/50°
CTN: 30
Material: Aluminum

SLC78103/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 340Lm
Angle: 24°/36°/50°
CTN: 30
Material: Aluminum

Colortemperature



Color




069

070

COMO




COMO




SL74075/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 375Lm
Angle: 24°/15°/35°
CTN: 50
Material: Aluminum



SL74084/10W


LED: Bridgelux COB
Power: 10W
Flux(Lm): 450Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum



SL74085/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 450Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

Colortemperature



Color



ROME




ROME




SL74132/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 415Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum




SL74070-A/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 855Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum



SL74133/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 420Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum



SL74071-A/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 860Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

Colortemperature



Color




COLORFUL



Feel the
SUNSHINE
and enjoy the future.

COLORFUL

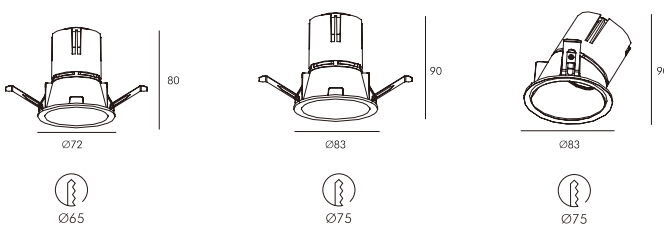

SL74143/7W


LED: Bridgelux COB
Power: 7W
Flux(Lm): 428Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

SL74136/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 750Lm
Angle: 24°/15°/50°
CTN: 30
Material: Aluminum

SL74137/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 740Lm
Angle: 24°/15°/50°
CTN: 30
Material: Aluminum

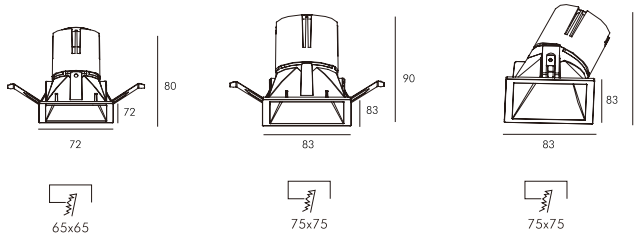

SL74144/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 428Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

SL74138/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 772Lm
Angle: 24°/15°/50°
CTN: 30
Material: Aluminum


SL74139/10W


LED: Bridgelux COB
Power: 10W
Flux(Lm): 723Lm
Angle: 24°/15°/50°
CTN: 30
Material: Aluminum

Colortemperature






Color



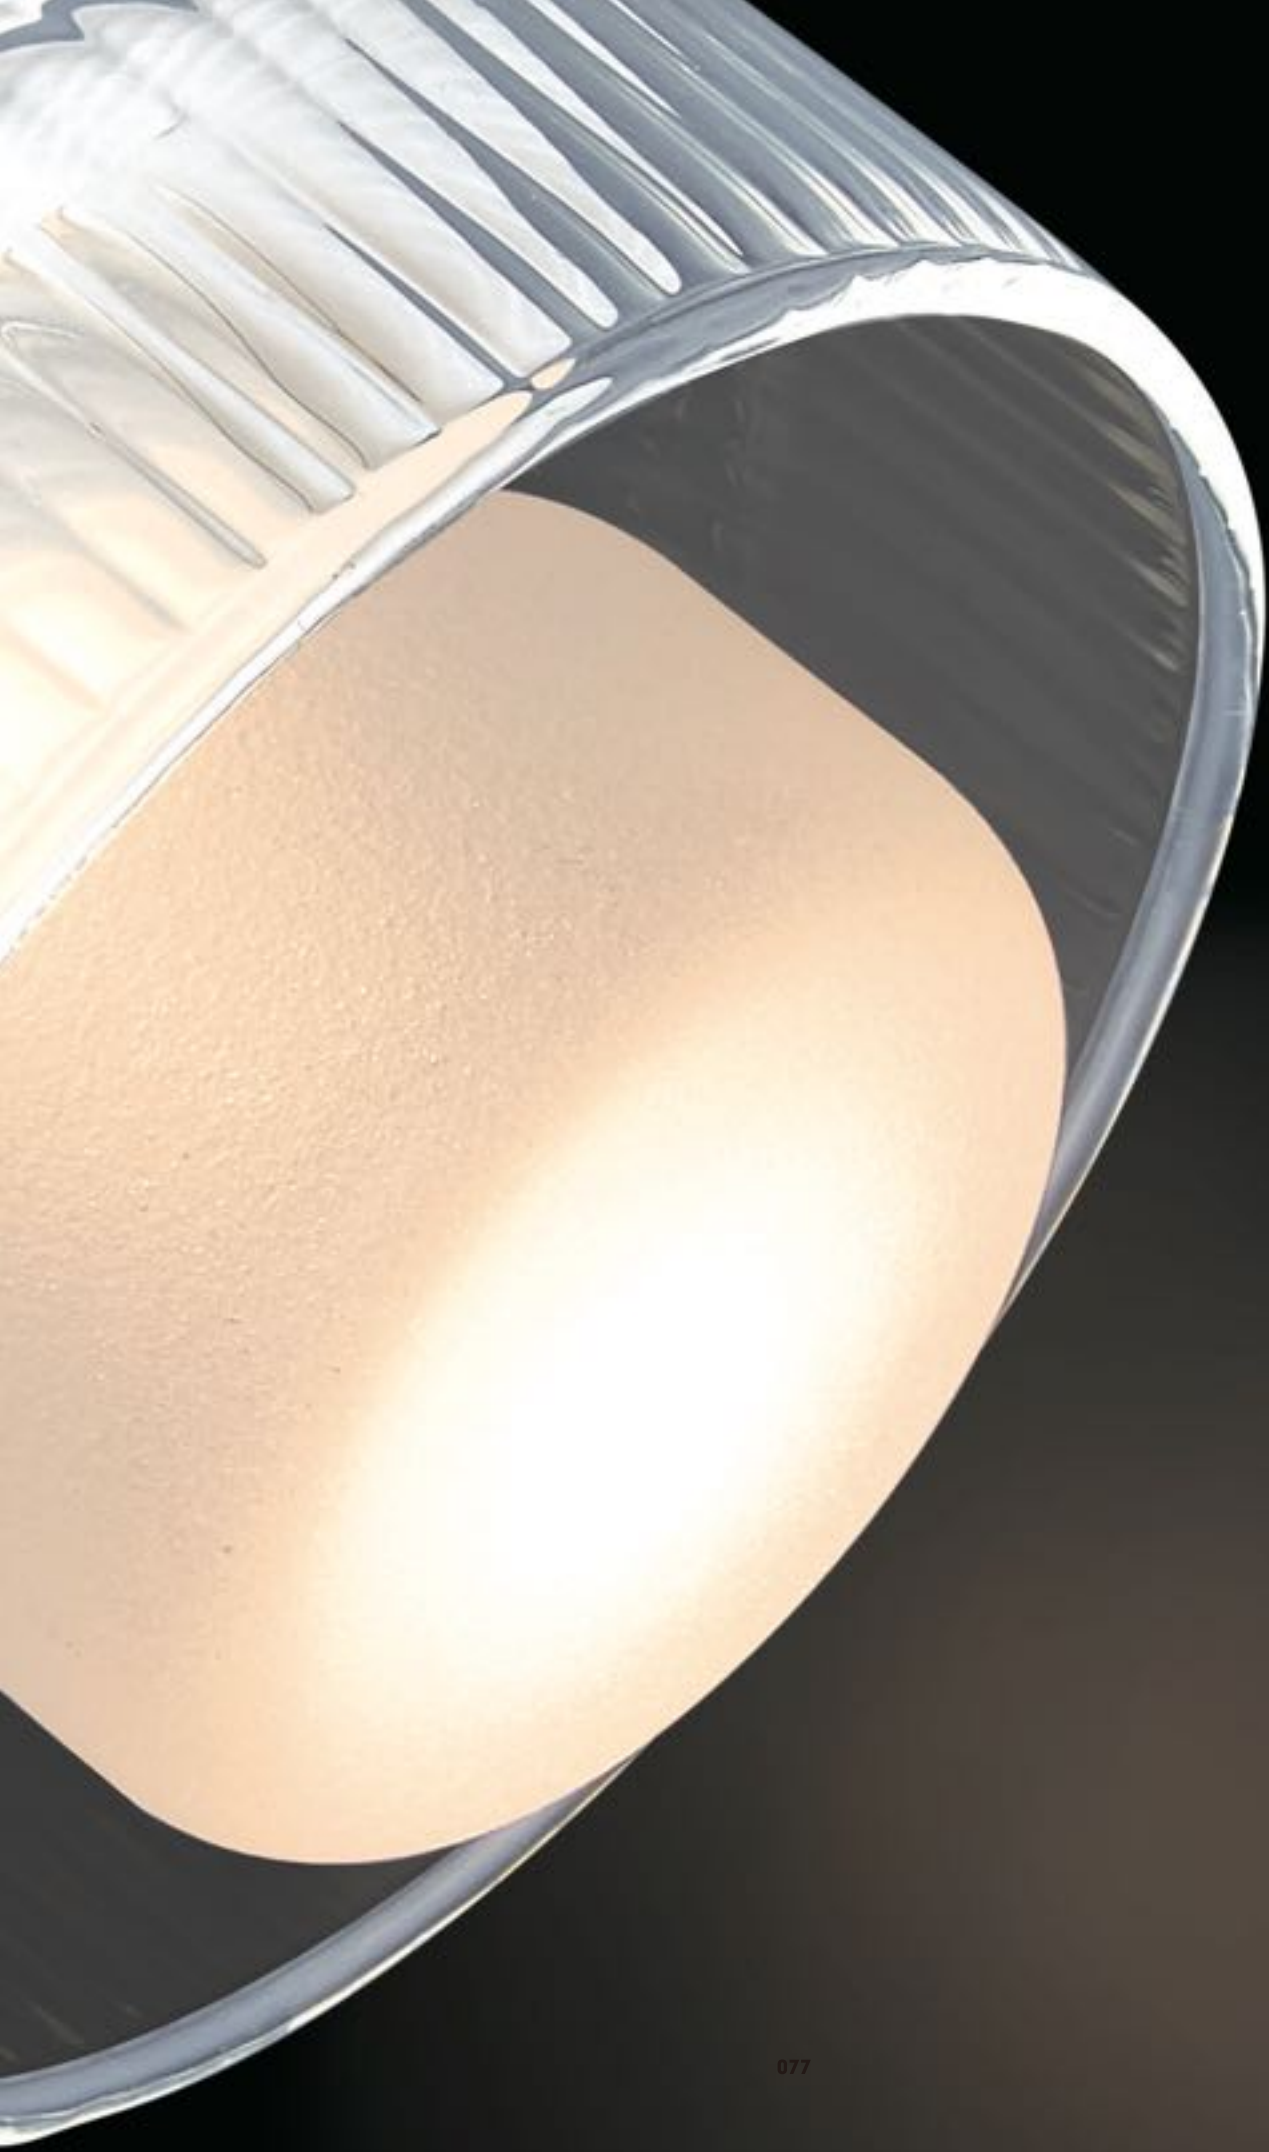

COLLIE



SL74526/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 293Lm
Angle: 35°
CTN: 30
Material: Aluminum

SL74527/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 329Lm
Angle: 35°
CTN: 30
Material: Aluminum

SL74528/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 308Lm
Angle: 35°
CTN: 30
Material: Aluminum



Colortemperature

2700K	3000K	4000K	5000K

Color

Sand White






IP
20

CRI
90

TULLIO



TULLIO



SL74381/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 515Lm
Angle: 18°/24°/36°
CTN: 30
Material: Aluminum

■ Matt White+Black

SL74382/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 515Lm
Angle: 18°/24°/36°
CTN: 30
Material: Aluminum

■ Matt White+Black

SL74383/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 515Lm
Angle: 18°/24°/36°
CTN: 30
Material: Aluminum

■ Matt Black

SL74384/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 595Lm
Angle: 18°/24°/36°
CTN: 30
Material: Aluminum

■ Matt White+Black

SL74385/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 498Lm
Angle: 18°/24°/36°
CTN: 30
Material: Aluminum

■ Matt Black

Colortemperature






IP	CRI
20	90



TULLIO

TULLIO



SL74204/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 377Lm
Angle: 20°/30°
CTN: 30
Material: Aluminum

SL74205/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 487Lm
Angle: 20°/30°
CTN: 30
Material: Aluminum


SL74206/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 463Lm
Angle: 20°/30°
CTN: 30
Material: Aluminum


Colortemperature



Color (SL74204)





Color (SL74205/74206)



TULLIO



TULLIO



SL74207/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 377Lm
Angle: 20°/30°
CTN: 30
Material: Aluminum

SL74208/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 487Lm
Angle: 20°/30°
CTN: 30
Material: Aluminum


SL74209/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 463Lm
Angle: 20°/30°
CTN: 30
Material: Aluminum

Colortemperature



Color (SL74207)




Color (SL74208/74209)



TULLIO



TULLIO

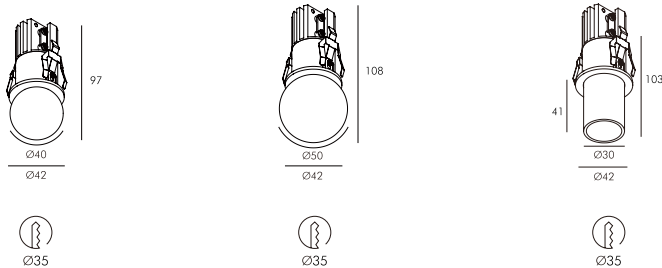

SL74210/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 332Lm
Angle: 35°
CTN: 30
Material: Aluminum


SL74211/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 337Lm
Angle: 35°
CTN: 30
Material: Aluminum

SL74213/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 286Lm
Angle: 24°/30°
CTN: 30
Material: Aluminum+Glass


Colortemperature



Color (SL74210/SL74211)



Color (SL74213)





TULLIO

TULLIO



SL74214/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 332Lm
Angle: 35°
CTN: 30
Material: Iron+Aluminum

SL74215/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 337Lm
Angle: 35°
CTN: 30
Material: Iron+Aluminum

SL74217/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 286Lm
Angle: 24°/30°
CTN: 30
Material: Iron+Aluminum+Glass

Colortemperature



Color (SL74214/SL74215)

Sand White

Color (SL74217)

Sand White+Amber
Sand White+Smokey gray



TULLIO




TULLIO





SL74218/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 399Lm
Angle: 20°/30°
CTN: 30
Material: Aluminum




SL74219/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 399Lm
Angle: 20°/30°
CTN: 30
Material: Iron+Aluminum




SL74220/2 x 7W

LED: Bridgelux COB
Power: 2x7W
Flux(Lm): 744Lm
Angle: 20°/30°
CTN: 12
Material: Iron+Aluminum



SL74221-1/1 x 7W

LED: Bridgelux COB
Power: 1x7W
Flux(Lm): 399Lm
Angle: 20°/30°
CTN: 30
Material: Iron+Aluminum




SL74221-2/2 x 7W

LED: Bridgelux COB
Power: 2x7W
Flux(Lm): 803Lm
Angle: 20°/30°
CTN: 20
Material: Iron+Aluminum


Colortemperature



Color



TULLIO



SL74547/6W

LED: Luminus COB
Power: 6W
Flux(Lm): 282Lm
Angle: 24°/30°
CTN: 50
Material: Aluminum

SL74549/6W

LED: Luminus COB
Power: 6W
Flux(Lm): 282Lm
Angle: 24°/30°
CTN: 50
Material: Aluminum



Colortemperature





Color

☐ ☒ Matt White+Black

IP
20

CRI
90

TULLIO



SL74548/6W

LED: Luminus COB
Power: 6W
Flux(Lm): 282Lm
Angle: 24°/30°
CTN: 50
Material: Aluminum

SL74550/6W

LED: Luminus COB
Power: 6W
Flux(Lm): 282Lm
Angle: 24°/30°
CTN: 50
Material: Aluminum

Colortemperature




Color

☐ ☒ Matt Black

IP
20

CRI
90

TULLIO



SL74556/9W

LED: Luminus COB
Power: 9W
Flux(Lm): 585Lm
Angle: 20°/24°/40°
CTN: 30
Material: Aluminum

SL74558/9W

LED: Luminus COB
Power: 9W
Flux(Lm): 585Lm
Angle: 20°/24°/40°
CTN: 30
Material: Aluminum

Colortemperature



Color

■ Matt White+Black

IP	CRI
20	90

TULLIO



SL74557/9W

LED: Luminus COB
Power: 9W
Flux(Lm): 585Lm
Angle: 20°/24°/40°
CTN: 30
Material: Aluminum

SL74559/9W

LED: Luminus COB
Power: 9W
Flux(Lm): 585Lm
Angle: 20°/24°/40°
CTN: 30
Material: Aluminum

Colortemperature







Color

■ Matt Black

IP	CRI
20	90



TULLIO



SL74551/6W

LED: Luminus COB
Power: 6W
Flux(Lm): 197Lm
Angle: 20°
CTN: 50
Material: Aluminum

SL74552/6W

LED: Luminus COB
Power: 6W
Flux(Lm): 197Lm
Angle: 20°
CTN: 50
Material: Aluminum

SL74564/9W

LED: Luminus COB
Power: 9W
Flux(Lm): 482Lm
Angle: 20°
CTN: 30
Material: Aluminum


SL74565/9W

LED: Luminus COB
Power: 9W
Flux(Lm): 482Lm
Angle: 20°
CTN: 30
Material: Aluminum

Colortemperature





Color



TULLIO



TULLIO



SL74562/7W

LED: Luminus COB
Power: 7W
Flux(Lm): 266Lm
Angle: 8°
CTN: 30
Material: Aluminum

SL74563/7W

LED: Luminus COB
Power: 7W
Flux(Lm): 266Lm
Angle: 8°
CTN: 30
Material: Aluminum

Colortemperature



Color




ELF



ELF



ELF

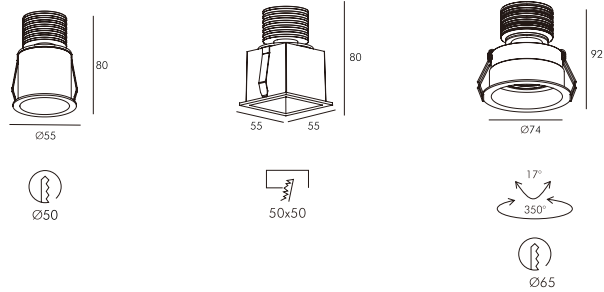

SL74116/5W

LED: CREE SMD
Power: 5W
Flux(Lm): 399Lm
Angle: 12°
CTN: 50
Material: Aluminum

SL74117/5W

LED: CREE SMD
Power: 5W
Flux(Lm): 399Lm
Angle: 12°
CTN: 50
Material: Aluminum

SL74124/5W

LED: CREE SMD
Power: 5W
Flux(Lm): 399Lm
Angle: 12°
CTN: 30
Material: Aluminum

Colortemperature




Color

☐ Sand White
☐ Sand Black

IP	CRI
20	90

ELF

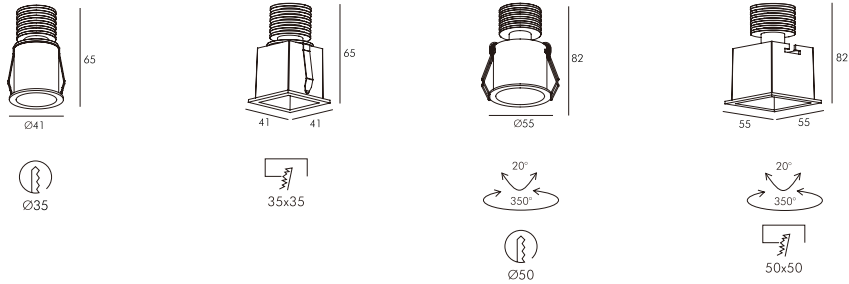

SL74118/3W

LED: Bridgelux SMD
Power: 3W
Flux(Lm): 175Lm
Angle: 24°/8°
CTN: 50
Material: Aluminum

SL74119/3W

LED: Bridgelux SMD
Power: 3W
Flux(Lm): 188Lm
Angle: 24°/8°
CTN: 50
Material: Aluminum

SL74120/3W

LED: Bridgelux SMD
Power: 3W
Flux(Lm): 190Lm
Angle: 24°/8°
CTN: 50
Material: Aluminum

SL74121/3W

LED: Bridgelux SMD
Power: 3W
Flux(Lm): 200Lm
Angle: 24°/8°
CTN: 50
Material: Aluminum


Colortemperature



Color


☐ Sand white
☐ Sand Black

IP	CRI
20	90



SL74123/7W

LED: LUMINUS SMD
Power: 7W
Flux(Lm): 384Lm
Angle: 4°
CTN: 30
Material: Aluminum



SL74122/7W

LED: LUMINUS SMD
Power: 7W
Flux(Lm): 426Lm
Angle: 4°
CTN: 30
Material: Aluminum

Colortemperature



Color



☐ Sand White
☐ Sand Black

IP	CRI
20	95

ELF



ELF



SL74127/3W

LED: Bridgelux SMD
Power: 3W
Flux(Lm): 185Lm
Angle: 24°/8°
CTN: 30
Material: Aluminum

SL74128/5W

LED: CREE SMD
Power: 5W
Flux(Lm): 347Lm
Angle: 12°
CTN: 20
Material: Aluminum

Colortemperature




Color

☐ Sand White

IP
20

CRI
90

MEET
YOUR
NEEDS

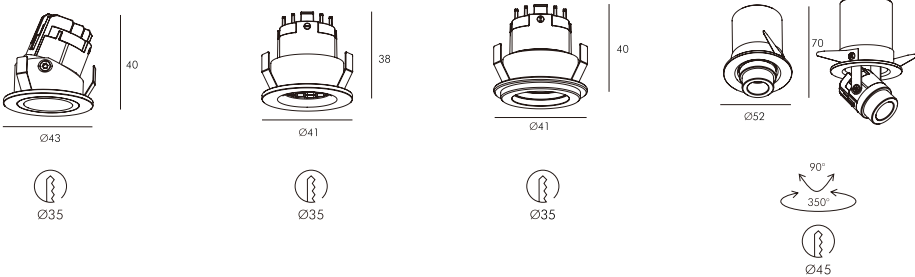

SL74158/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 108Lm
Angle: 24°/15°
CTN: 50
Material: Aluminum

SL74159/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 109Lm
Angle: 24°/15°
CTN: 50
Material: Aluminum


SL74160/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 141Lm
Angle: 8°
CTN: 50
Material: Aluminum

SL74162/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 148Lm
Angle: 24°/15°
CTN: 50
Material: Aluminum

Colortemperature



Color

■ Matt Black


IP
20

CRI
90




RIMINI

15°-24°

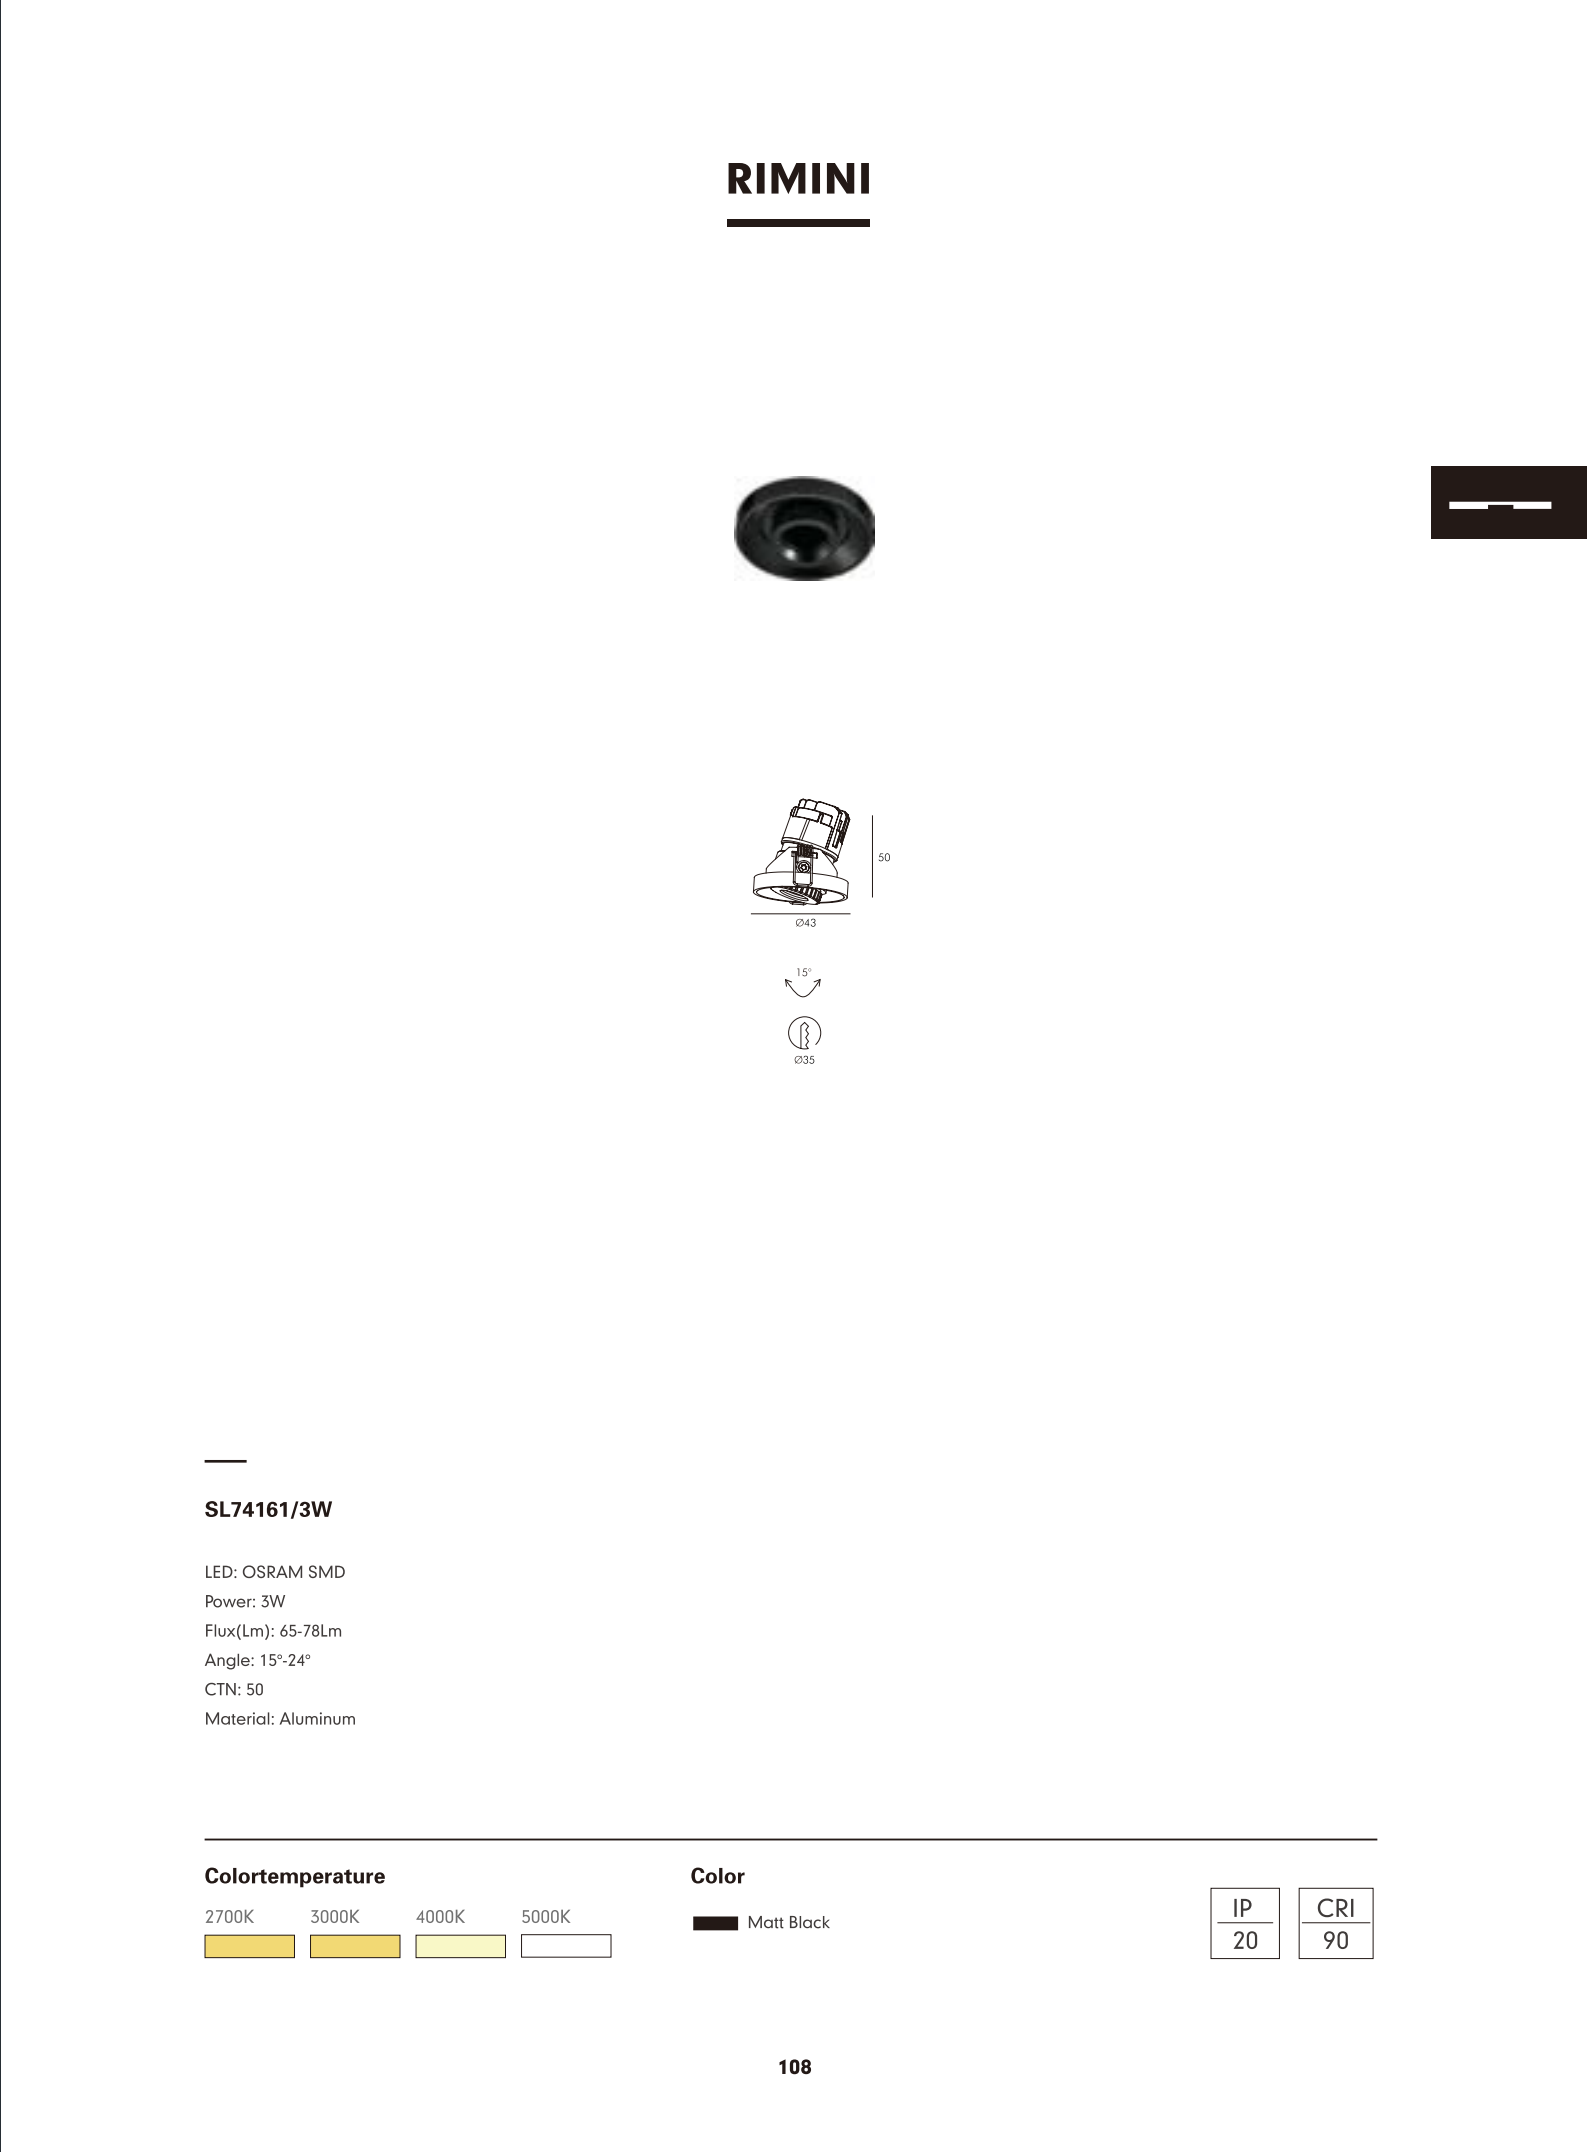

RIMINI



SL74161/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 65-78Lm
Angle: 15°-24°
CTN: 50
Material: Aluminum

Colortemperature






Color

Matt Black

IP
20

CRI
90

RIMINI



SL74348-1/1 x 3W

LED: OSRAM SMD
Power: 1x3W
Flux(Lm): 57Lm
Angle: 30°/15°
CTN: 50
Material: Aluminum

SL74348-2/2 x 3W

LED: OSRAM SMD
Power: 2x3W
Flux(Lm): 102Lm
Angle: 30°/15°
CTN: 50
Material: Aluminum

SL74348-4/4 x 3W

LED: OSRAM SMD
Power: 4x3W
Flux(Lm): 200Lm
Angle: 30°/15°
CTN: 30
Material: Aluminum

Colortemperature





Color

 Matt Black
 Gold



RIMINI



SL74188/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 119Lm
Angle: 8°
CTN: 30
Material: Aluminum

SL74189/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 128Lm
Angle: 8°
CTN: 30
Material: Aluminum

Colortemperature



Color (SL74188)

 Sand White
 Sand Black

Color (SL74189)




 Sand White+Black
 Sand Black



RIMINI



RIMINI



SL74366/3W

LED: OSRAM SMD
Power: 3W
CTN: 50
Material: Aluminum


SL74367/3W

LED: OSRAM SMD
Power: 3W
CTN: 50
Material: Aluminum

SL74368/3W

LED: OSRAM SMD
Power: 3W
CTN: 50
Material: Aluminum

Colortemperature



Color



PICCOLO


P I C C O L O



PICCOLO



PICCOLO

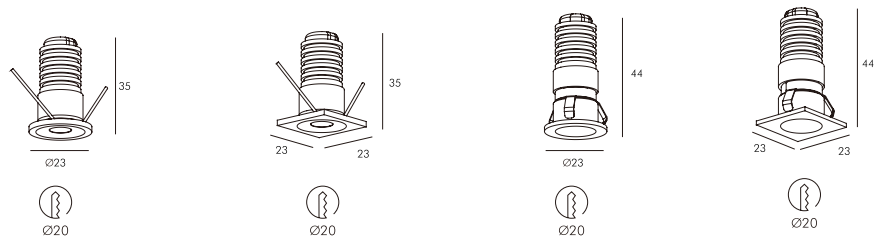

SL74178/1W

LED: OSRAM SMD
Power: 1W
Flux(Lm): 65Lm
Angle: 15°/24°
CTN: 50
Material: Aluminum

SL74179/1W

LED: OSRAM SMD
Power: 1W
Flux(Lm): 65Lm
Angle: 15°/24°
CTN: 50
Material: Aluminum


SL74180/1W

LED: OSRAM SMD
Power: 1W
Flux(Lm): 65Lm
Angle: 15°/24°
CTN: 50
Material: Aluminum

SL74181/1W

LED: OSRAM SMD
Power: 1W
Flux(Lm): 65Lm
Angle: 15°/24°
CTN: 50
Material: Aluminum

Colortemperature




Color

- Matt White
- Matt Black



PICCOLO

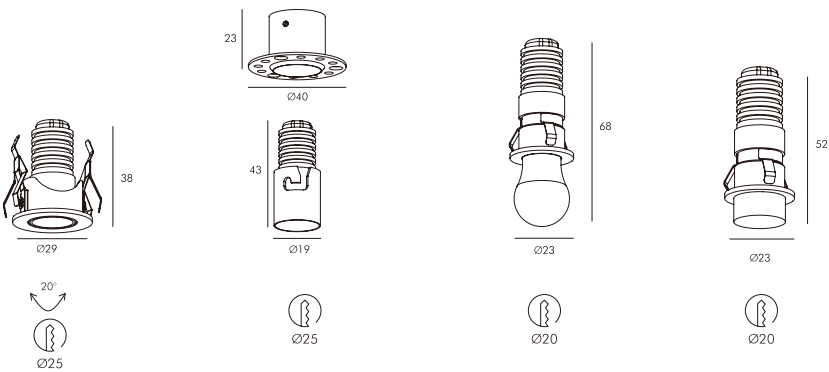

SL74182/1W

LED: OSRAM SMD
Power: 1W
Flux(Lm): 65Lm
Angle: 15°/24°
CTN: 50
Material: Aluminum

SL74183/1W

LED: OSRAM SMD
Power: 1W
Flux(Lm): 65Lm
Angle: 15°/24°
CTN: 50
Material: Aluminum

SL74184/1W

LED: OSRAM SMD
Power: 1W
Flux(Lm): 35Lm
Angle: 24°
CTN: 50
Material: Aluminum

SL74185/1W

LED: OSRAM SMD
Power: 1W
Flux(Lm): 39Lm
Angle: 45°
CTN: 50
Material: Aluminum

Colortemperature




Color

- Matt White
- Matt Black






PICCOLO

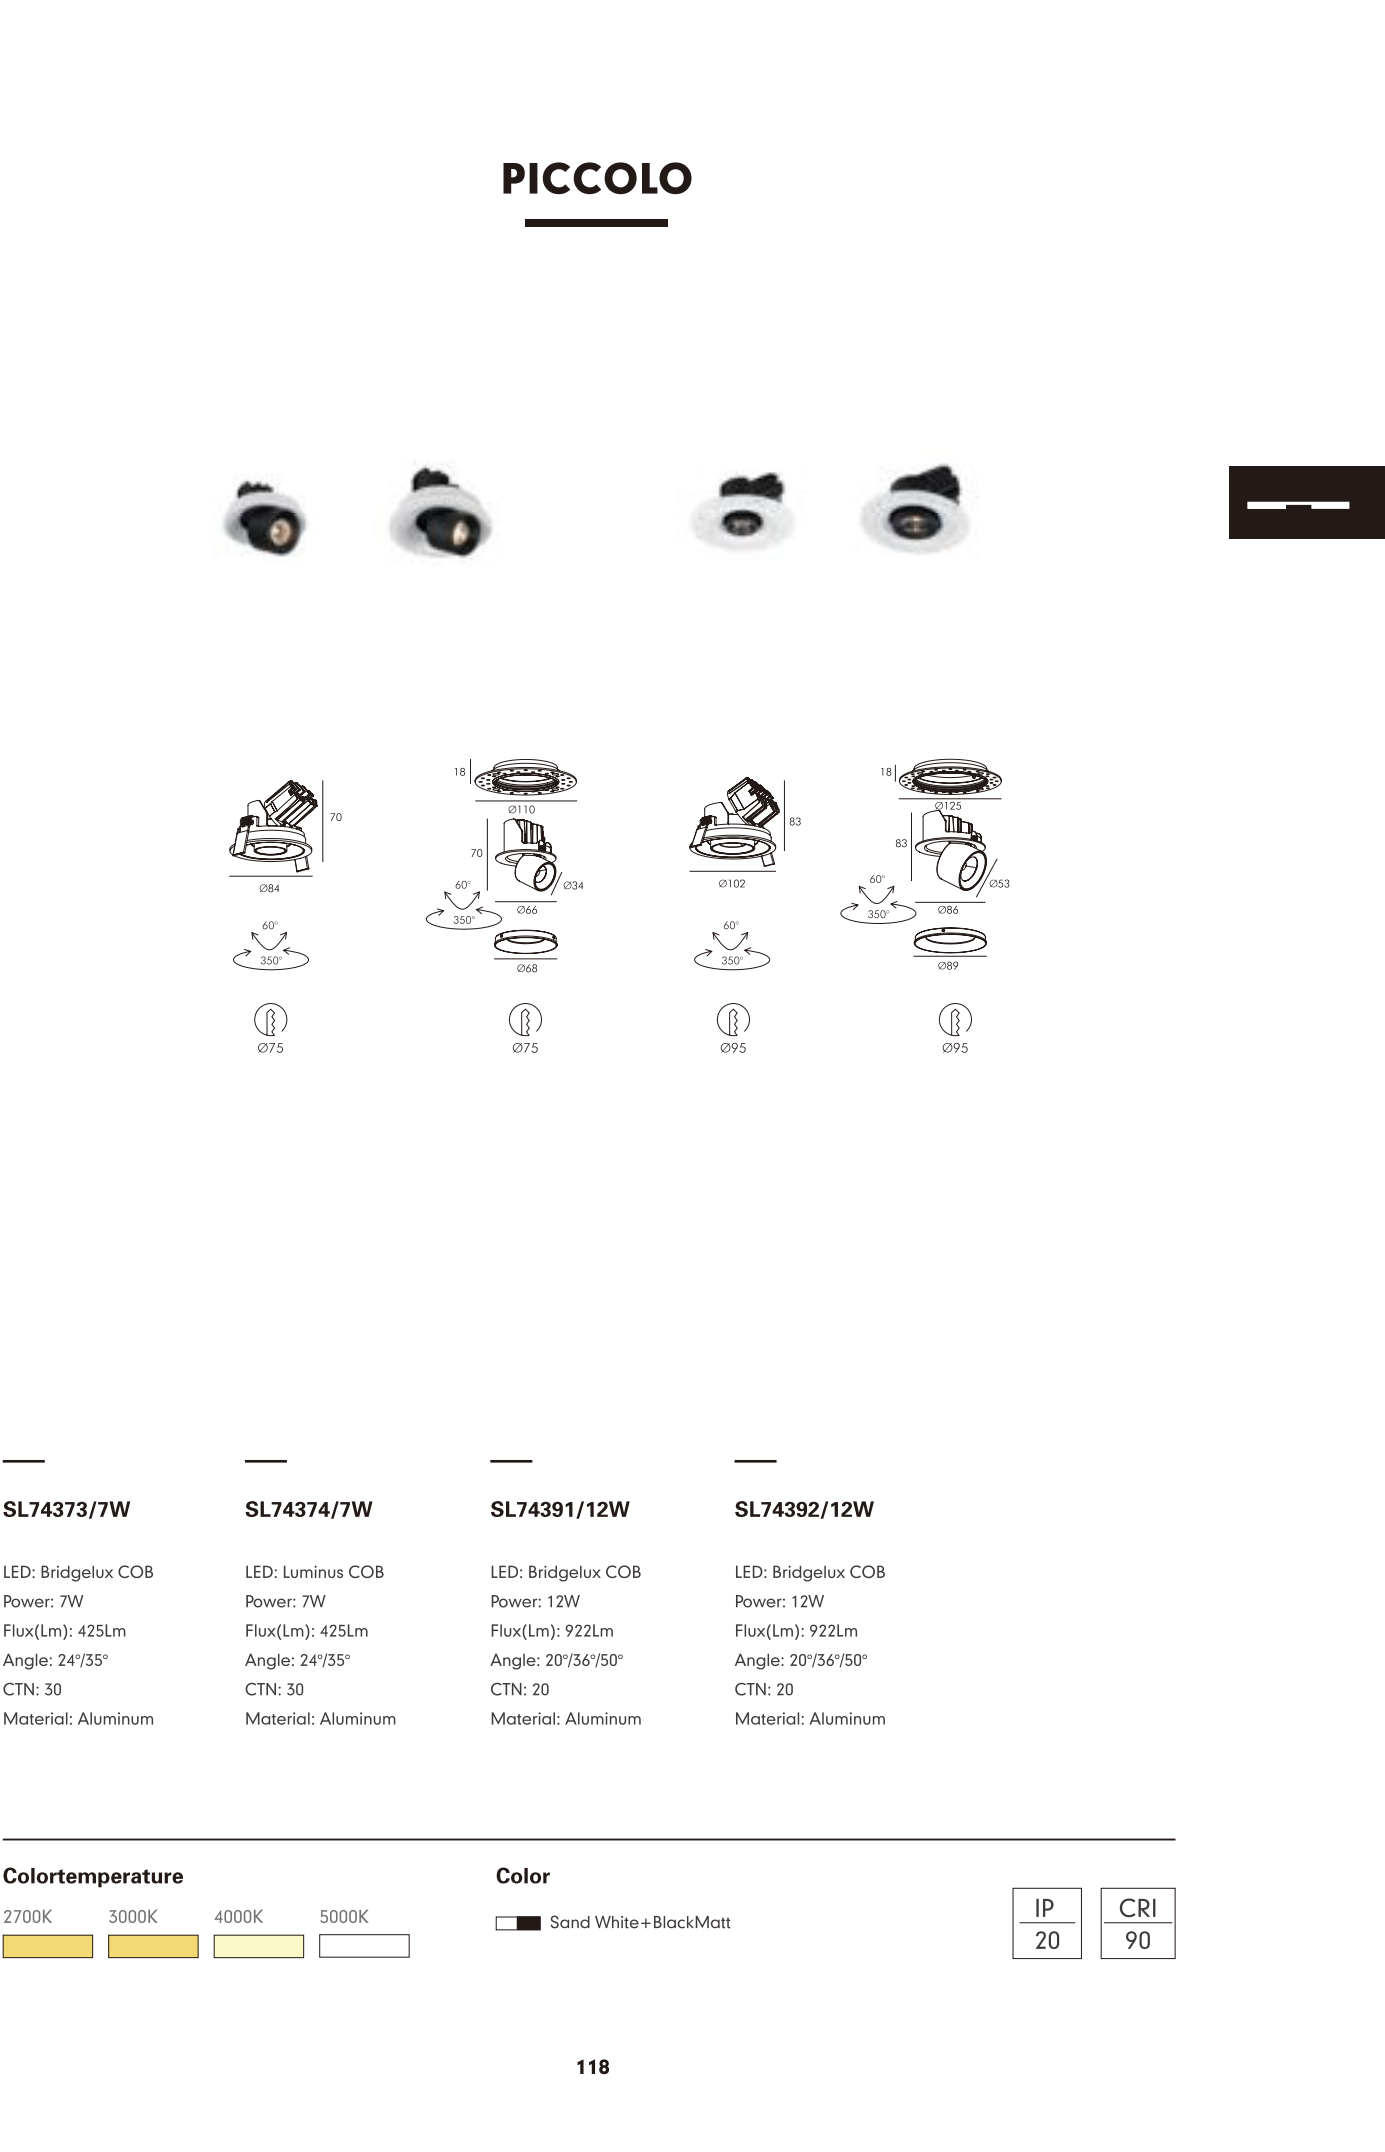

PICCOLO

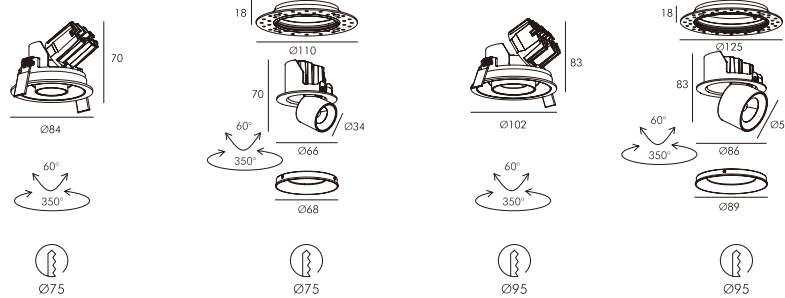

SL74373/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 425Lm
Angle: 24°/35°
CTN: 30
Material: Aluminum

SL74374/7W

LED: Luminus COB
Power: 7W
Flux(Lm): 425Lm
Angle: 24°/35°
CTN: 30
Material: Aluminum

SL74391/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 922Lm
Angle: 20°/36°/50°
CTN: 20
Material: Aluminum

SL74392/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 922Lm
Angle: 20°/36°/50°
CTN: 20
Material: Aluminum

Colortemperature



Color



■ Sand White+BlackMatt

IP
20

CRI
90



RIETI



SL74369/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 380Lm
Angle: 18°/24°/36°
CTN: 30
Material: Aluminum

SLC74369/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 380Lm
Angle: 18°/24°/36°
CTN: 30
Material: Aluminum

SL74370/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 380Lm
Angle: 18°/24°/36°
CTN: 30
Material: Aluminum



Colortemperature

2700K	3000K	4000K

Color


- Sand White+Black
- Sand White+Gold

IP
20

CRI
90



RIETI



SL74386/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 938Lm
Angle: 20°
CTN: 12
Material: Aluminum

SLC74386/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 938Lm
Angle: 20°
CTN: 20
Material: Aluminum

Colortemperature


2700K	3000K	4000K

Color

Sand White+Black	Sand Black
Sand White+Gold	Sand Black+Gold

IP 20	CRI 90
----------	-----------




RIETI

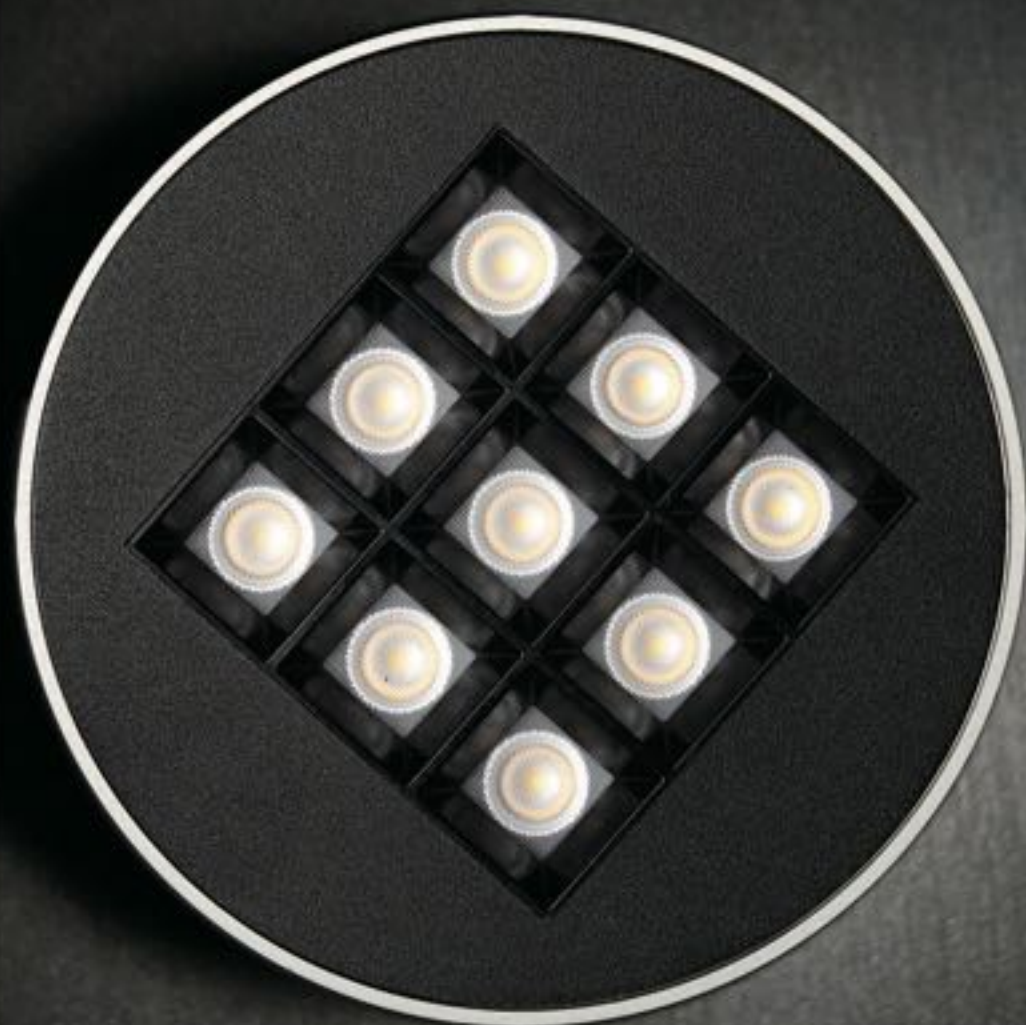

RIETI



RIETI



SL74265/4 x 2W

LED: HY SMD
Power: 4x2W
Flux(Lm): 495Lm
Angle: 24°/15°
CTN: 20
Material: Aluminum

SLC74265/4 x 2W

LED: HY SMD
Power: 4x2W
Flux(Lm): 495Lm
Angle: 24°/15°
CTN: 20
Material: Aluminum

SLC74265B/4 x 2W

LED: HY SMD
Power: 4x2W
Flux(Lm): 495Lm
Angle: 24°/15°
CTN: 20
Material: Aluminum

Colortemperature






Color

☐ Sand White+Black
☐ Sand Black

IP	CRI
20	90

RIETI



SL74266/9 x 2W

LED: HY SMD
Power: 9x2W
Flux(Lm): 1433Lm
Angle: 24°/15°
CTN: 12
Material: Aluminum

SLC74266/9 x 2W

LED: HY SMD
Power: 9x2W
Flux(Lm): 1433Lm
Angle: 24°/15°
CTN: 12
Material: Aluminum

SLC74266B/9 x 2W

LED: HY SMD
Power: 9x2W
Flux(Lm): 1433Lm
Angle: 24°/15°
CTN: 12
Material: Aluminum

Colortemperature




Color

☐ Sand White+Black
☐ Sand Black


IP	CRI
20	90

TRANSFORMERS


TRANSFORMERS




SL74077/7W
LED: Bridgelux COB
Power: 7W
Flux(Lm): 395Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum




SL74097/12W
LED: Bridgelux COB
Power: 12W
Flux(Lm): 800Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum




SL74078/7W
LED: Bridgelux COB
Power: 7W
Flux(Lm): 395Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum



SL74058/12W
LED: Bridgelux COB
Power: 12W
Flux(Lm): 800Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum



SL74079/7W
LED: Bridgelux COB
Power: 7W
Flux(Lm): 395Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum



SL74066/12W
LED: Bridgelux COB
Power: 12W
Flux(Lm): 800Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum

Colortemperature

2700K

3000K

4000K


5000K

Color

Sand White + Black


IP	CRI
20	90

TRANSFORMERS




GL7117-1/1 x 12W

LED: Bridgelux COB
Power: 1x12W
Flux(Lm): 800Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum




GL7117-2/2 x 12W

LED: Bridgelux COB
Power: 2x12W
Flux(Lm): 1540Lm
Angle: 24°/15°/35°
CTN: 12
Material: Aluminum



GL7119-1/1 x 12W

LED: Bridgelux COB
Power: 1x12W
Flux(Lm): 800Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum



GL7119-2/2 x 12W

LED: Bridgelux COB
Power: 2x12W
Flux(Lm): 1540Lm
Angle: 24°/15°/35°
CTN: 12
Material: Aluminum

Colortemperature


2700K	3000K	4000K	5000K

Color

☐ Sand White+Black

IP	CRI
20	90

TRANSFORMERS



SL74114/25W

LED: Bridgelux COB
Power: 25W
Flux(Lm): 1910Lm
Angle: 30°/15°/45°
CTN: 12
Material: Aluminum

Colortemperature

2700K	3000K	4000K	5000K

Color

☐ Sand White+Black


IP	CRI
20	90






IP RATINGS
IP65

SORI




SL74522/5W

LED: Bridgelux COB
Power: 5W
Flux(Lm): 326Lm
Angle: 24°/30°/35°
CTN: 30
Material: Aluminum



SL74523/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 777Lm
Angle: 24°/35°/50°
CTN: 30
Material: Aluminum



SL74524/15W

LED: Bridgelux COB
Power: 15W
Flux(Lm): 1115Lm
Angle: 24°/35°/50°
CTN: 30
Material: Aluminum

Colortemperature





Color

 Sand Black

IP	CRI
65	90



VENICE



IP RATINGS
IP65

SL74530/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 477Lm
Angle: 15°/24°/45°
CTN: 30
Material: Aluminum

SL74536/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 565Lm
Angle: 15°/24°/45°
CTN: 30
Material: Aluminum

Colortemperature





Color



IP	CRI
65	90

VENICE



SL74535/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 635Lm
Angle: 35°
CTN: 30
Material: Aluminum

SL74531/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 740Lm
Angle: 20°/24°/55°
CTN: 30
Material: Aluminum

Colortemperature






Color



IP	CRI
65	90

VENICE



SL74532/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 336Lm
Angle: 36°/45°
CTN: 30
Material: Aluminum


SL74533/10W

LED: Luminus SMD
Power: 10W
Flux(Lm): 227Lm
Angle: 9°
CTN: 30
Material: Aluminum


SL74534/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 765Lm
Angle: 60x36°
CTN: 30
Material: Aluminum

Colortemperature





Color



IP	CRI
65	90

HELEN



SL74249/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 637Lm
Angle: 24°/35°
CTN: 30
Material: Aluminum

SL74250/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 637Lm
Angle: 24°/35°
CTN: 30
Material: Aluminum

Colortemperature



Color



IP	CRI
44	90



HELEN



HELEN



HELEN




SL74389/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 670Lm
Angle: 80×39°
CTN: 30
Material: Aluminum

SL74390/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 670Lm
Angle: 80×39°
CTN: 30
Material: Aluminum

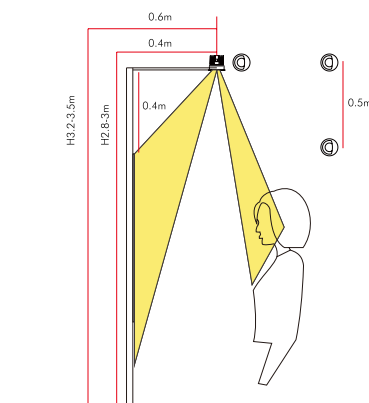

Colortemperature


2700K 3000K 4000K 5000K

Color




 Sand White
 Sand Black

IP	CRI
44	90

GRID

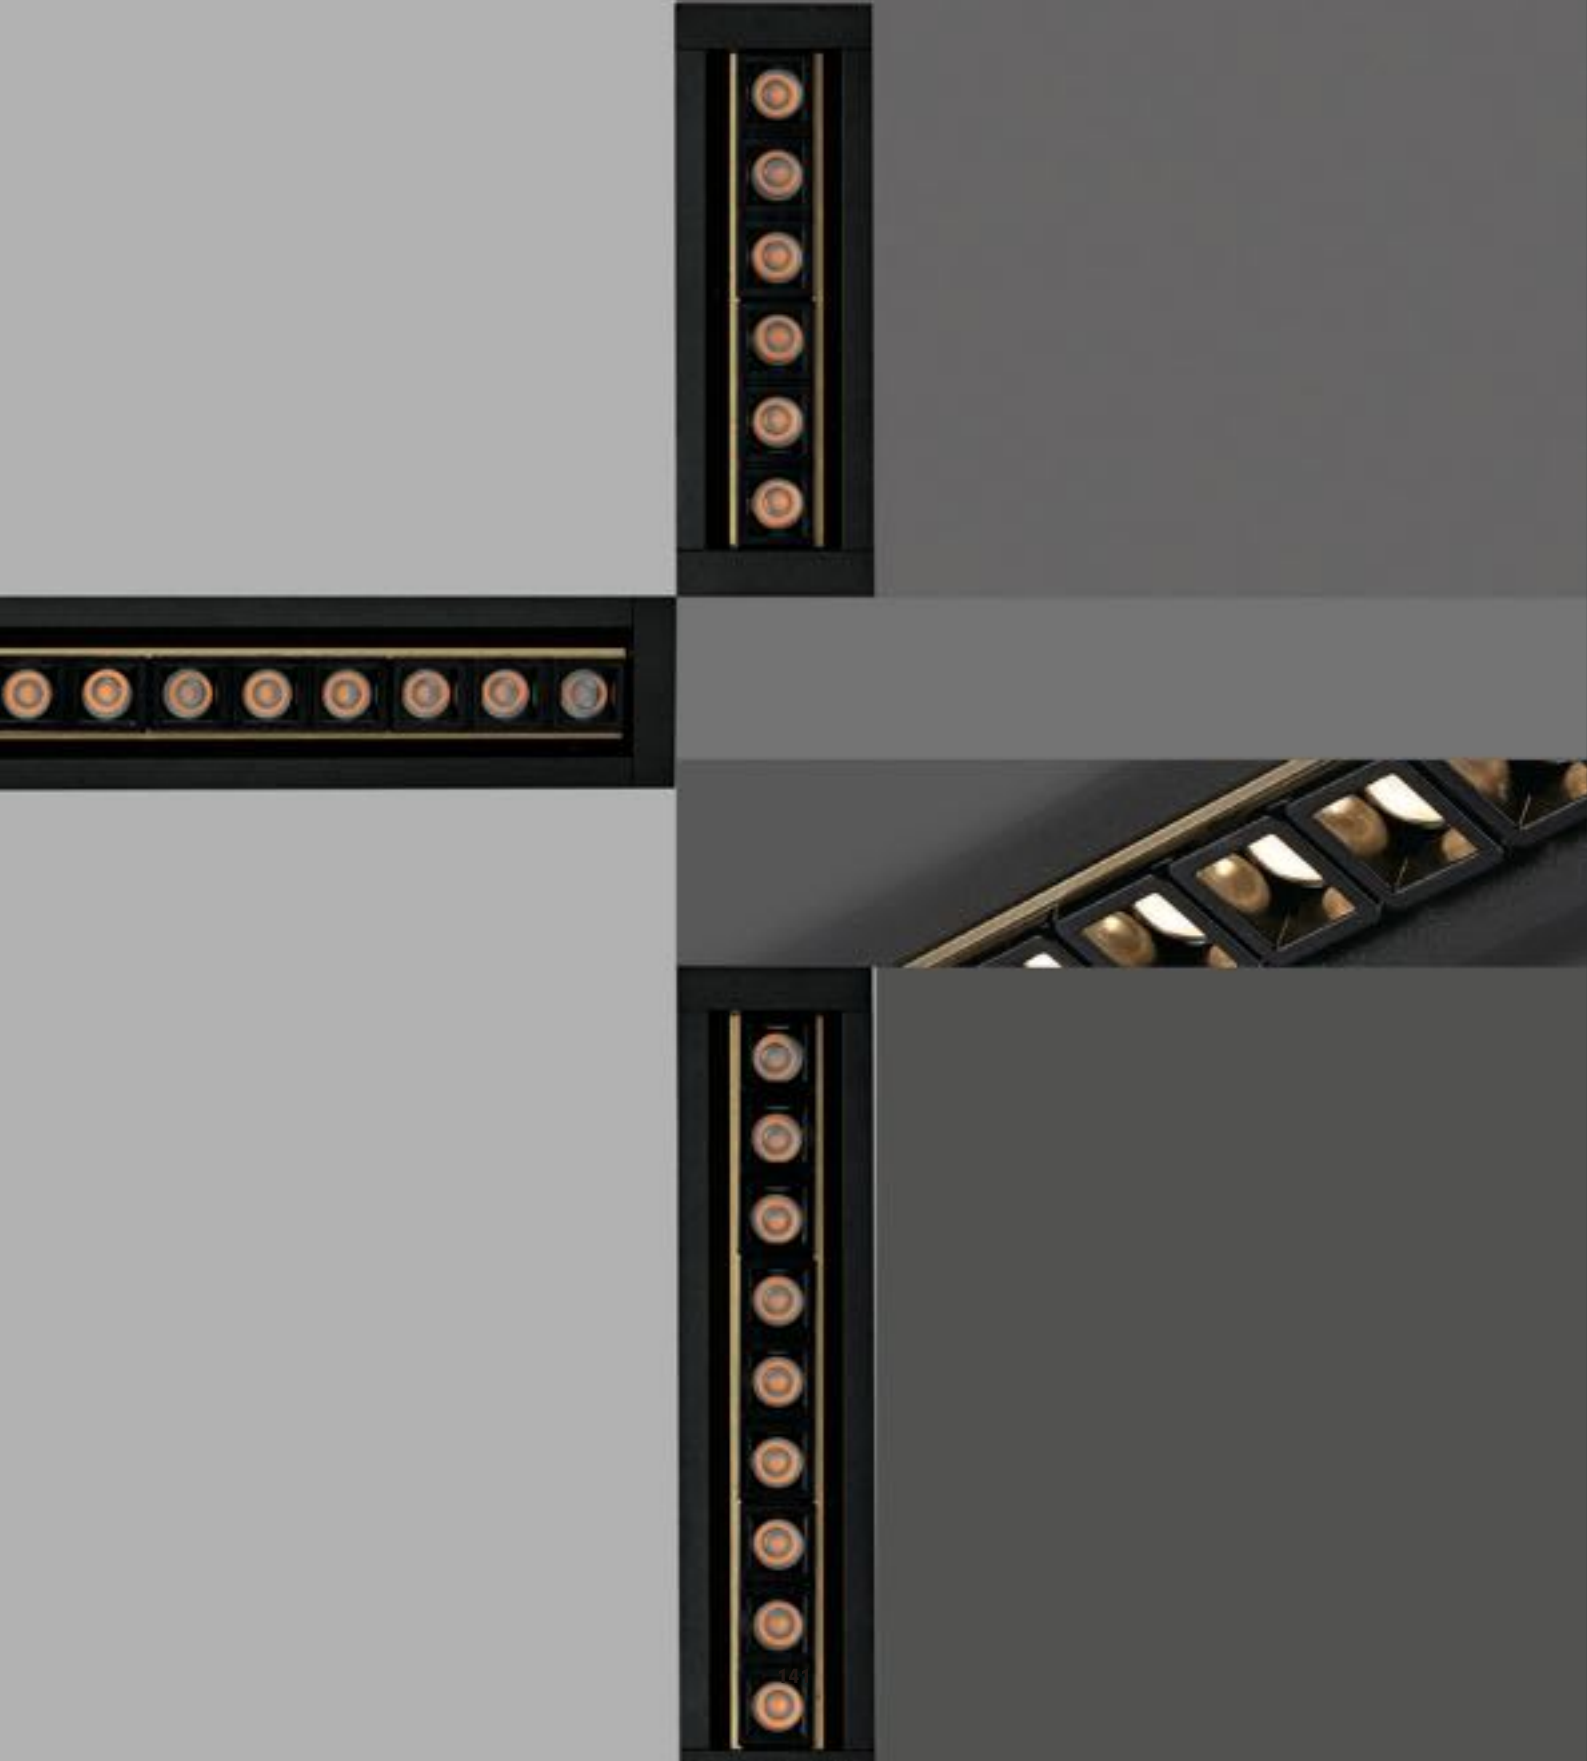

GRID



SL74165/6 × 2W

LED: OSRAM SMD
Power: 6x2W
Flux(Lm): 745Lm
Angle: 24°/15°
CTN: 30
Material: Aluminum


SL74166/9 × 2W

LED: OSRAM SMD
Power: 9x2W
Flux(Lm): 1125Lm
Angle: 24°/15°
CTN: 20
Material: Aluminum

SL74167/12 × 2W

LED: OSRAM SMD
Power: 12x2W
Flux(Lm): 1416Lm
Angle: 24°/15°
CTN: 12
Material: Aluminum

Colortemperature




Color


 Sand Black+Gold

IP	CRI
20	90

TOMMASO

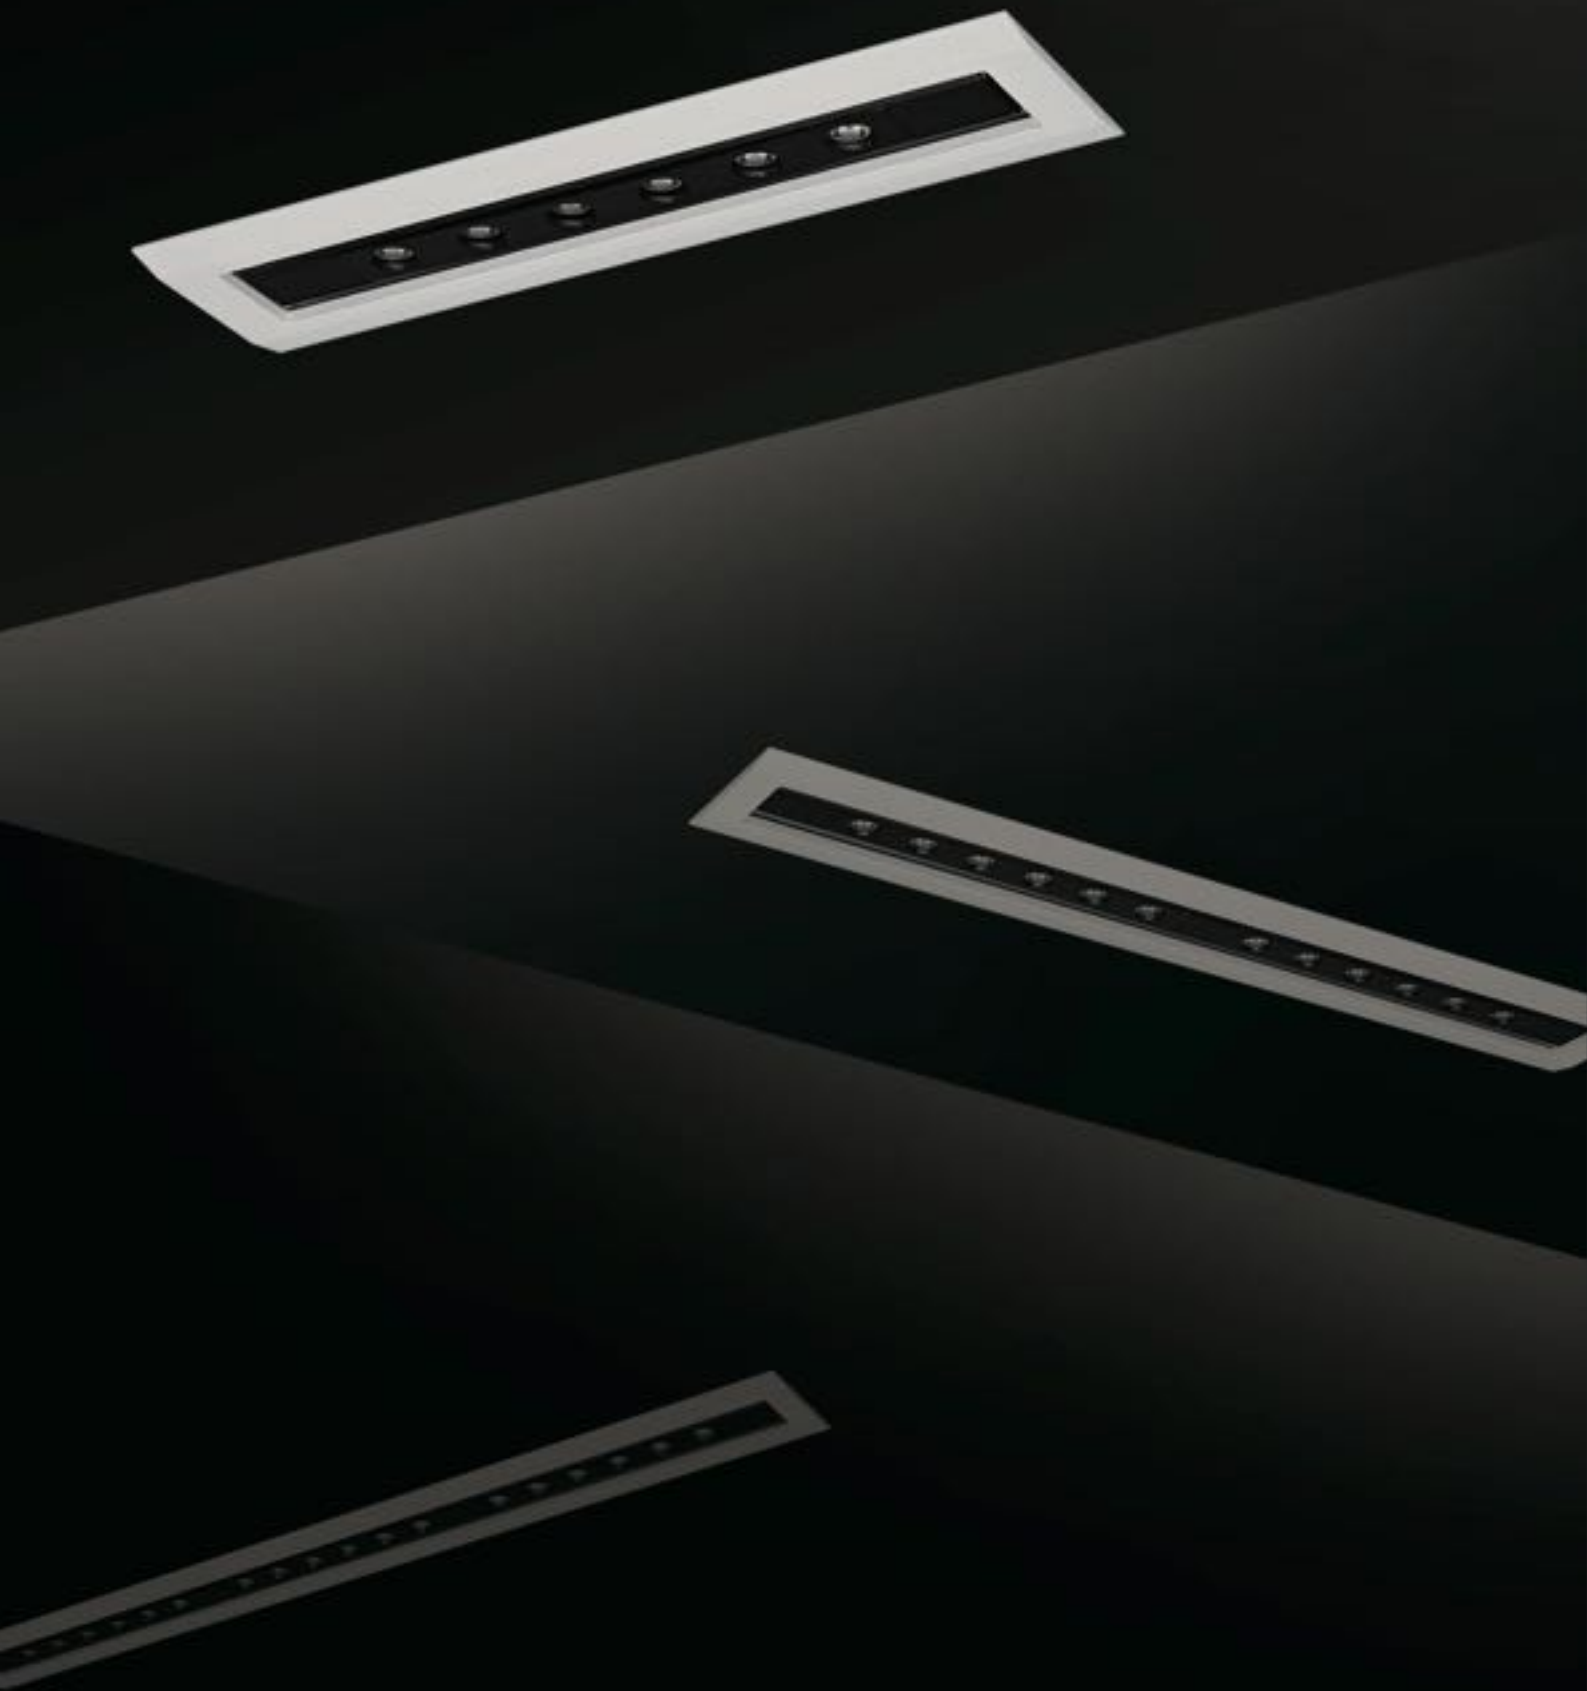

TOMMASO

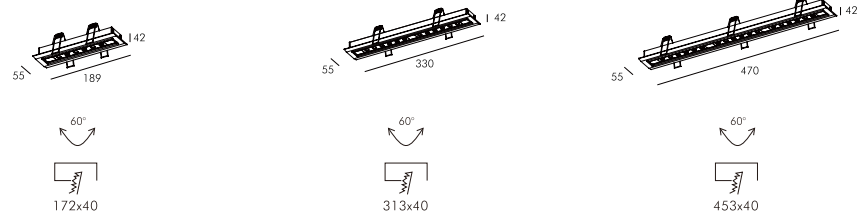

SL74191/6 × 1W

LED: Bridgelux SMD
Power: 6×1W
Flux(Lm): 403Lm
Angle: 24°/36°
CTN: 20
Material: Iron+Aluminum

SL74192/12 × 1W

LED: Bridgelux SMD
Power: 12×1W
Flux(Lm): 869Lm
Angle: 24°/36°
CTN: 12
Material: Iron+Aluminum


SL74193/18 × 1W

LED: Bridgelux SMD
Power: 18×1W
Flux(Lm): 1325Lm
Angle: 24°/36°
CTN: 12
Material: Iron+Aluminum

Colortemperature




Color



IP	CRI
20	90

GRIYA

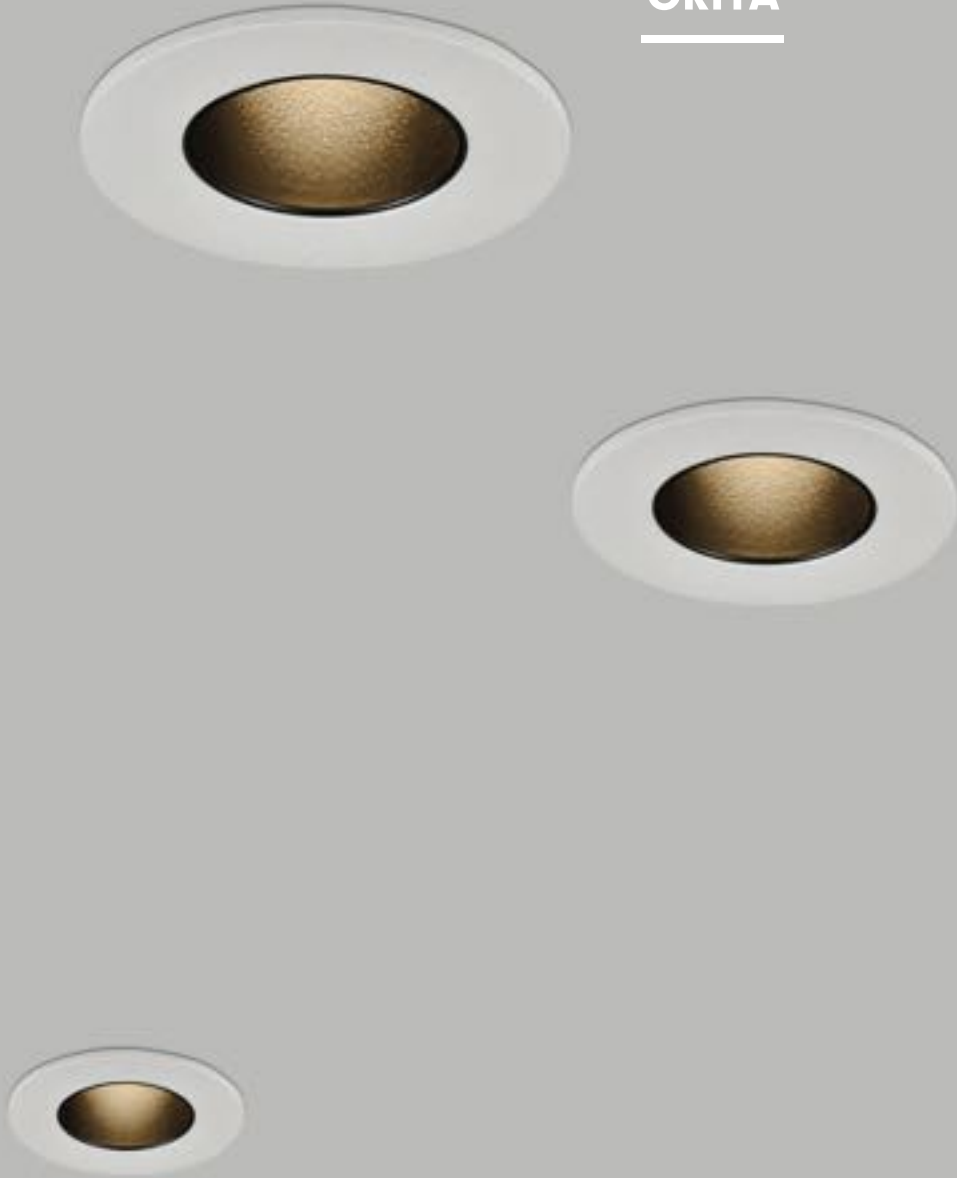

GRIYA




SL74320/3W

LED: Bridgelux SMD
Power: 3W
Flux(Lm): 156Lm
Angle: 20°/24°/50°
CTN: 50
Material: Aluminum

Colortemperature





Color



IP	CRI
20	90

GRIYA



SL74321/2 × 2.5W

LED: Latticepower SMD
Power: 2×2.5W
Flux(Lm): 297Lm
Angle: 24°/10°/18°/30°
CTN: 30
Material: Aluminum

SL74328/5 × 2.5W

LED: Latticepower SMD
Power: 5×2.5W
Flux(Lm): 623Lm
Angle: 24°/10°/18°/30°
CTN: 30
Material: Aluminum


SL74336/10 × 2.5W

LED: Latticepower SMD
Power: 10×2.5W
Flux(Lm): 1485Lm
Angle: 24°/10°/18°/30°
CTN: 12
Material: Aluminum




Colortemperature



Color



GRIYA



SL74322/2 × 2.5W

LED: Latticepower SMD
Power: 2×2.5W
Flux(Lm): 297Lm
Angle: 24°/10°/18°/30°
CTN: 20
Material: Aluminum

SL74329/5 × 2.5W

LED: Latticepower SMD
Power: 5×2.5W
Flux(Lm): 623Lm
Angle: 24°/10°/18°/30 °
CTN: 20
Material: Aluminum


SL74337/10 × 2.5W

LED: Latticepower SMD
Power: 10×2.5W
Flux(Lm): 1485Lm
Angle: 24°/10°/18°/30°
CTN: 12
Material: Aluminum

Colortemperature



Color



GRIYA




SL74500/3 × 2W

LED: YS SMD
Power: 3x2W
Flux(Lm): 354Lm
Angle: 24°/30°/40°
CTN: 30
Material: Aluminum



Colortemperature




Color

☐ Sand White+Black ☐ Sand Black

IP	CRI
20	90

GRIYA

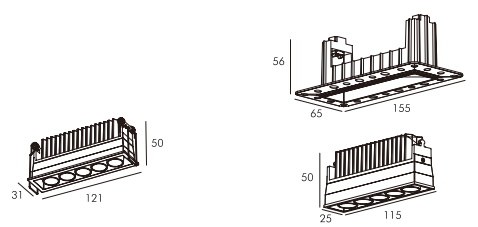

SL74501/5 × 2W

LED: YS SMD
Power: 5x2W
Flux(Lm): 551Lm
Angle: 24°/30°/40°
CTN: 30
Material: Aluminum

SL74507/5 × 2W

LED: YS SMD
Power: 5x2W
Flux(Lm): 551Lm
Angle: 24°/30°/40°
CTN: 20
Material: Aluminum

Colortemperature



Color

☐ Sand White+Black ☐ Sand Black


IP	CRI
20	90

GRIYA



SL74502/4 x 2W

LED: HY SMD
Power: 4x2W
Flux(Lm): 392Lm
Angle: 24°/30°/40°
CTN: 30
Material: Aluminum




SL74508/4 x 2W

LED: HY SMD
Power: 4x2W
Flux(Lm): 392Lm
Angle: 24°/30°/40°
CTN: 30
Material: Aluminum



Colortemperature




Color

☐ Sand White+Black ☐ Sand Black

IP
20

CRI
90

GRIYA



SL74503/9 x 2W

LED: HY SMD
Power: 9x2W
Flux(Lm): 929Lm
Angle: 24°/30°/40°
CTN: 30
Material: Aluminum

Colortemperature



Color


☐ Sand White+Black ☐ Sand Black

IP
20

CRI
90



GRIYA



SLC78070/5 x 2W

LED: HY SMD
Power: 5x2W
Flux(Lm): 551Lm
Angle: 24°/30°/40°
CTN: 20
Material: Aluminum

SLC78069/4 x 2W

LED: HY SMD
Power: 4x2W
Flux(Lm): 392Lm
Angle: 24°/30°/40°
CTN: 30
Material: Aluminum


Colortemperature



Color



GRIYA

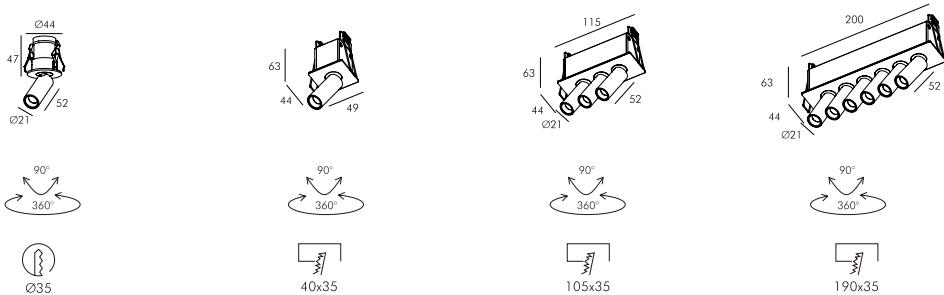

SL74292/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 143Lm
Angle: 24°/15°
CTN: 30
Material: Aluminum

SL74291/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 143Lm
Angle: 24°/15°
CTN: 30
Material: Aluminum


SL74295/3 × 2W

LED: OSRAM SMD
Power: 3x2W
Flux(Lm): 413Lm
Angle: 24°/15°
CTN: 20
Material: Aluminum

SL74296/6 × 2W

LED: OSRAM SMD
Power: 6x2W
Flux(Lm): 705Lm
Angle: 24°/15°
CTN: 20
Material: Aluminum

Colortemperature




Color

☒ Sand White+Black

IP	CRI
20	90

GRIYA

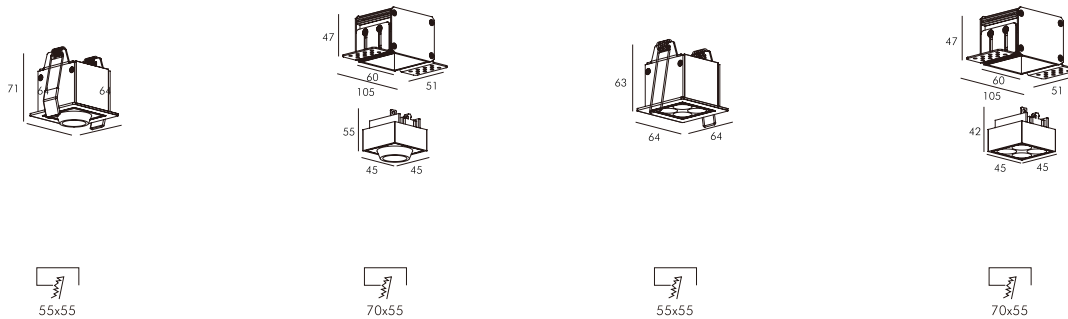

SL74242/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 372Lm
Angle: 30°/38°
CTN: 30
Material: Aluminum

SL74243/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 372Lm
Angle: 30°/38°
CTN: 30
Material: Aluminum


SL74287/4 × 1.5W

LED: OSRAM SMD
Power: 4x1.5W
Flux(Lm): 443Lm
Angle: 35°/50°
CTN: 30
Material: Aluminum

SL74289/4 × 1.5W

LED: OSRAM SMD
Power: 4x1.5W
Flux(Lm): 443Lm
Angle: 35°/50°
CTN: 30
Material: Aluminum

Colortemperature



Color


☒ Sand White+Black

IP	CRI
20	90




GRIYA

GRIYA




SLC78090/4x2.5W

LED: Latticepower SMD
Power: 4x2.5W
Flux(Lm): 607Lm
Angle: 24°/15°/36°
CTN: 30
Material: Aluminum



SLC78091/4x2.5W

LED: Latticepower SMD
Power: 4x2.5W
Flux(Lm): 262Lm
Angle: 24°/15°
CTN: 20
Material: Aluminum



SLC78089/4 x 1.5W

LED: OSRAM SMD
Power: 4x1.5W
Flux(Lm): 443Lm
Angle: 35°/50°
CTN: 30
Material: Aluminum

Colortemperature



Color

SLC78090 SLC78091
Sand Black
Sand White+Black


SLC78089
Sand White+Black

IP	CRI
20	90

GRIYA



GRIYA



SL74229/10W

LED:LUMINUS COB
Power: 10W
Flux(Lm): 470Lm
Angle: 15°/20°/30°
CTN: 30
Material: Aluminum


Colortemperature




Color

■ Sand White+Black

IP	CRI
20	90

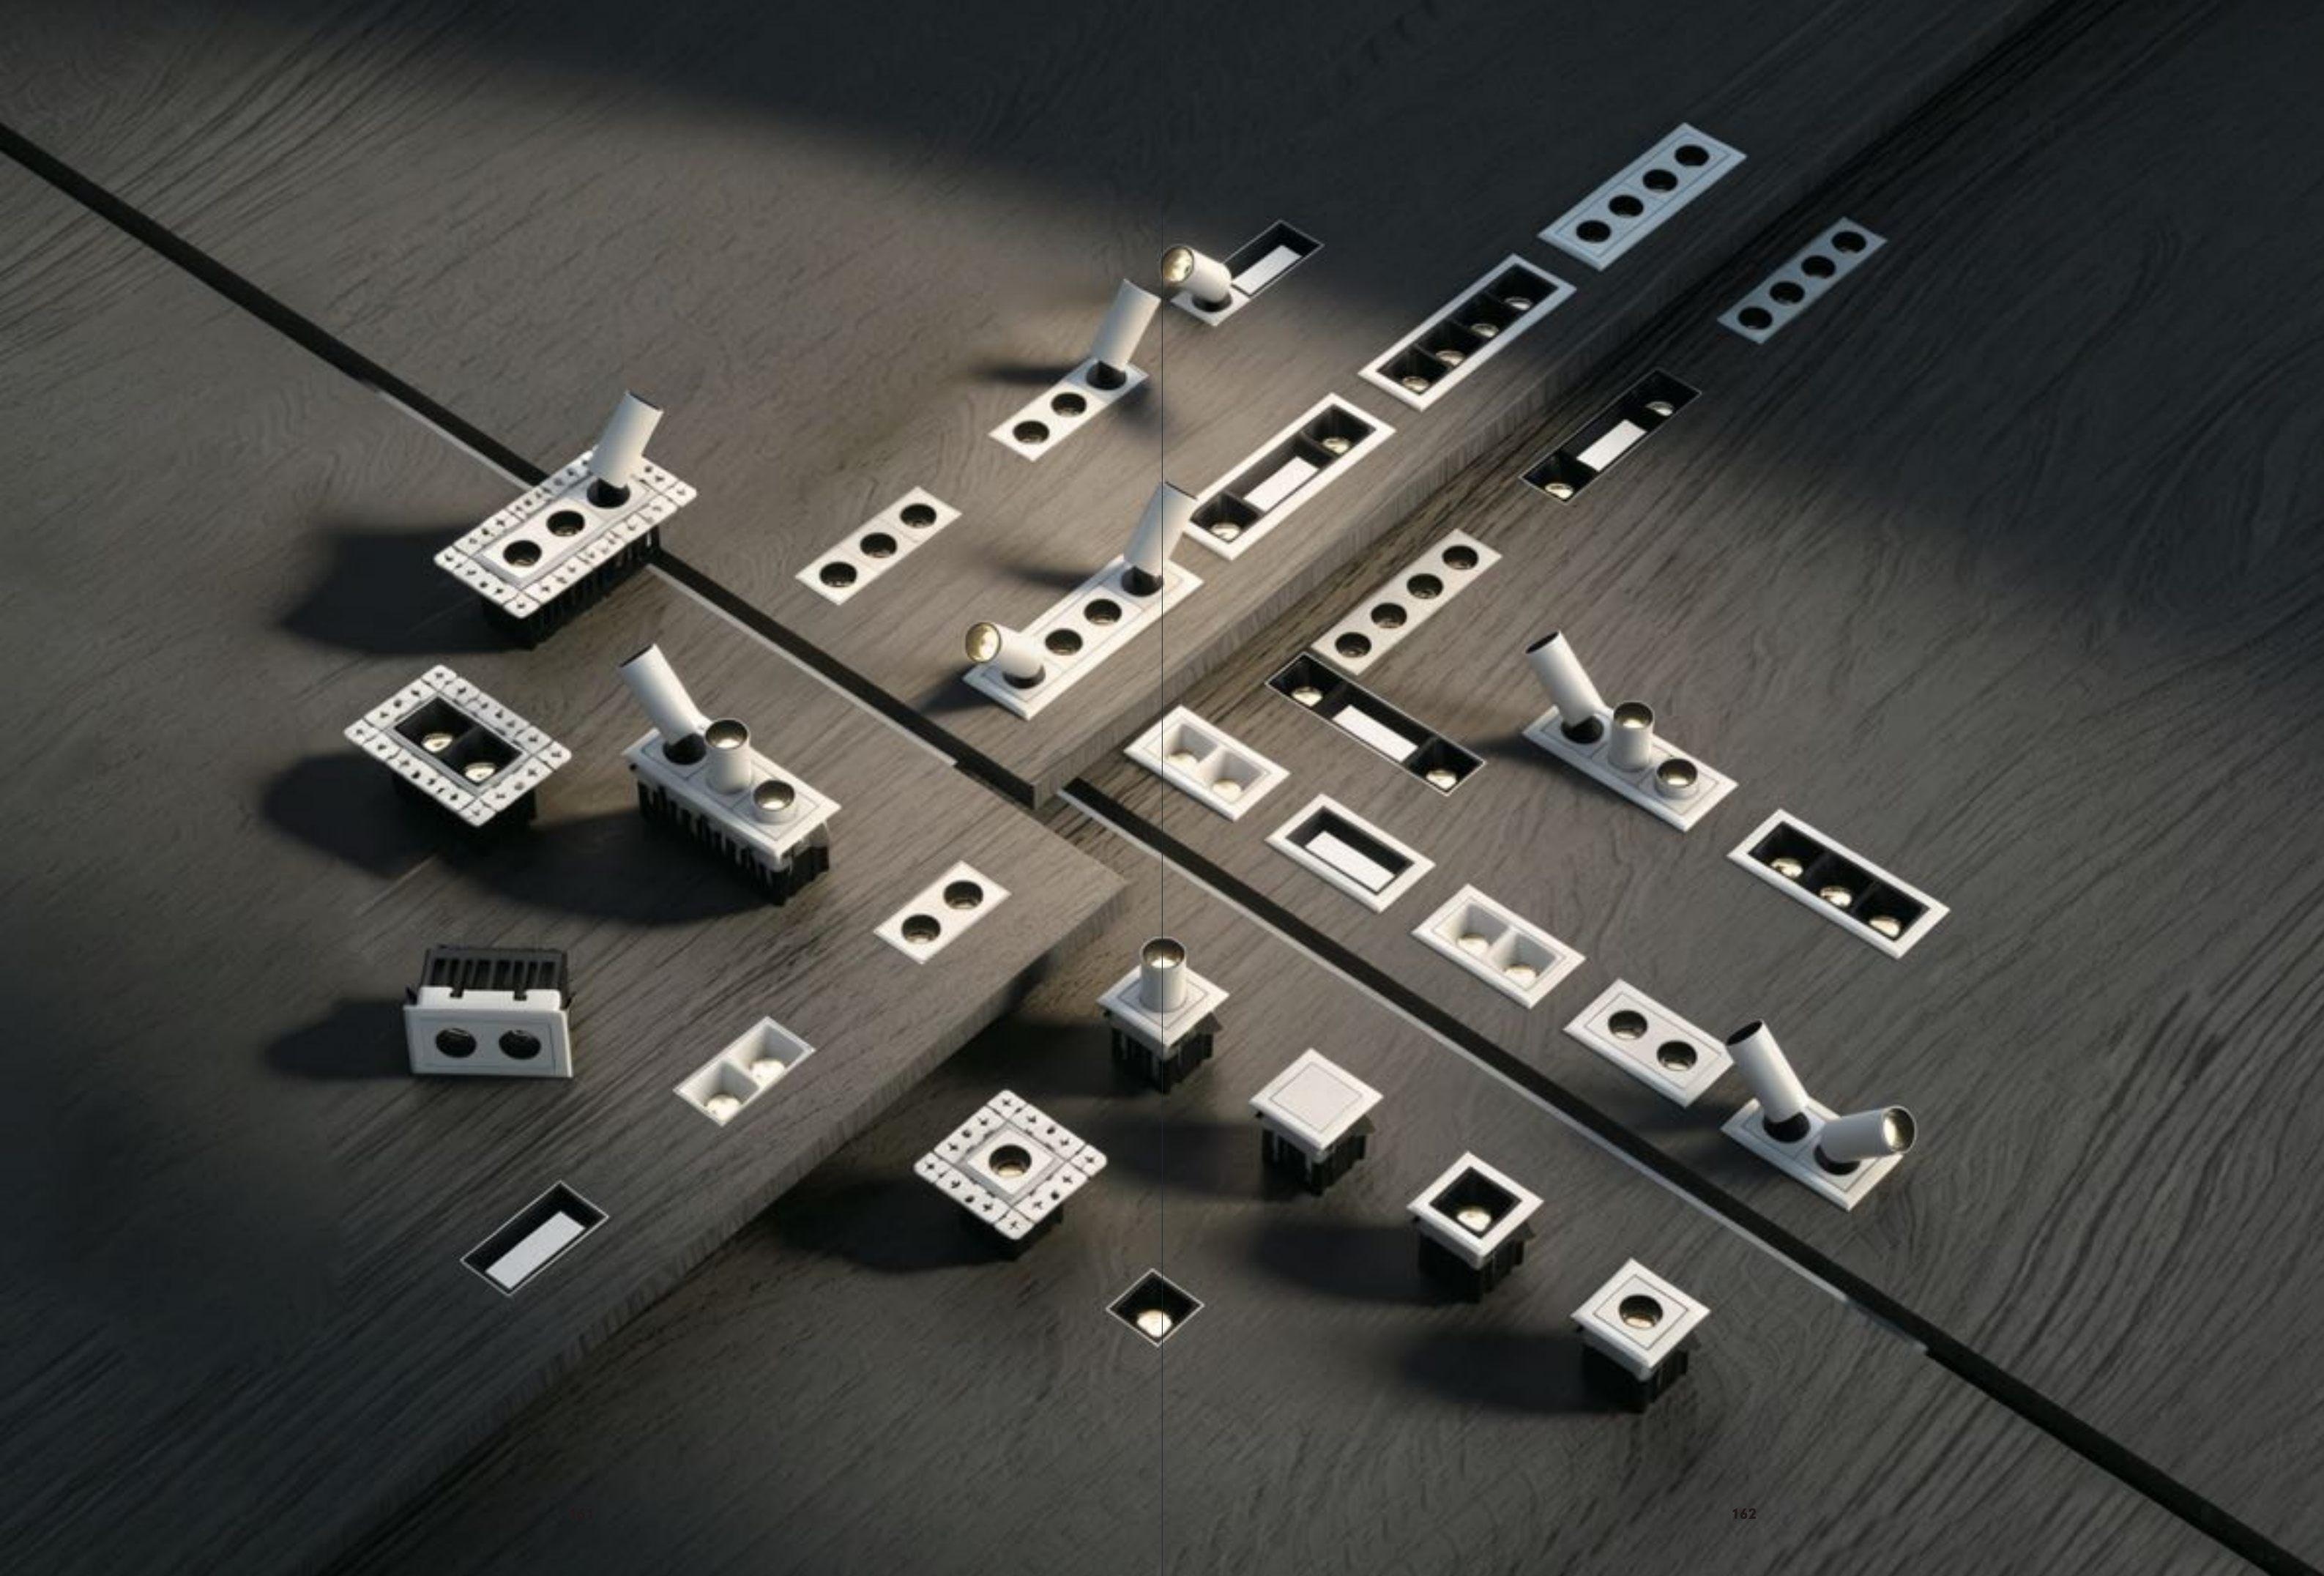

GRIYA



SL74375–MZ01/7W

LED: CREE COB
Power: 7W
Flux(Lm): 426Lm
Angle: 30°/40°/50°
CTN: 50
Material: Aluminum

SL74375–MZ02/7W

LED: CREE COB
Power: 7W
Flux(Lm): 342Lm
Angle: 30°/40°/50°
CTN: 50
Material: Aluminum

SL74375–MZ03/7W

LED: CREE COB
Power: 7W
Flux(Lm): 424Lm
Angle: 30°/40°
CTN: 50
Material: Aluminum


Colortemperature



Color



GRIYA



SL74375–MZ04/12W

LED: CREE COB
Power: 12W
Flux(Lm): 983Lm
Angle: 30°/40°/50°
CTN: 50
Material: Aluminum

SL74375–MZ05/12W

LED: CREE COB
Power: 12W
Flux(Lm): 667Lm
Angle: 30°/40°/50°
CTN: 50
Material: Aluminum

SL74375–MZ06/7W

LED: Bridgelux SMD
Power: 7W
Flux(Lm): 573Lm
Angle: 80°
CTN: 50
Material: Aluminum


Colortemperature



Color



GRIYA



SL74375-1
Bordered kit

CTN: 50
Material: Aluminum+PC

SL74375-2
Bordered kit

CTN: 50
Material: Aluminum+PC

SL74375-3
Bordered kit

CTN: 50
Material: Aluminum+PC

SL74375-4
Bordered kit


CTN: 50
Material: Aluminum+PC

Color

 Matt White

IP
20

GRIYA



SL74375-1
trimless frame

CTN: 50
Material: PC

SL74375-2
trimless frame

CTN: 50
Material: PC

SL74375-3
trimless frame

CTN: 50
Material: PC

SL74375-4
trimless frame

CTN: 50
Material: PC

SL74375-MZ07
Decorative Module

CTN: 50
Material: Aluminum

Color

 Matt White

IP
20






S M A L L

CUBE



CUBE



SL74168-1/1 x 5W

LED: Bridgelux SMD
Power: 1x5W
Flux(Lm): 418Lm
Angle: 20°/35°
CTN: 30
Material: Aluminum


SL74168-2/2 x 5W

LED: Bridgelux SMD
Power: 2x5W
Flux(Lm): 975Lm
Angle: 20°/35°
CTN: 30
Material: Aluminum


SL74168-3/3 x 5W

LED: Bridgelux SMD
Power: 3x5W
Flux(Lm): 1299Lm
Angle: 20°/35°
CTN: 20
Material: Aluminum



Colortemperature



Color



CUBE



SL74169-1/1 x 5W

LED: Bridgelux SMD
Power: 1x5W
Flux(Lm): 418Lm
Angle: 20°/35°
CTN: 30
Material: Aluminum


SL74169-2/2 x 5W

LED: Bridgelux SMD
Power: 2x5W
Flux(Lm): 975Lm
Angle: 20°/35°
CTN: 30
Material: Aluminum


SL74169-3/3 x 5W

LED: Bridgelux SMD
Power: 3x5W
Flux(Lm): 1299Lm
Angle: 20°/35°
CTN: 20
Material: Aluminum

Colortemperature



Color








CUBE



CUBE



SLC78019-1/1 x 5W

LED: Bridgelux SMD
Power: 1x5W
Flux(Lm): 418Lm
Angle: 20°/35°
CTN: 30
Material: Aluminum

SLC78019-2/2 x 5W

LED: Bridgelux SMD
Power: 2x5W
Flux(Lm): 975Lm
Angle: 20°/35°
CTN: 20
Material: Aluminum

SLC78019-3/3 x 5W

LED: Bridgelux SMD
Power: 3x5W
Flux(Lm): 1299Lm
Angle: 20°/35°
CTN: 12
Material: Aluminum


Colortemperature






Color



FOCUS

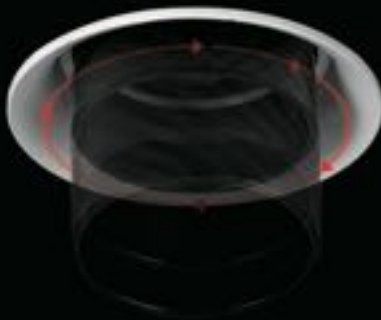

FOCUS



SL74330/5W

LED: LatticePower SMD
Power: 5W
Flux(Lm): 186Lm-163Lm
Angle: 12°-35°
CTN: 30
Material: Aluminum

SL74331/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 641Lm-599Lm
Angle: 11°-55°
CTN: 30
Material: Aluminum

SL74332/15W

LED: Bridgelux COB
Power: 15W
Flux(Lm): 827Lm-845Lm
Angle: 15°-46°
CTN: 20
Material: Aluminum

Colortemperature



Color

Matt White+Black


IP
20

CRI
90

FOCUS



FOCUS

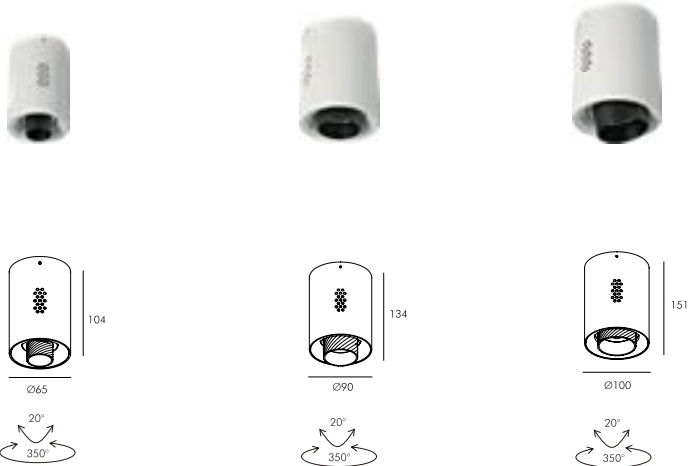

SLC78086/5W

LED: LatticePower SMD
Power: 5W
Flux(Lm): 186Lm-163Lm
Angle: 12°-35°
CTN: 20
Material: Aluminum

SLC78087/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 641Lm-599Lm
Angle: 11°-55°
CTN: 12
Material: Aluminum

SL78088/15W

LED: Bridgelux COB
Power: 15W
Flux(Lm): 827Lm-845Lm
Angle: 15°-46°
CTN: 12
Material: Aluminum

Colortemperature



Color

■ Matt White+Black


IP
20

CRI
90

FOCUS



FOCUS

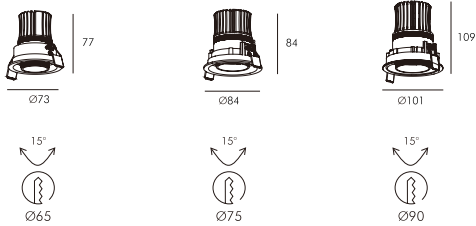

SL74573-2.5/7W

LED: Luminus COB
Power: 7W
Flux(Lm):
Angle:
CTN: 30
Material: Aluminum

SL74573-3/12W

LED: Luminus COB
Power: 12W
Flux(Lm):
Angle:
CTN: 30
Material: Aluminum

SL74573-4/18W

LED: Luminus COB
Power: 18W
Flux(Lm):
Angle:
CTN: 30
Material: Aluminum

Colortemperature



Color


☐ Sand White+Black

IP	CRI
20	90



FOCUS

FOCUS

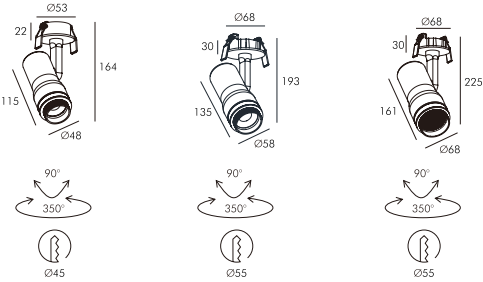

SL74574/7W

LED: Luminus COB
Power: 7W
Flux(Lm):
Angle:
CTN: 20
Material: Aluminum

SL74575/12W

LED: Luminus COB
Power: 12W
Flux(Lm):
Angle:
CTN: 20
Material: Aluminum

SL74576/18W

LED: Luminus COB
Power: 18W
Flux(Lm):
Angle:
CTN: 20
Material: Aluminum

Colortemperature



Color


☒ Sand White+Black

IP	CRI
20	90



FOCUS

FOCUS



HL77066/12W

LED: Luminus COB
Power: 12W
Flux(Lm):
Angle:
CTN: 20
Material: Aluminum

Colortemperature



Color

☒ Sand White+Black

IP
20

CRI
90

SUN






SUN

In fact,
art and beauty

is what all along pursuing. But to us the most
important thing is that we must think human-
oriented structure.

SUN



SL74149/7W

LED: Prolight SMD
Power: 7W
Flux(Lm): 418Lm
Angle: 24°+ ∠ 25°/30°+ ∠ 25°
CTN: 30
Material: Aluminum

SL74150/7W

LED: Prolight SMD
Power: 7W
Flux(Lm): 418Lm
Angle: 24°+ ∠ 25°/30°+ ∠ 25°
CTN: 30
Material: Aluminum


SLC78052/7W

LED: Prolight SMD
Power: 7W
Flux(Lm): 418Lm
Angle: 24°+ ∠ 25°/30°+ ∠ 25°
CTN: 12
Material: Aluminum





Colortemperature



Color



SUN



SL74230/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 410Lm
Angle: 24°/30°/40°
CTN: 30
Material: Aluminum

SL74231/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 410Lm
Angle: 24°/30°/40°
CTN: 20
Material: Aluminum


SLC78054/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 410Lm
Angle: 24°/30°/40°
CTN: 12
Material: Aluminum

Colortemperature




Color




SUN



SUN

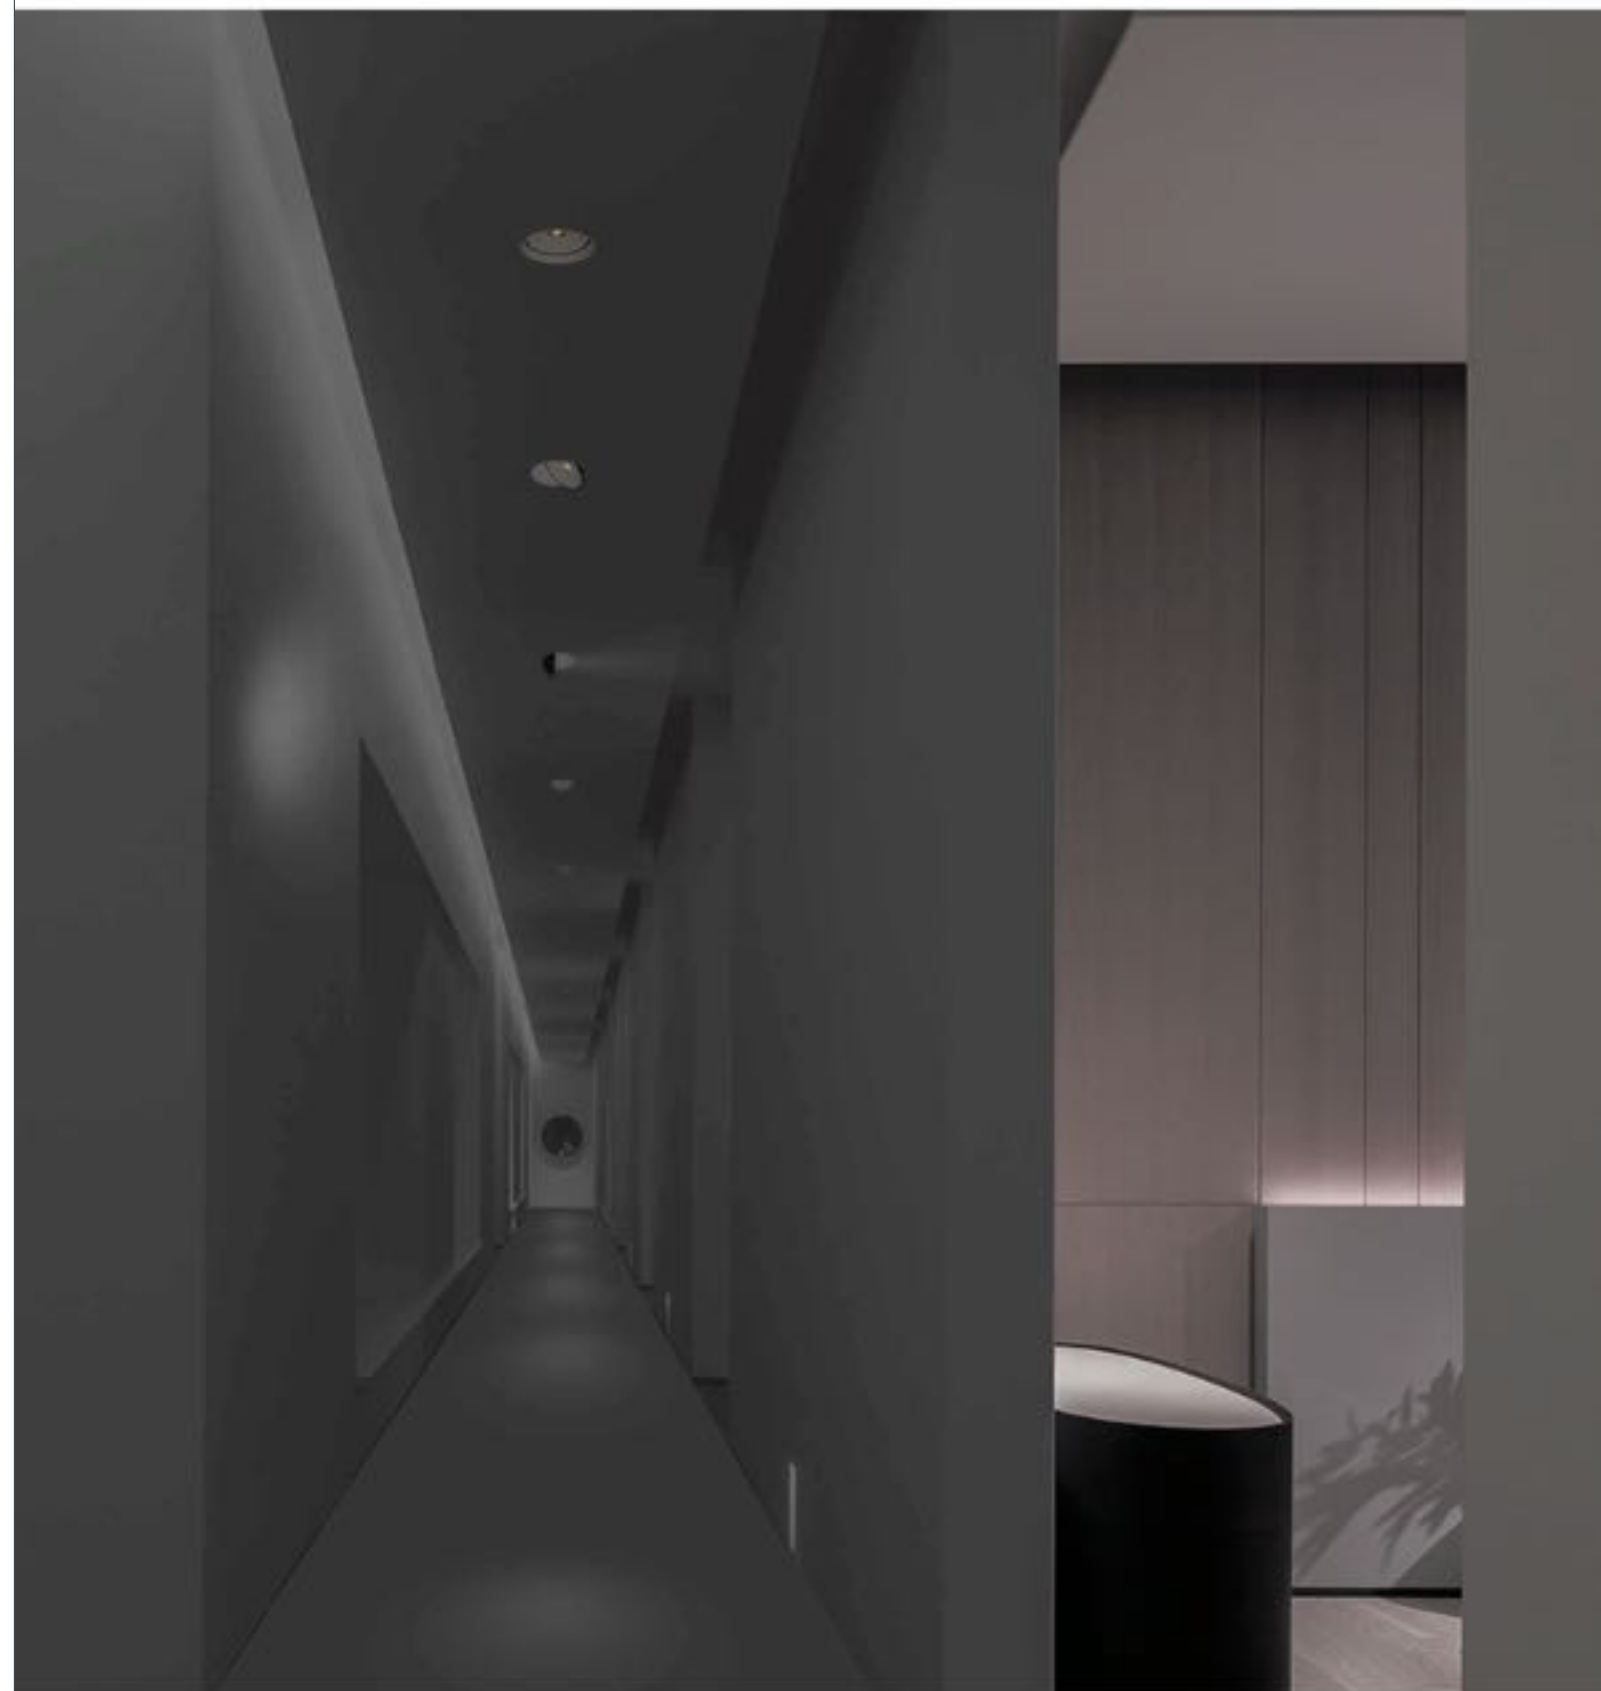

SUN

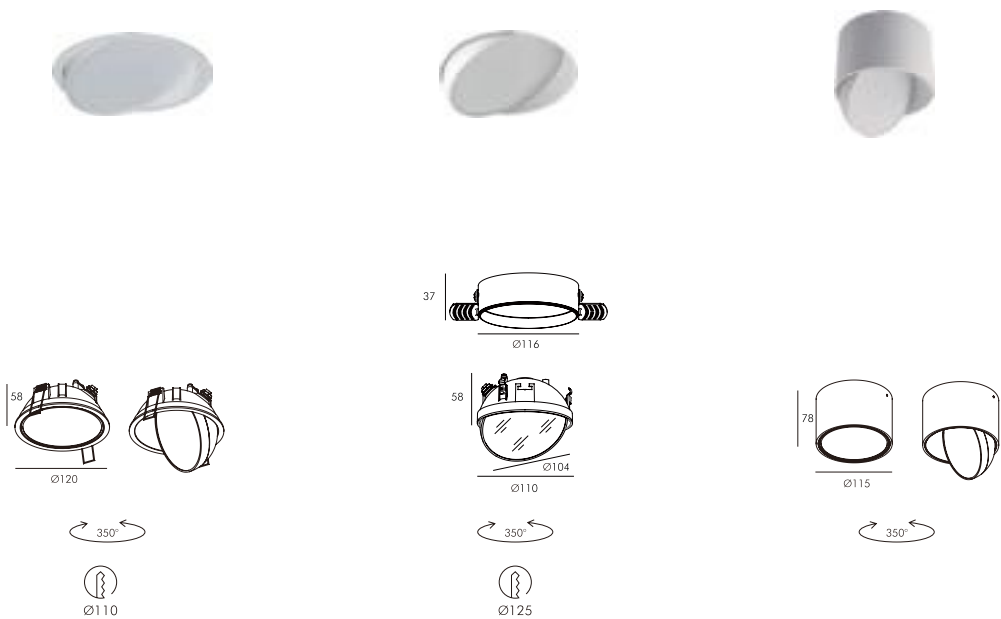

DL73076/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 501Lm
Angle: 110°
CTN: 30
Material: Aluminum

DL73077/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 501Lm
Angle: 110°
CTN: 20
Material: Aluminum

DLC79026/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 501Lm
Angle: 110°
CTN: 12
Material: Aluminum

Colortemperature



Color (DDL73076/77)


Sand White

Color (DLC79026)

Sand White
Sand Black+White

IP	CRI
20	90

SUN

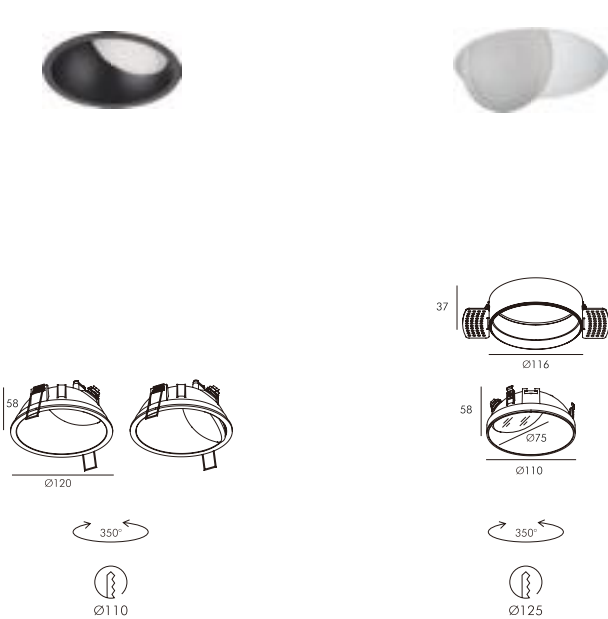


DL73074/3W

LED: Bridgelux SMD
Power: 3W
Flux(Lm): 210Lm
Angle: 100°
CTN: 30
Material: Aluminum

DL73075/3W

LED: Bridgelux SMD
Power: 3W
Flux(Lm): 210Lm
Angle: 100°
CTN: 20
Material: Aluminum

Colortemperature



Color



Sand White
Sand Black

IP	CRI
20	90

DIX



DIX



SL74222/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 368Lm
Angle: 24°/20°/30°
CTN: 30
Material: Aluminum


SL74223/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 368Lm
Angle: 24°/20°/30°
CTN:20
Material: Aluminum


Colortemperature



Color (SL74222/7W)




Color (SL74223/7W)






DIX



SLC78049-1/1x7W

LED: Bridgelux COB
Power: 1x7W
Flux(Lm): 368Lm
Angle: 24°/20°/30°
CTN: 12
Material: Iron+Aluminum




SLC78049-2/2x7W

LED: Bridgelux COB
Power: 2x7W
Flux(Lm): 865Lm
Angle: 24°/20°/30°
CTN: 8
Material: Iron+Aluminum

Colortemperature



Color







SIRMI



SIRMI



SIRMI



SL74246/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 428Lm
Angle: 24°/20°/35°
CTN: 30
Material: Aluminum

SL74247/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 428Lm
Angle: 24°/20°/35°
CTN: 30
Material: Aluminum

SLC78056/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 428Lm
Angle: 24°/20°/35°
CTN: 30
Material: Aluminum


SLC78057/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 428Lm
Angle: 24°/20°/35°
CTN: 30
Material: Aluminum



Colortemperature



Color



SIRMI



SLC78058-1/1x7W

LED: Bridgelux COB
Power: 1x7W
Flux(Lm): 428Lm
Angle: 24°/20°/35°
CTN: 20
Material: Iron+Aluminum


SLC78058-2/2x7W

LED: Bridgelux COB
Power: 2x7W
Flux(Lm): 940Lm
Angle: 24°/20°/35°
CTN: 12
Material: Iron+Aluminum

Colortemperature




Color





SIRMi

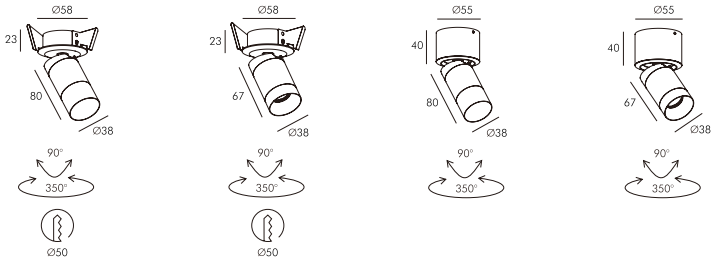

SL74570/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 392Lm
Angle: 24°/30°/40°
CTN: 30
Material: Aluminum

SL74577/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 419Lm
Angle: 24°/30°/40°
CTN: 30
Material: Aluminum

SLC78106/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 387Lm
Angle: 24°/30°/40°
CTN: 30
Material: Aluminum

SLC78104/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 411Lm
Angle: 24°/30°/40°
CTN: 30
Material: Aluminum

Colortemperature





Color

■ Matt Black


IP
20

CRI
90

SIRMI

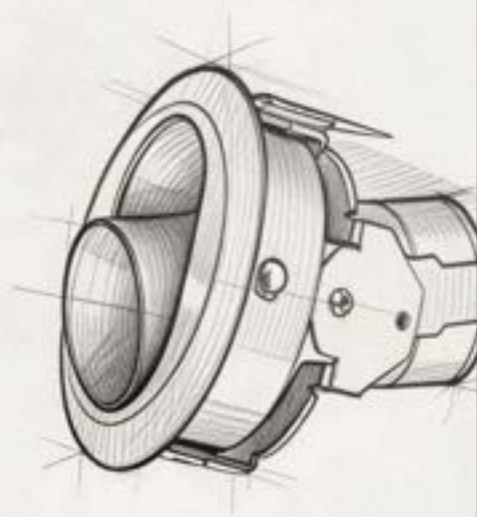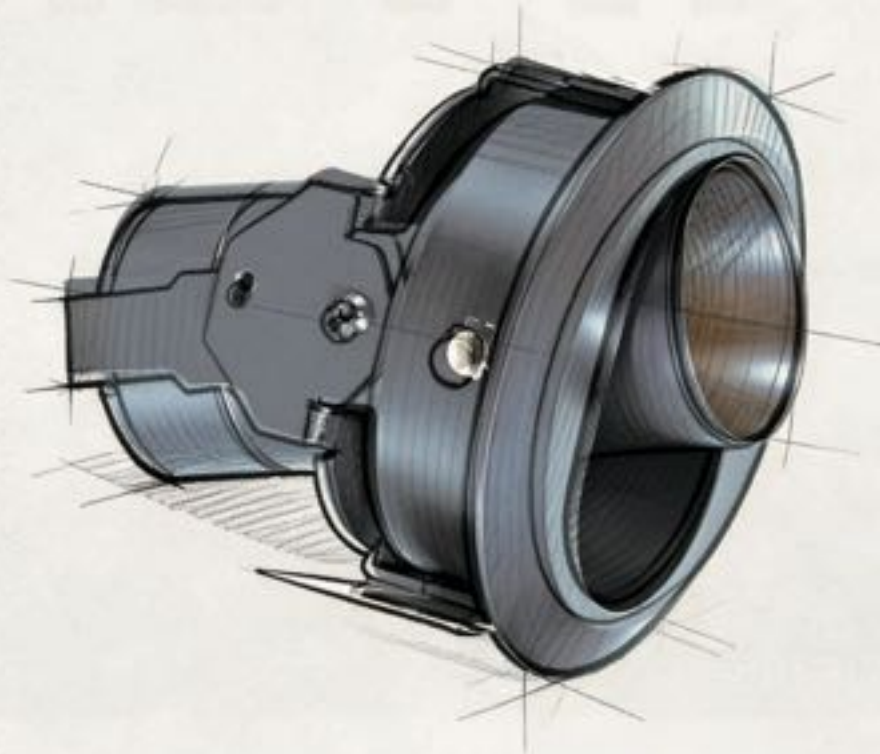

SIRMI



SL74571/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 127-197Lm
Angle: 11°-16°
CTN: 30
Material: Aluminum

Colortemperature



Color

■ Matt Black


IP
20

CRI
90

SIRMI



SIRMI



SL74572/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm):
Angle:
CTN: 30
Material: Aluminum

Colortemperature



Color

☒ Matt Black

IP
20

CRI
90




MERLANO



5°

MERLANO




SL74194/5W

LED: OSRAM SMD
Power: 5W
Flux(Lm): 143Lm
Angle: 5°
CTN: 30
Material: Aluminum

Colortemperature



Color






IP
20

CRI
90

MERLANO



MERLANO



SL74196/5W

LED: OSRAM SMD
Power: 5W
Flux(Lm): 143Lm
Angle: 5°
CTN: 30
Material: Aluminum

SLC78084/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 139Lm
Angle: 5°
CTN: 30
Material: Aluminum


SLC78085/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 139Lm
Angle: 5°
CTN: 30
Material: Aluminum

Colortemperature



Color





MERLANO

MERLANO



WLB151/1 x 3W

LED: OSRAM SMD
Power: 1x3W
Angle: 5°
CTN: 30
Material: Aluminum

WLB152/2 x 3W

LED: OSRAM SMD
Power: 2x3W
Angle: 5°
CTN: 30
Material: Aluminum

Colortemperature



Color

- Sand White+Black
- Gold+Black

IP
20

CRI
90




MARCO

Light and space

The art of light and space, feeling heaven with light and shadow.

MARCO

MARCO



SL74129/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 501Lm
Angle: 30°/40°
CTN: 30
Material: Aluminum

SLC74129-1/1 x 7W

LED: Bridgelux COB
Power: 1x7W
Flux(Lm): 501Lm
Angle: 30°/40°
CTN: 20
Material: Iron+Aluminum

SLC74129-2/2 x 7W

LED: Bridgelux COB
Power: 2x7W
Flux(Lm): 1004Lm
Angle: 30°/40°
CTN: 12
Material: Iron+Aluminum

Colortemperature







Color

 Sand White+Gold



MARCO



SL74131/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 505Lm
Angle: 30°/40°
CTN: 30
Material: Aluminum

SLC74131-1/1 x 7W

LED: Bridgelux COB
Power: 1x7W
Flux(Lm): 505Lm
Angle: 30°/40°
CTN: 20
Material: Iron+Aluminum

SLC74131-2/2 x 7W

LED: Bridgelux COB
Power: 2x7W
Flux(Lm): 1008Lm
Angle: 30°/40°
CTN: 12
Material: Iron+Aluminum

SLC74131-3/3 x 7W

LED: Bridgelux COB
Power: 3x7W
Flux(Lm): 1580Lm
Angle: 30°/40°
CTN: 12
Material: Iron+Aluminum

Colortemperature





Color

 Sand Black+Gold





WATER



SL74372/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 453Lm
Angle: 30°
CTN: 30
Material: Aluminum

SL74396/15W

LED: Bridgelux COB
Power: 15W
Flux(Lm): 696Lm
Angle: 30°
CTN: 20
Material: Aluminum

Colortemperature




Color

Sand Black

IP
20

CRI
90

WATER




SLC78107/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 478Lm
Angle: 24°
CTN: 30
Material: Aluminum

SLC78109/15W

LED: Bridgelux COB
Power: 15W
Flux(Lm): 691Lm
Angle: 20°
CTN: 30
Material: Aluminum

Colortemperature




Color

■ Sand Black+Gun Grey

IP	CRI
20	90

WATER

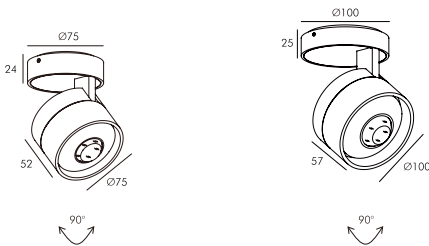

SLC78108/10W

LED: Bridgelux COB
Power: 10W
Flux(Lm): 478Lm
Angle: 24°
CTN: 30
Material: Aluminum

SLC78110/15W

LED: Bridgelux COB
Power: 15W
Flux(Lm): 691Lm
Angle: 20°
CTN: 20
Material: Aluminum

Colortemperature



Color

■ Sand Black+Gun Grey

IP	CRI
20	90




WATER



IP44

WATER



SL74190/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 221Lm
Angle: 24°/30°
CTN: 50
Material: Aluminum




Colortemperature



Color




WATER




SL74091-2.5/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 382Lm
Angle: 24°
CTN: 30
Material: Aluminum



SL74091-3/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 690Lm
Angle: 24°
CTN: 30
Material: Aluminum



SL74091-4/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 905Lm
Angle: 20°
CTN: 30
Material: Aluminum


Colortemperature



Color



WATER

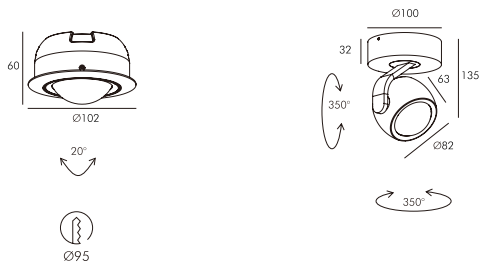

SL74301/8W

LED: Bridgelux COB
Power: 8W
Flux(Lm): 296Lm
Angle: 80°
CTN: 20
Material: Aluminum

SLC78050/8W

LED: Bridgelux COB
Power: 8W
Flux(Lm): 296Lm
Angle: 80°
CTN: 12
Material: Aluminum

Colortemperature




Color

- Rose Gold
- Shiny Chrome

IP	CRI
20	90

WATER

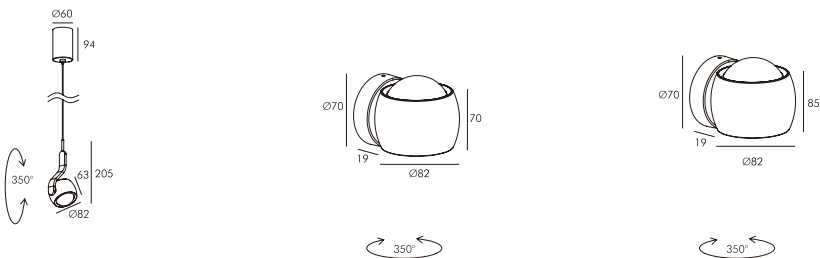

HL7771/8W

LED: Bridgelux COB
Power: 8W
Flux(Lm): 296Lm
Angle: 80°
CTN: 12
Material: Aluminum

WLB139-1/1x5W

LED: Bridgelux COB
Power: 1x5W
Angle: 80°
CTN: 20
Material: Aluminum

WLB139-2/2x2.5W

LED: Bridgelux COB
Power: 2x2.5W
Angle: 80°
CTN: 20
Material: Aluminum

Colortemperature



Color


- Rose Gold+Black
- Shiny Chrome+Black

IP	CRI
20	90





GUNTER

GUNTER

GUNTER

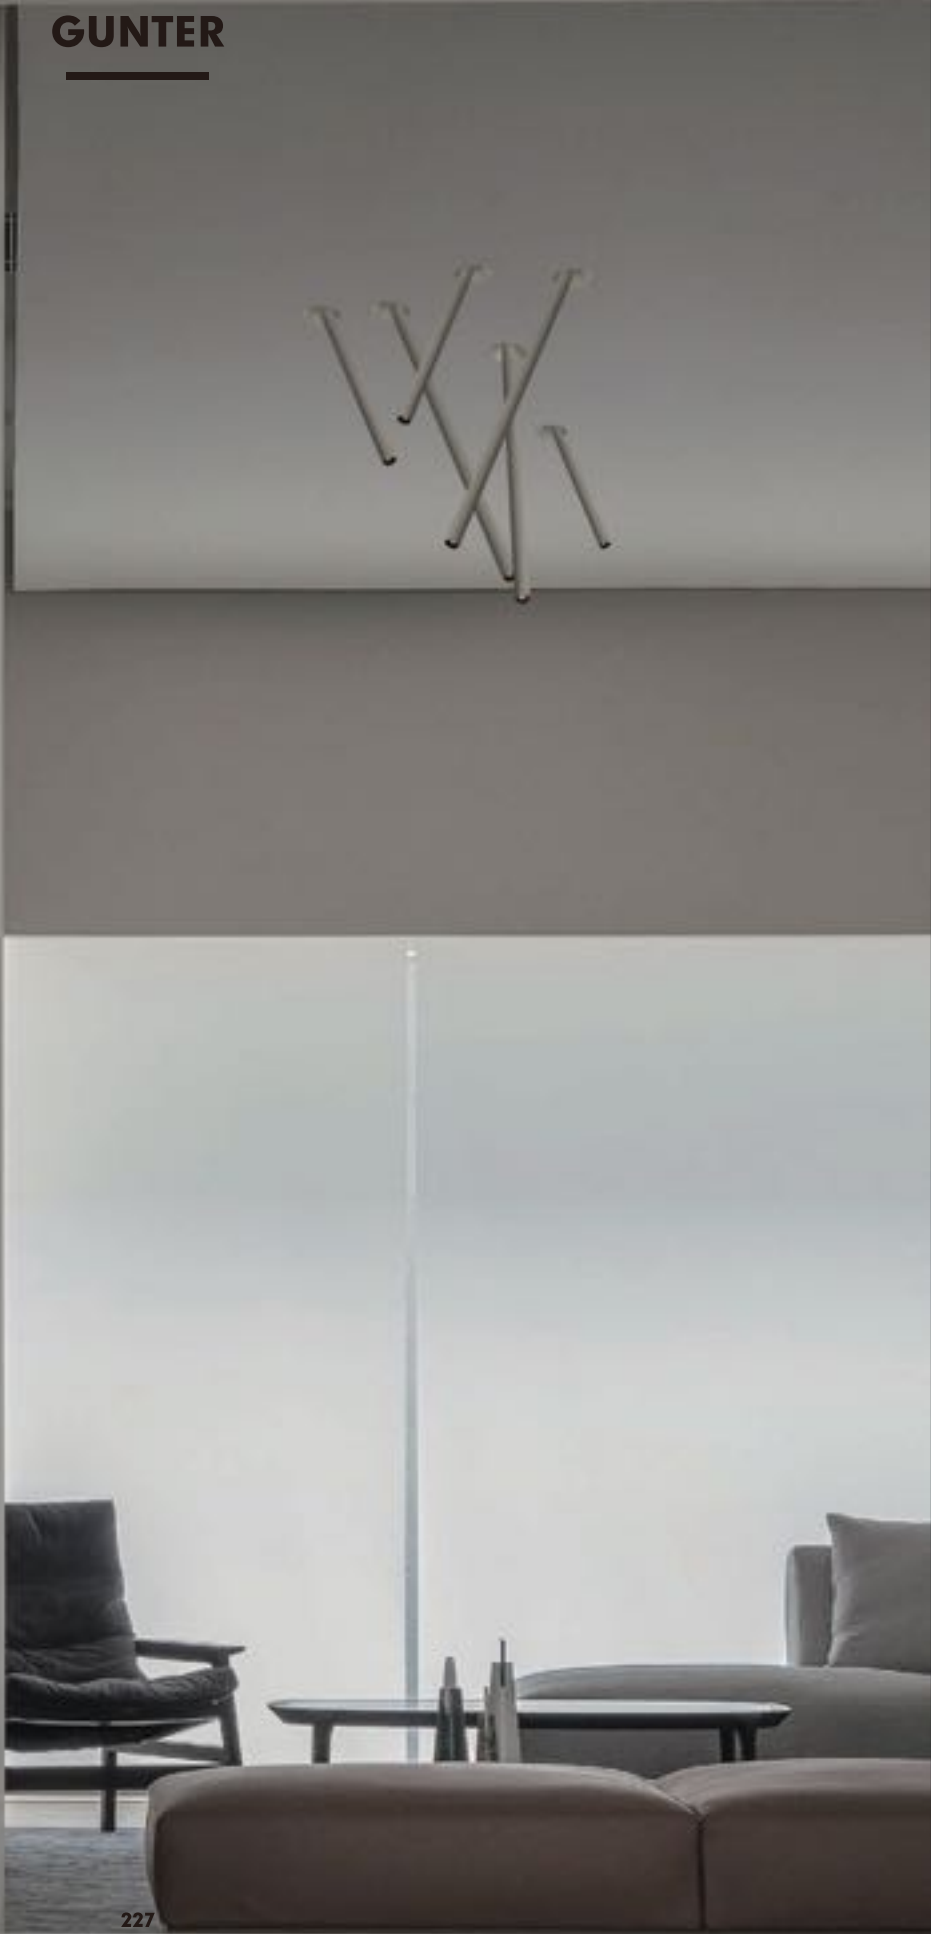

GUNTER



SL74197/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 125Lm
Angle: 15°/24°
CTN: 20
Material: Aluminum

SL74198/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 125Lm
Angle: 15°/24°
CTN: 20
Material: Aluminum

SL74199/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 125Lm
Angle: 15°/24°
CTN: 20
Material: Aluminum

SL74200/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 125Lm
Angle: 15°/24°
CTN: 20
Material: Aluminum

Colortemperature



Color

☐ Sand White+Black

IP	CRI
20	90

GUNTER



GUNTER




HL7766/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 125Lm
Angle: 15°/24°
CTN: 20
Material: Aluminum

HL7767/3W

LED: OSRAM SMD
Power: 3W
Flux(Lm): 125Lm
Angle: 15°/24°
CTN: 20
Material: Aluminum

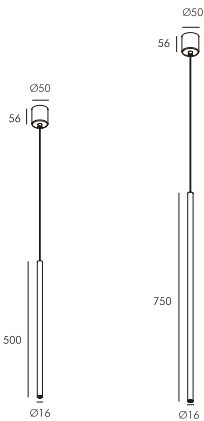

Colortemperature



Color

■ Sand White+Black

IP	CRI
20	90

LED WALL WASHER


LIGHT
SERIES



LODI



LODI

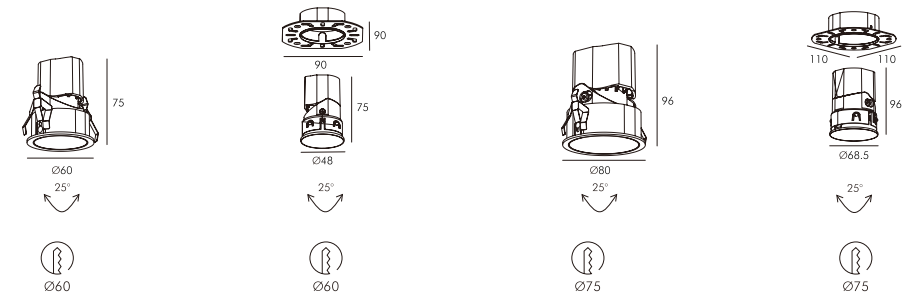

FL76090/7W

LED: LK COB
Power: 7W
Flux(Lm): 321Lm
Angle: 15°/24°/36°
CTN: 30
Material: Aluminum

FL76091/7W

LED: LK COB
Power: 7W
Flux(Lm): 321Lm
Angle: 15°/24°/36°
CTN: 30
Material: Aluminum

FL76092/10W

LED: LK COB
Power: 10W
Flux(Lm): 567Lm
Angle: 15°/24°/36°
CTN: 30
Material: Aluminum

FL76093/10W

LED: LK COB
Power: 10W
Flux(Lm): 567Lm
Angle: 15°/24°/36°
CTN: 30
Material: Aluminum

Colortemperature


2700K 4000K 6500K

Color


 Sand White+Black

IP	CRI
20	90

SARDIN

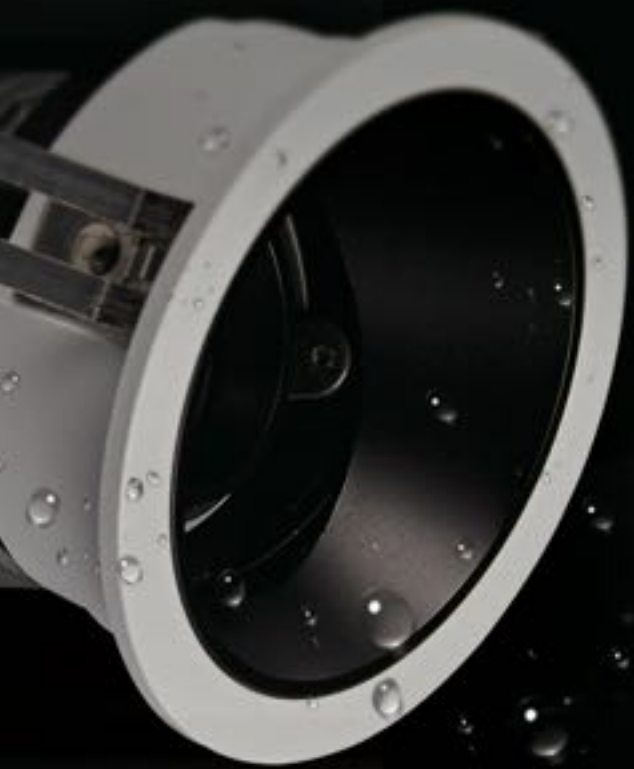

SARDIN

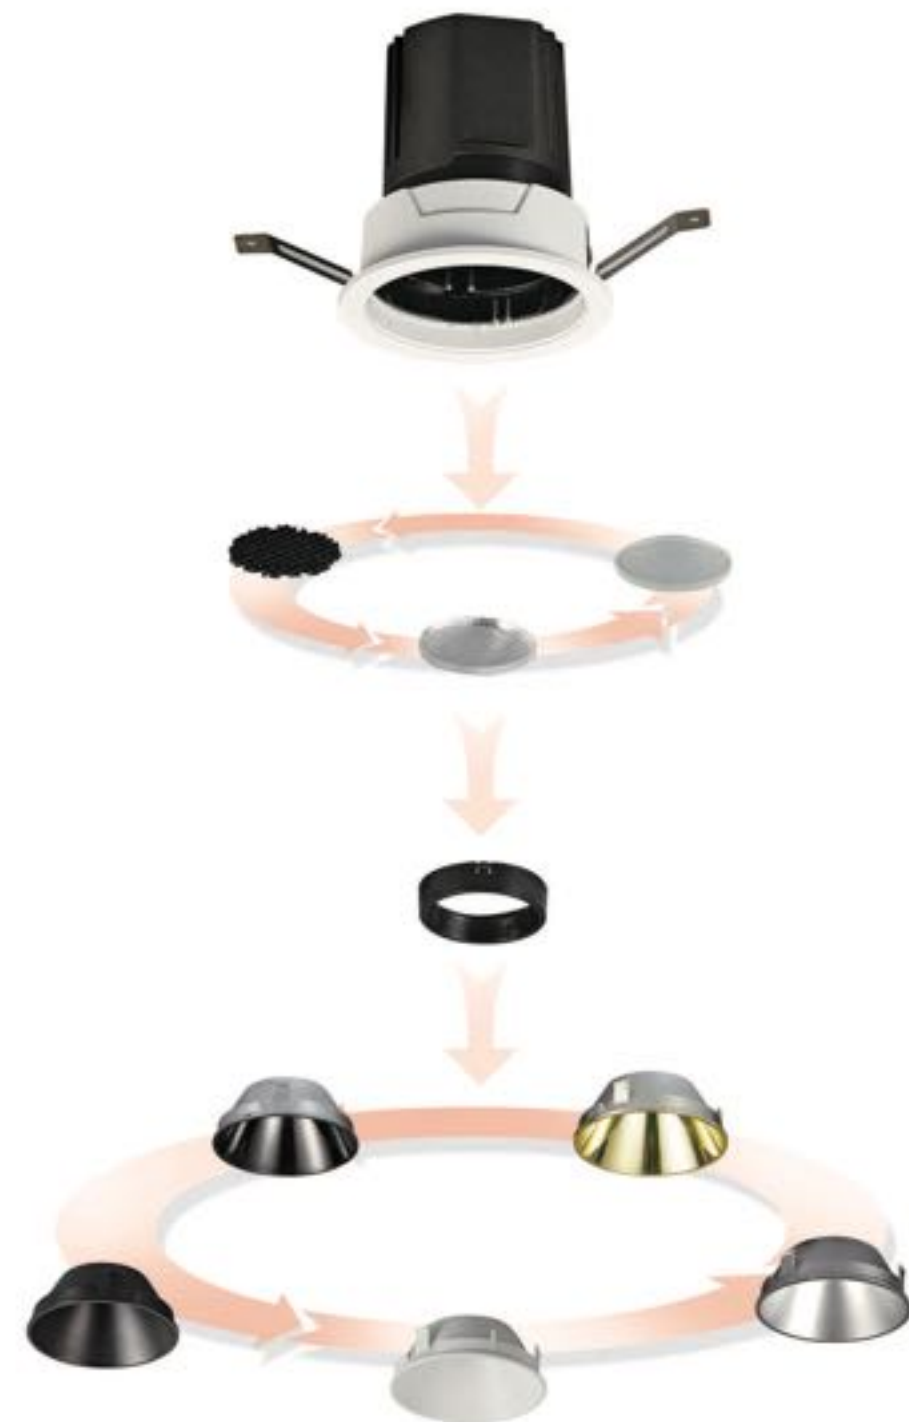

SARDIN

SARDIN

FL76039/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 408Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum+PC

FL76039/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 785Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum+PC

FL76040/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 402Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum+PC

FL76040/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 760Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum+PC

Colortemperature


2700K 3000K 4000K 5000K

IP

54

CRI




97



Color

- Sand White+White
- Sand White+Black
- Sand White+Silver

SARDIN



FL76040B/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 480Lm
Angle: 24°/15°/35° ∠ 10°
CTN: 30
Material: Aluminum+PC

FL76041/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 264Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum+PC

FL76041/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 460Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum+PC

FL76042/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 283Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum+PC


FL76042/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 530Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum+PC


Colortemperature



Color



IP	CRI
54	97



SARDIN



Colore


SARDIN



SARDIN




SARDIN

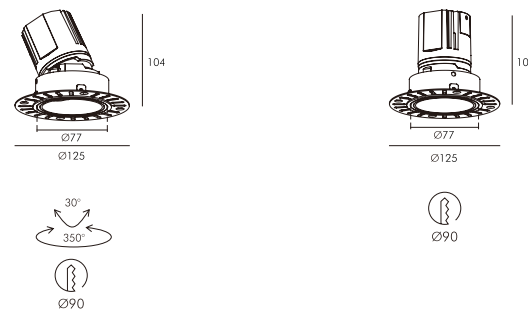


FL76043/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 408Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum+PC




FL76043/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 785Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum+PC




FL76044/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 402Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum+PC



FL76044/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 760Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum+PC




Color

□ Sand White+White
□ Sand White+Black
□ Sand White+Silver


IP	CRI
54	97

SARDIN

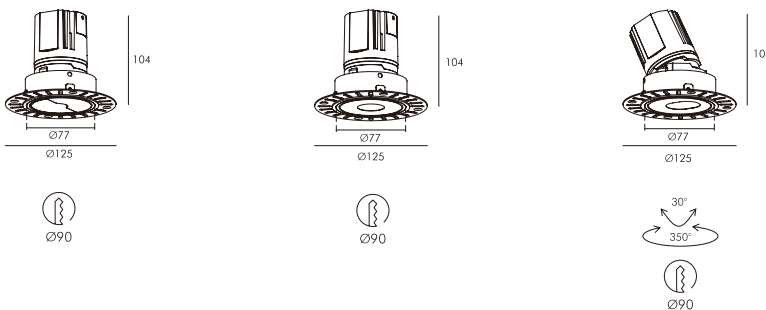


FL76044B/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 480Lm
Angle: 24°/15°/35° ∠ 10°
CTN: 20
Material: Aluminum+PC




FL76045/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 264Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum+PC




FL76045/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 460Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum+PC




FL76046/7W

LED: Bridgelux COB
Power: 7W
Flux(Lm): 283Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum+PC



FL76046/12W

LED: Bridgelux COB
Power: 12W
Flux(Lm): 530Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum+PC




Color

□ Sand White



IP	CRI
54	97



MILAN

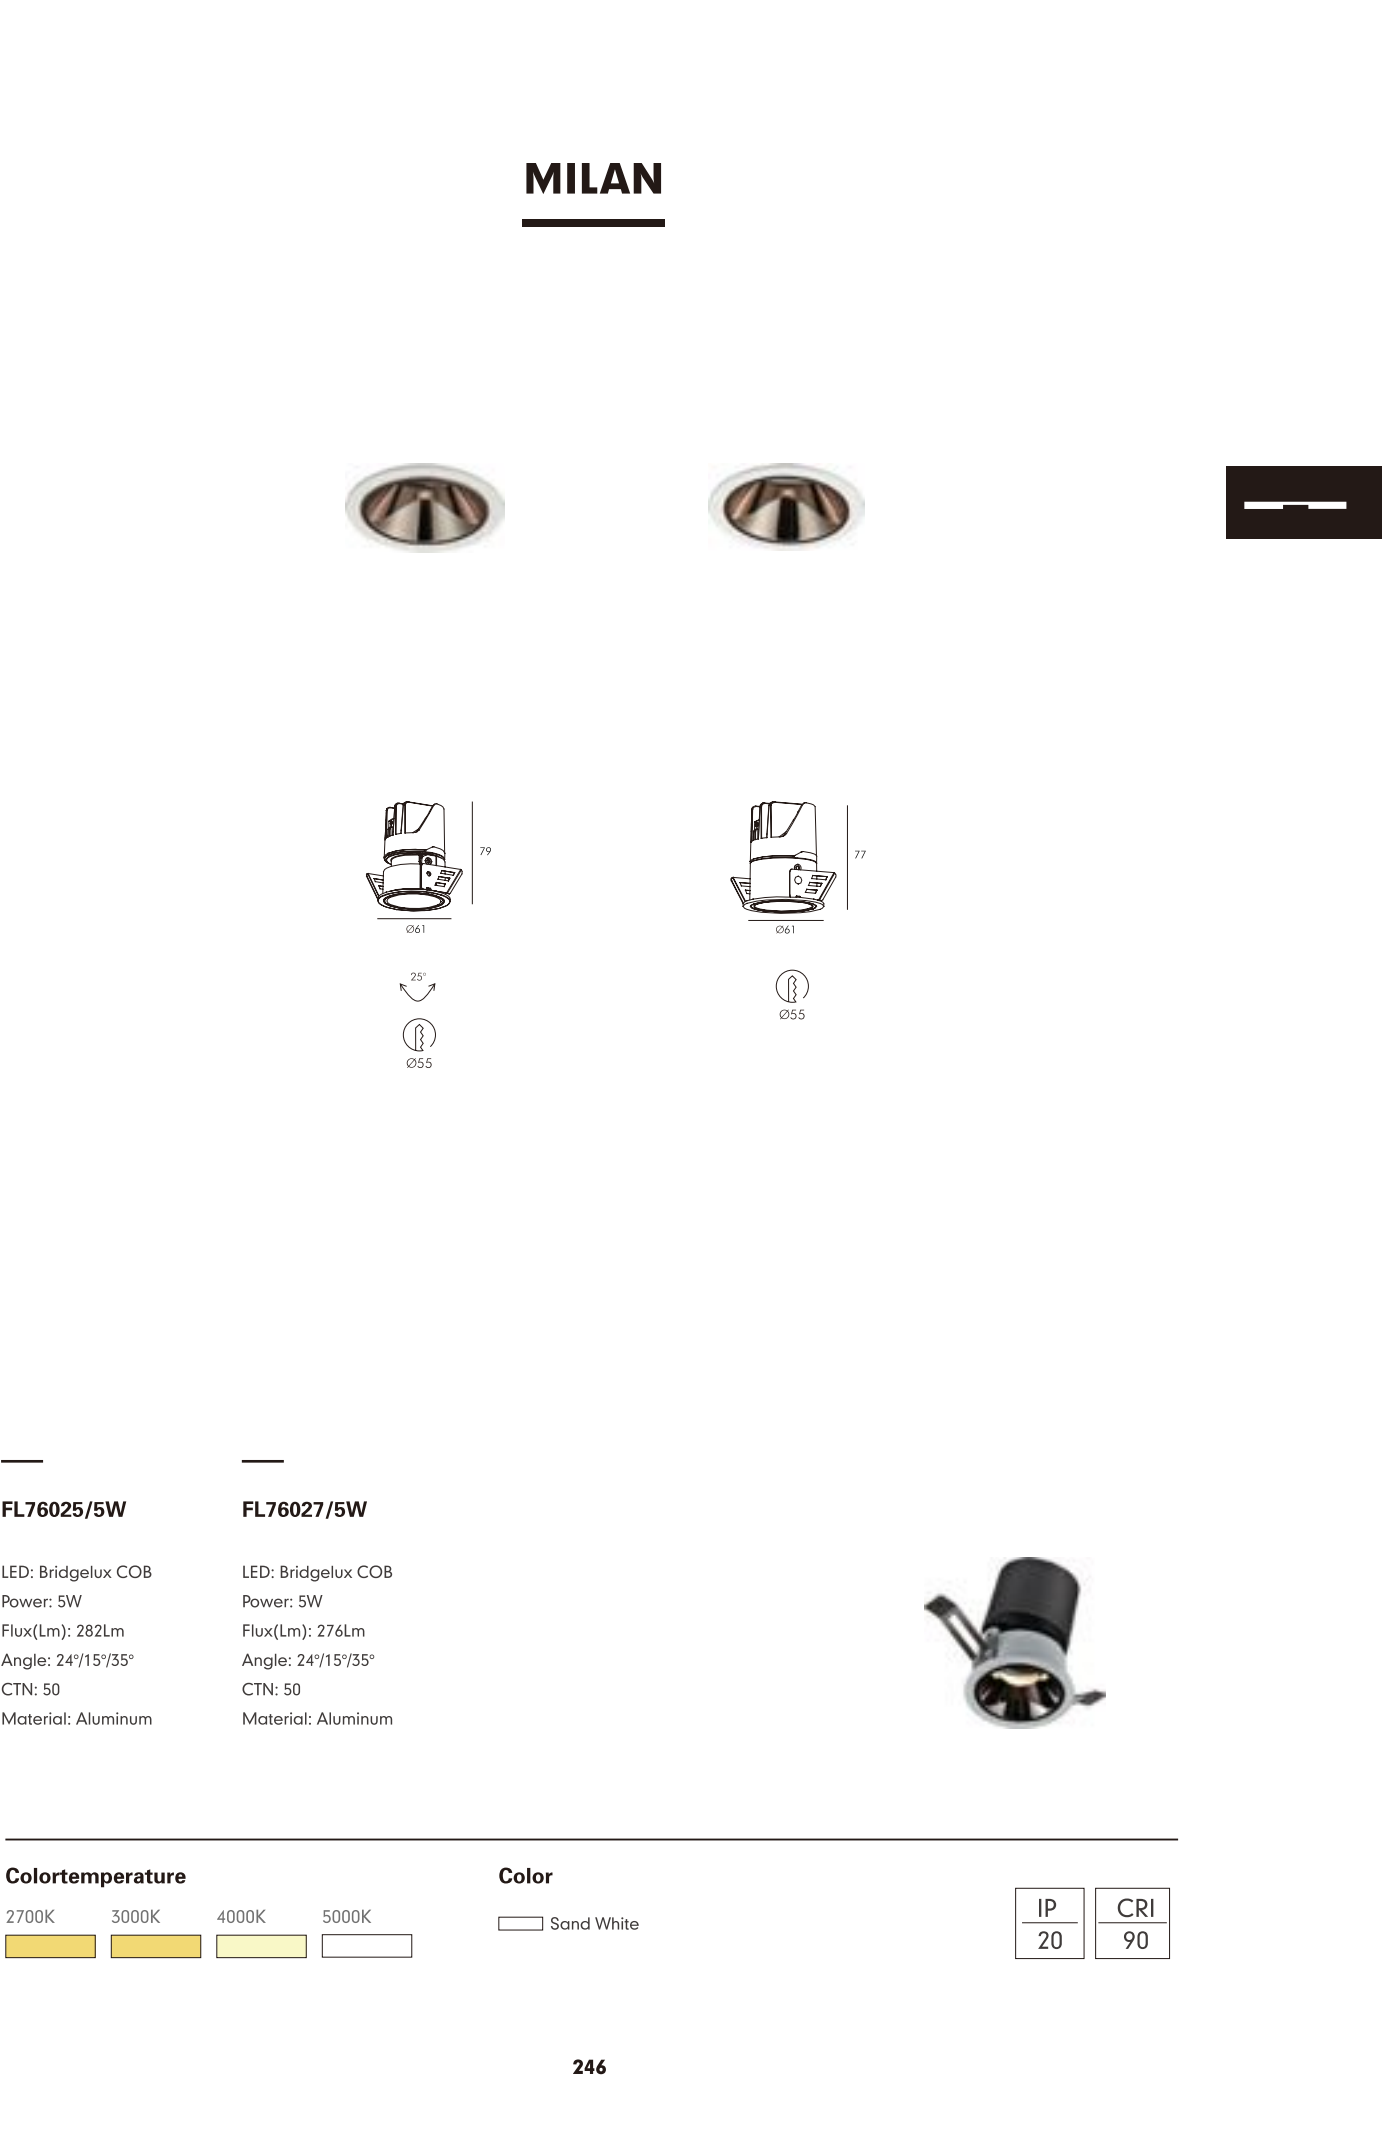

MILAN



FL76025/5W

LED: Bridgelux COB
Power: 5W
Flux(Lm): 282Lm
Angle: 24°/15°/35°
CTN: 50
Material: Aluminum

FL76027/5W

LED: Bridgelux COB
Power: 5W
Flux(Lm): 276Lm
Angle: 24°/15°/35°
CTN: 50
Material: Aluminum



Colortemperature





Color

□ Sand White

IP	CRI
20	90

MILAN



FL76001/7W

LED: Bridgelux COB
Power: 7W/12W
Flux(Lm): 378Lm/857Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

FL76003/7W

LED: Bridgelux COB
Power: 7W/12W
Flux(Lm): 359Lm/835Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

Colortemperature





Color

Sand White

IP	CRI
20	90

MILAN



FL76005/7W

LED: Bridgelux COB
Power: 7W/12W
Flux(Lm): 378Lm/857Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

FL76007/7W

LED: Bridgelux COB
Power: 7W/12W
Flux(Lm): 359Lm/835Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

Colortemperature




Color

Sand White



IP	CRI
20	90

MILAN

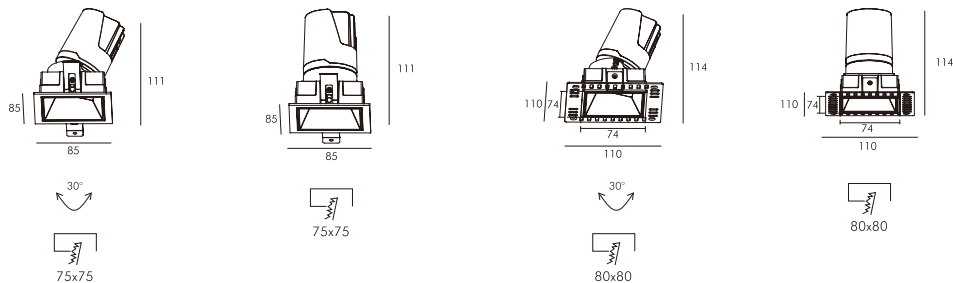

FL76015/7W

LED: Bridgelux COB
Power: 7W/12W
Flux(Lm): 450Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

FL76016/7W

LED: Bridgelux COB
Power: 7W/12W
Flux(Lm): 450Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum


FL76033/7W

LED: Bridgelux COB
Power: 7W/12W
Flux(Lm): 450Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

FL76034/7W

LED: Bridgelux COB
Power: 7W/12W
Flux(Lm): 450Lm
Angle: 24°/15°/35°
CTN: 30
Material: Aluminum

Colortemperature




Color

☐ Sand White

IP	CRI
20	90

MILAN

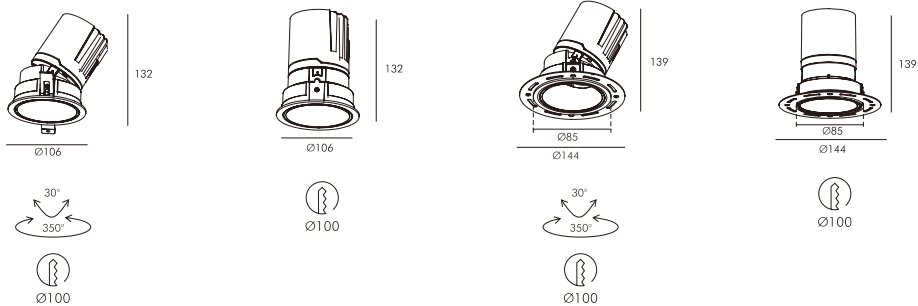

FL76017/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 810Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum

FL76018/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 820Lm
Angle: 24°/15°/35°
CTN: 20
Material: Aluminum


FL76035/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 810Lm
Angle: 24°/15°/35°
CTN: 12
Material: Aluminum

FL76036/18W

LED: Bridgelux COB
Power: 18W
Flux(Lm): 820Lm
Angle: 24°/15°/35°
CTN: 12
Material: Aluminum

Colortemperature



Color

☐ Sand White

IP	CRI
20	90